



Heper Lighting







Malıköy, Başkent OSB, 22.
Cd. No: 2, 06909 Sincan/
Ankara/Turkey

Tel: +90 312 267 54 30
Fax : +90 312 267 54 31
info@hepergroup.com
www.heperlighting.com

VEGA S WALL

Installation&Maintenance Instructions
Montaj&Bakım Kılavuzu

REV 0/15/12/2021

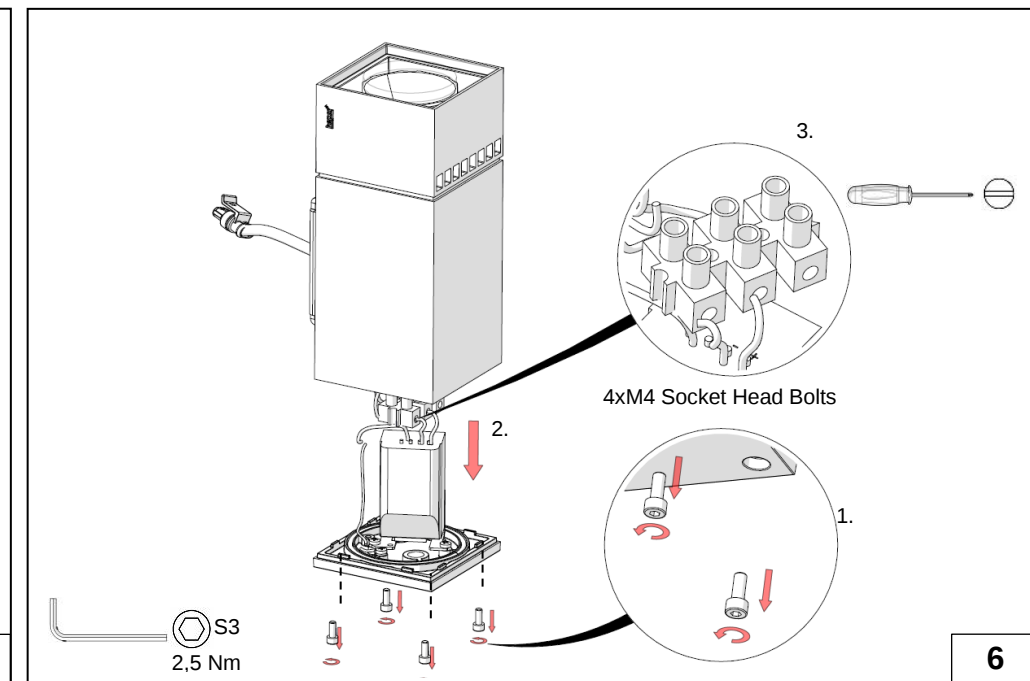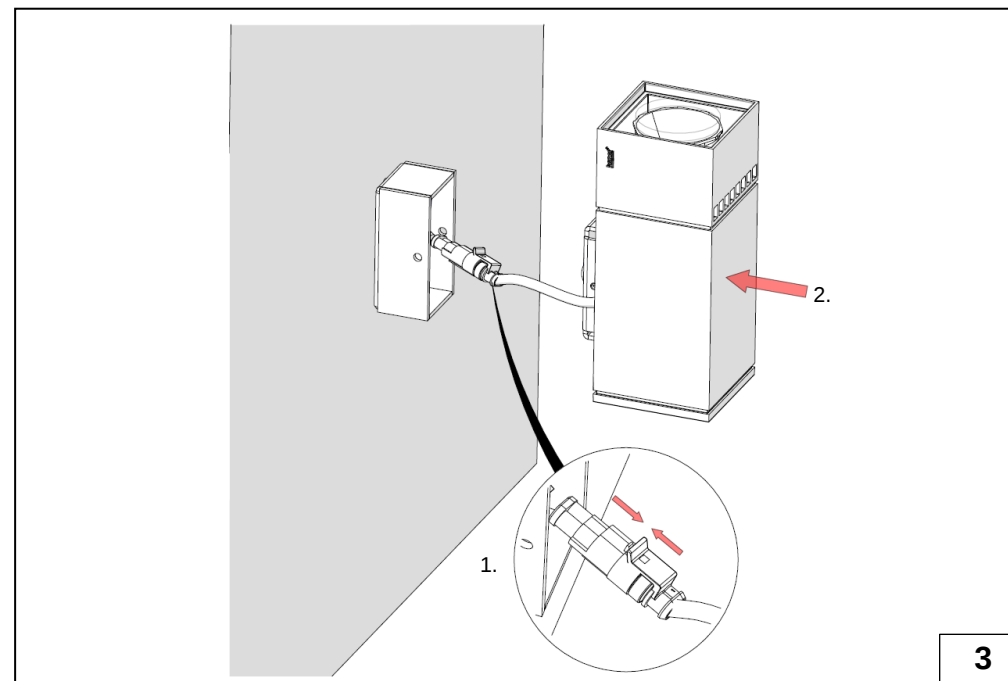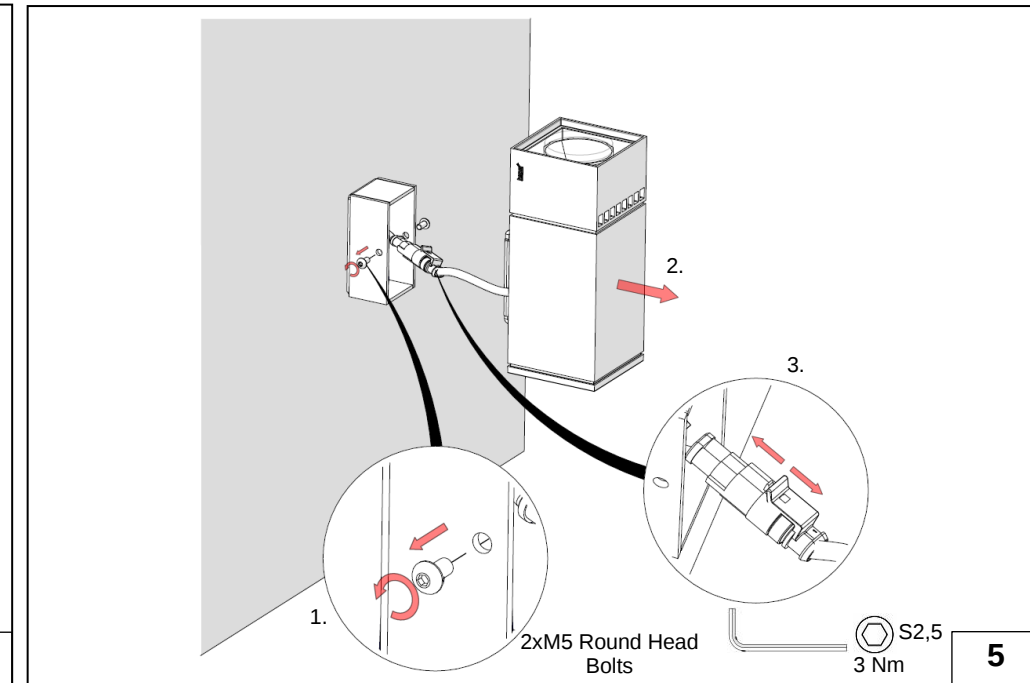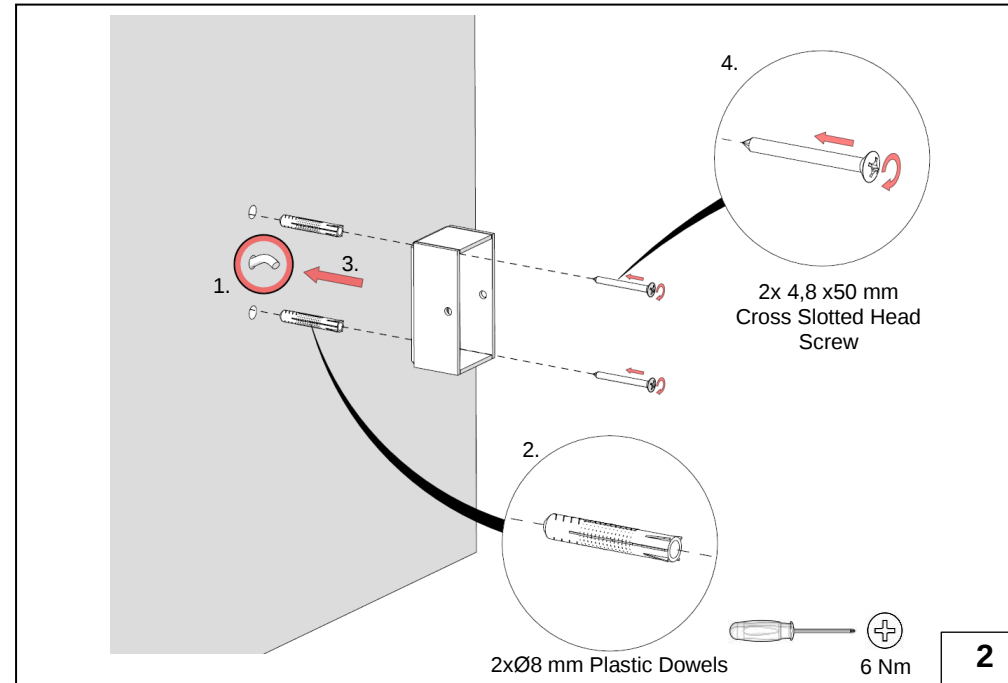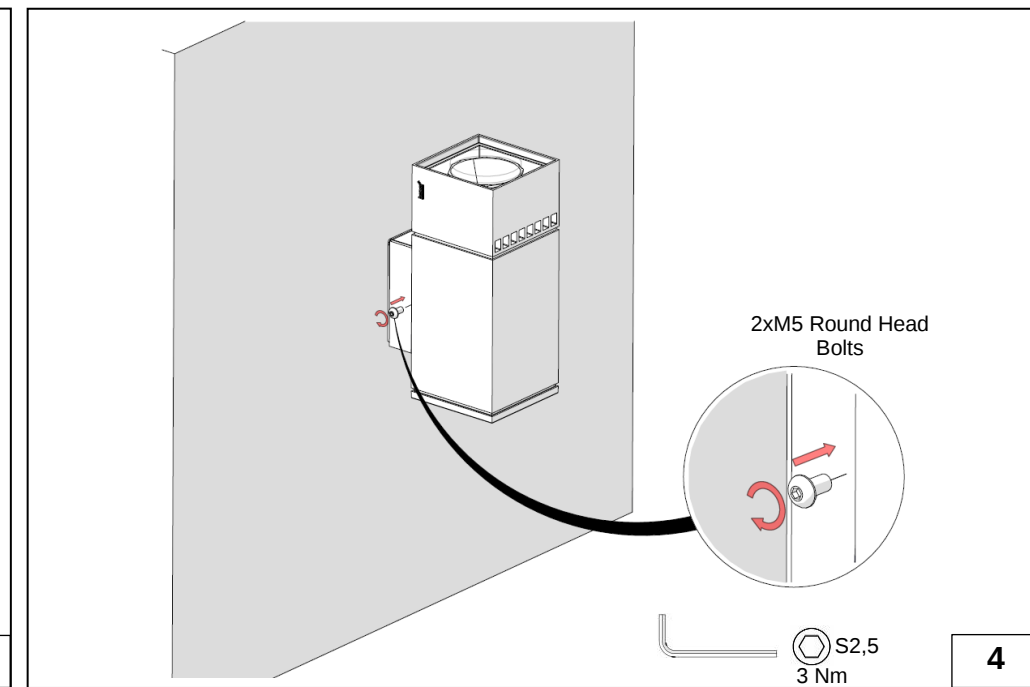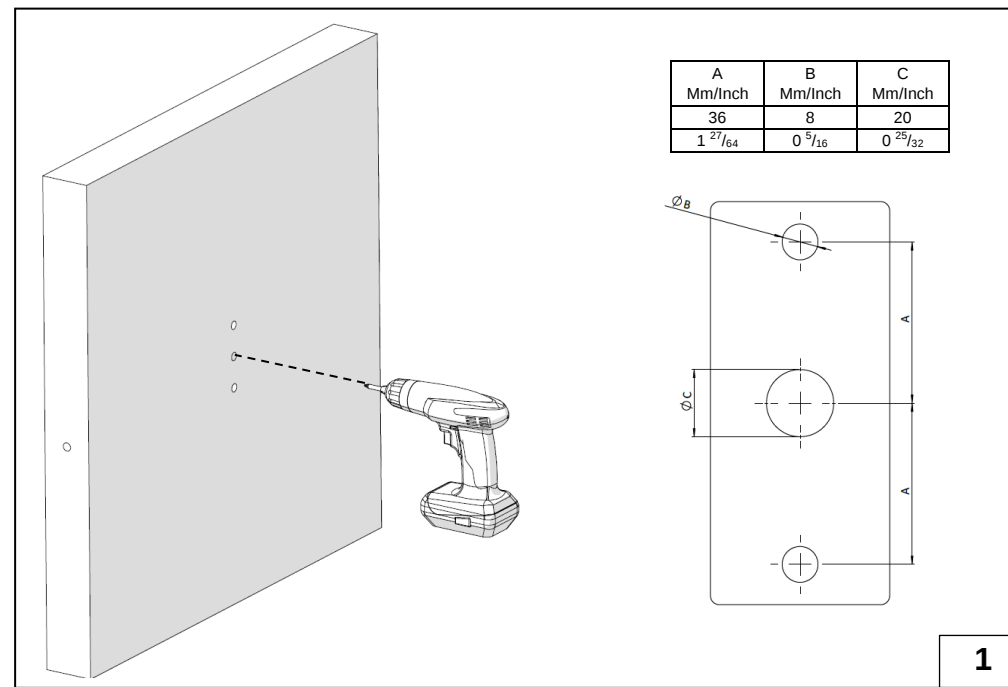

MONTAJ TALİMATLARI

Ürününün, duvara yuva açmadan montajını yapmak için;

1. Ürünün duvara montajını sağlayacak delikler ve kablo deliği delinir.
Not: Kullanılması gereken delik şablon ölçüleri resimde verilmiştir. Ayrıca şablon gelmemektedir.
2. Duvara bağlantı aparatının montajının yapılması;
2.1. Dış hat elektrik kablosunun ürüne kadar geldiğinden emin olunur.
2.2. Plastik dübeller deliklere çakılır.
Not: Bu işlem sırasında dübeller zarar görmemelidir.
- 2.3. Duvara bağlantı aparatı delikleri hizalayarak duvara yaslanır.
- 2.4. Duvara bağlantı aparatı duvara vidalanır.
3. Ürünün duvara bağlantı aparatına montajının yapılması;
3.1. Duvardan gelen kablo ile üründen çıkan kablo soket yardımıyla birbirine montajlanır.
Not : Kabloların birbirine bağlanmasına yarayan soket ürün ile birlikte gelmemektedir.
Ürüne uygun, minimum IPX4 sertifikalı konnektör kullanılması önerilir.
- 3.2. Ürün, duvara bağlantı aparatı üzerine yerleştirilir.
4. Ürünün gövdeye bağlantısını sağlayan civatalar yerlerine sıkılır. Ürün kullanıma hazırdır.

LED sürücüyü değiştirmek için;

5. Ürünü yerinden sökmek için;
- 5.1. Ürünün duvara bağlantısını sağlayan civatalar yerlerinden sökülür.
Not : LED sürücü değişimi tamamlandıktan sonra ürün yerine oturtulur civatalar yerlerine sıkılır.
- 5.2. Ürün yerinden alınır.
- 5.3. Sürücüye elektrik iletimini sağlayan konnektöre bağlı kablolar sökülür.
6. Sürücünün yerinden çıkarılması;
6.1. Konnektöre bağlı kablolar sökülür.
- 6.2. LED sürücü grubunun gövdeye bağlantısını sağlayan civatalar sökülür.
Not: Kontrol ünitesini yerine takarken civatalar aynı tork ile yerine montajlanır.
7. Sürücünün kapağa bağlantısını sağlayan civatalar sökülür. LED sürücü grubu yerinden alınır.
8. LED sürücünün yerinden alınması;
- 8.1. Sürücünün saca montajını sağlayan bağlantı elemanı sökülerek çıkarılır.
Not 1: LED sürücünün üzerindeki kablolar yerinden çıkarılırken, kabloların ve ürünün zarar görmemesine dikkat edilmelidir, bu işlem hassas bir şekilde yapılmalıdır.
Not 2: Yeni LED sürücü yerine oturtulur.
Not 3: Kabloların yeni LED sürücüye ve konnektöre montajı yapılır.
Not 4: Yapılan işlemler tersine işletilerek ürün kapatılır.

KURULUM VE BAKIM İÇİN UYARILAR

Güvenlik Uyarıları

- Bu armatürdeki ışık kaynağı sadece üretici, üreticinin yetkili servisi ya da kalifiye bir teknisyen tarafından değiştirilebilir.
- Kurulum, bakım ve tamir işlemleri sırasında her zaman güç kapatılmalıdır.
- Eğer kurulumdan sonra başka biri tarafından değişim ya da tamir işlemleri yapılırsa bu üreticiden ziyade bu işlemleri yapan kişi sorumluluğu altındadır.
- Sakatlanma, elektrik çarpması, yangın kazası, düşebilecek parçalardan oluşacak kazalarda ölüm riskini azaltmak için kurulumdan önce bu kılavuza riayet edilmelidir.

Kurulum

- LED ürünleri yüksek kalite elektronik parçalardır. Lütfen kurulum sırasında dikkatli ve yavaş bir şekilde işlemleri tamamlayın.

Önemli




- Güvenli kurulum için önce armatür içindeki haznenin düzgün yerleştirildiğinden emin olun.

Temizlik ve Bakım

- Armatürü düzenli olarak solventsiz malzemeler ile temizleyin. Temizleme sırasında yüksek basınçlı sıvılarla işlem yapmamaya özen gösterin.

LED Modüllerin Değiştirilmesi

- LED modül gösterimi armatürün etiketinde not olarak düşülmüştür.
- Işık rengi ve ışık çıkışı HEPER modüllerine aittir. Başka bir modül kullanıldığında istenilen değerler elde edilemeyebilir. Değişim standart ekipmanlarla yapılabilir.

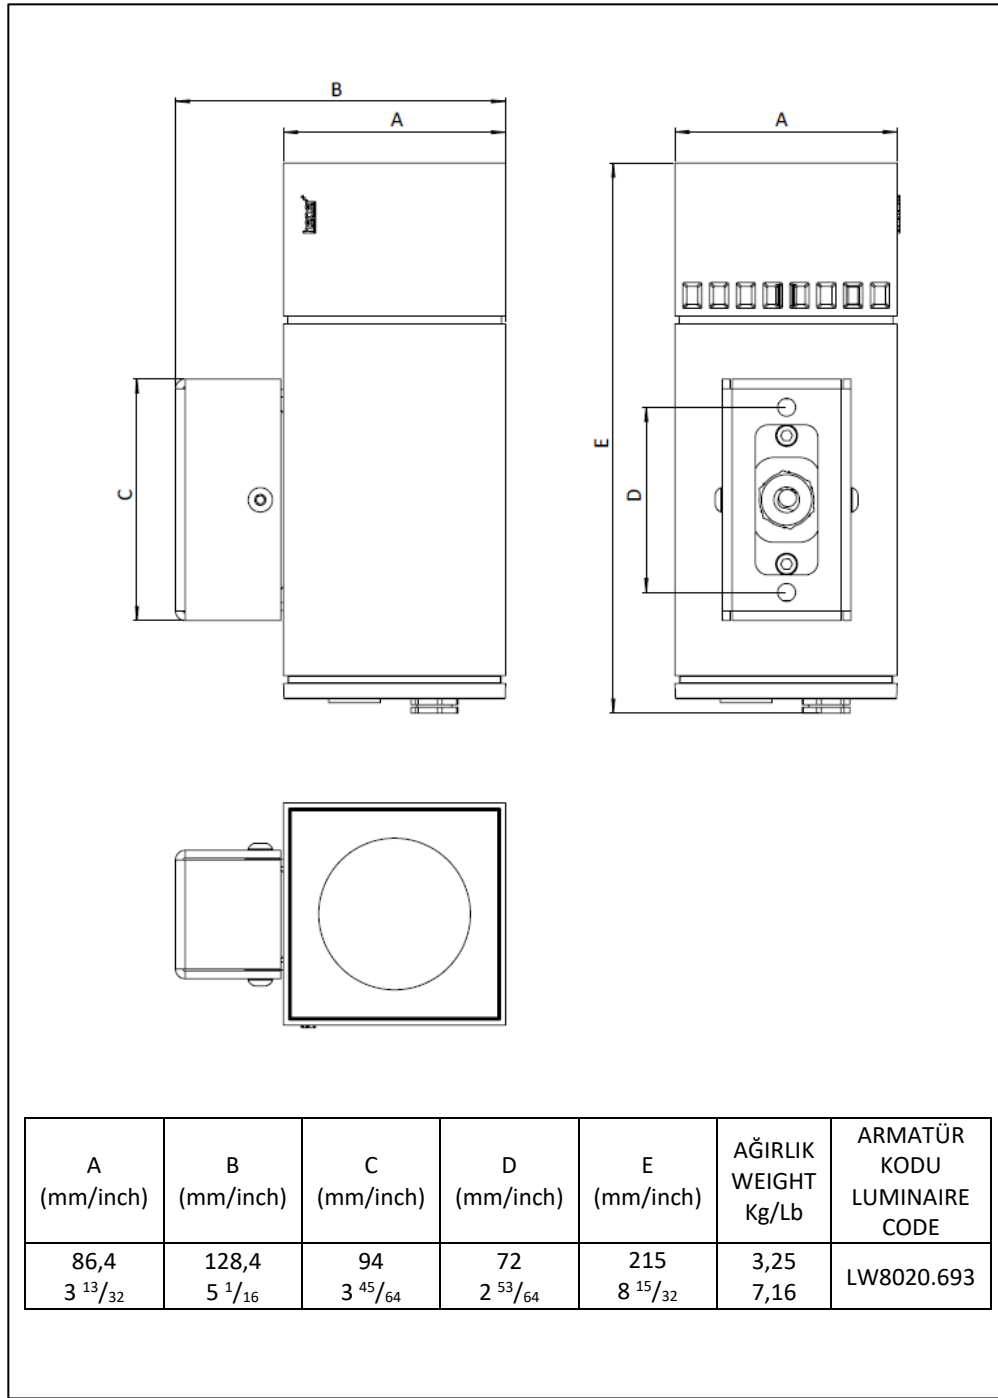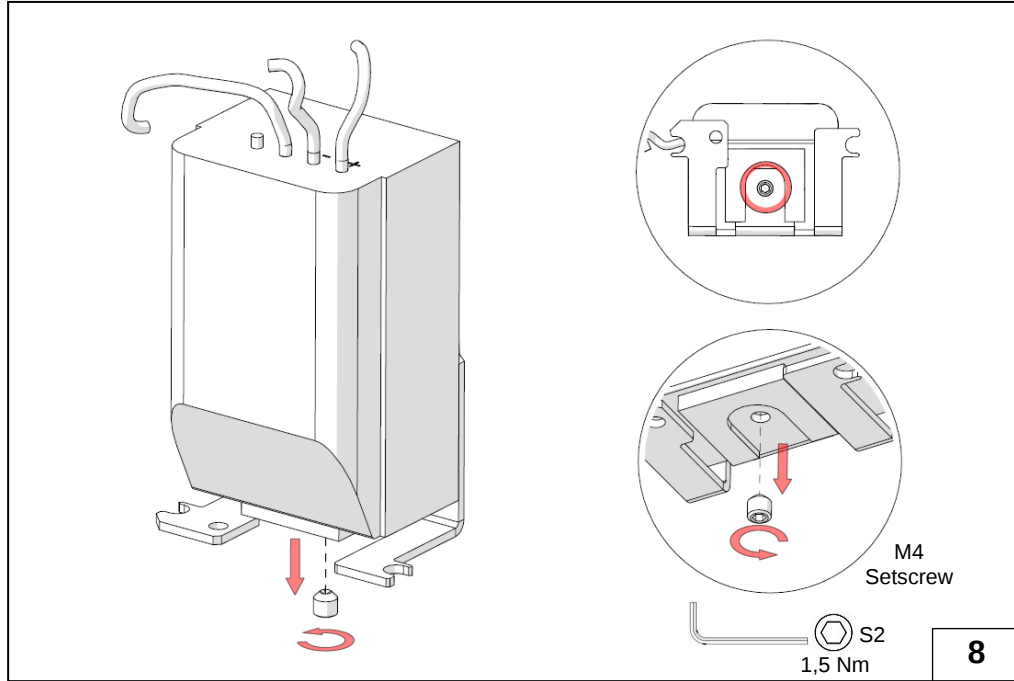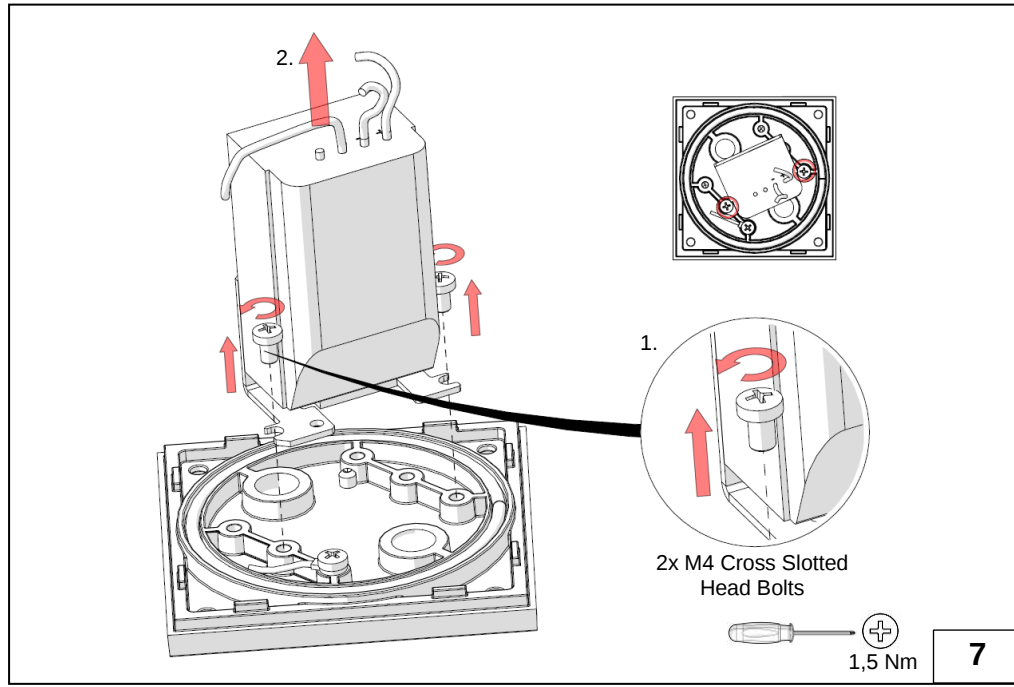

ASSEMBLY INSTRUCTIONS

To mount the product without opening a slot on the wall;

1. Holes and cable hole are drilled to enable the product to be mounted on the wall.
Note: The hole template dimensions to be used are given in the picture. Also, there is no template.
2. Assembling the wall bracket
- 2.1. Make sure that the external line electrical cable comes up to the product.
- 2.2. Plastic dowels are driven into the holes.
Note: Dowels should not be damaged during this process.
- 2.3. The wall bracket aligns the holes and rests against the wall
- 2.4. The wall bracket is screwed
3. Assembling the product to the wall bracket;
- 3.1. The cable coming from the wall and the cable coming out of the product are mounted together with the help of the socket.
Note: The socket for connecting the cables is not supplied with the product. It is recommended to use a minimum IPX4 certified connector suitable for the product.
- 3.2. The product is placed on the wall bracket.
4. The bolts that connect the product to the body are tightened into place. The product is ready to use.

To replace the LED driver;

5. To disassemble the product
- 5.1. The bolts that connect the product to the wall are removed from their places.
Note: After the LED driver replacement is completed, the product is seated and the bolts are tightened.
- 5.2. The product is picked up
- 5.3. The cables connected to the connector providing electrical transmission to the drive are disconnected.
6. Removing the drive;
- 6.1. The cables connected to the connector are disconnected
- 6.2. The bolts that connect the LED driver group to the body are removed.
Note: Placement the controller, the bolts are mounted with the same torque.
8. Removing the LED driver;
- 8.1 The fastener that enables the driver to be mounted on the sheet is removed.
Note 1: When removing the cables on the LED driver, care should be taken not to damage the cables and the product, this process should be done sensitively.
Note 2: The new LED driver snaps into place.
Note 3: The cables are mounted to the new LED driver and connector.
Note 4: The product is closed by reversing the operations.

WARNINGS AND REMARKS FOR
INSTALLATION AND MAINTENANCE

Safety Instructions ⚡

- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person. Always switch off the power prior to installation, maintenance or repair activities.
- The manufacturer is then discharged from liability when damage is caused by improper use or installation.
- If any luminaire is subsequently modified, the persons responsible for the modification shall be considered as manufacturer.
- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts, abrasions and other hazards, please read all warnings and instructions included with the luminaire, on the luminaire's packaging and affixed to the luminaire itself..

Installation ⚡

- LEDs are high-quality electronic components! Please avoid contacting the light output opening of the LED directly during installation or relamping.

IMPORTANT ⚠

- To ensure secure connection, the luminaire housing must be positioned precisely in relation to the mounting plate.

Cleaning And Maintenance

- Clean luminaire regularly with solvent-free cleaners from dirt. Please do not do not clean the luminaire with using high-pressure liquids.

