


DATOS TÉCNICOS TECHNICAL DATA

Referencia de producto	13364
Product reference	13364
Descripción	Clavija empotrable basculante para caravana 3P 16A + Interruptor magnetotérmico 1P+N IP44
Description	Tilting flush-mounting plug 3P 16A + MCB switch IP44 SpeedPRO
Peso neto (Kg)	-
Net weight	-
ETIM 9.0	EC003082
Intensidad	16
IEC-Amperage	16
Polos	3P
Poles	3P
Voltaje	230
Voltage	230
Horas	6h
Hour position	6h
Color	Blanco
Colour	White
Tipo de conexión	-
Connection system	-
Material	Termoplástico
Material	Termoplástico
Material de contacto	-
Contact material	-
Cable admitido	-
Wire flexible	-
Diámetro exterior de cable admisible	-
Permissible cable outside diameter	-
Longitud del cable	-
Cable length	-
Grado de protección	IP44
Protection degree	IP44
Resistencia al impacto	IK07
Impact resistance	IK07
Ensayo de bola	125°C soportes partes activas / 70°C otras partes
Ball pressure test	125°C supports active parts / 70°C other parts
Resistencia al aislamiento	-
Insulating resistance	-
Rigidez dieléctrica (kV)	-
Dielectric Strength (kV)	-
Temperatura de funcionamiento	-25°C / +40°C
Operating temperature	-25°C / +40°C
Temperatura de resistencia	-25°C / 70°C
Temperature resistance	-25°C / 70°C

DATOS LOGÍSTICOS LOGISTICS

Unidad mínima de venta	-
Minimum sales unit	-
EAN Unitario	-
EAN Unit	-
Cantidad estuche	-
Quantity inner box	-
EAN Estuche	-
EAN Inner box	-
Cantidad caja	-
Quantity master box	-
EAN Caja	-
EAN Master box	-
Partida arancelaria	-
HS code	-

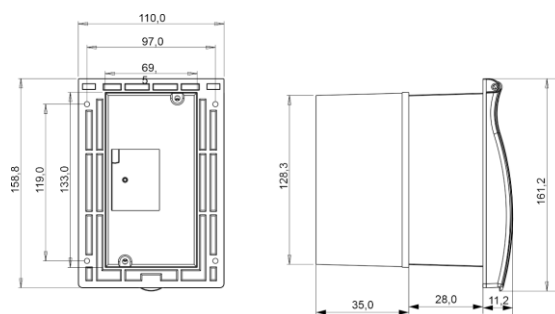

Dimensiones en mm / Dimensions in mm

NORMATIVAS Y CERTIFICACIONES APPLIED AND CERTIFICATIONS

Normativa	IEC 60309-1, IEC 60309-2
Applied	IEC 60309-1, IEC 60309-2
Directiva baja tensión	Low Voltage Directive 2014/35/UE
Low Voltage Directive	Low Voltage Directive 2014/35/UE
Directiva Rohs	RoHS 2011/65/UE and modifications
Rohs Directive	RoHS 2011/65/UE and modifications
Certificado de producto	-
Product certificate	-

