


DATOS TÉCNICOS TECHNICAL DATA

Referencia de producto	23012
Product reference	23012
Descripción	Mirilla de maniobra 13 módulos IP66/67
Description	Operation viewing window 13 modules IP66/67 SpeedPRO
Peso neto (Kg)	0.198
Net weight	0.198
ETIM 9.0	EC002287
Intensidad	-
IEC-Amperage	-
Polos	-
Poles	-
Voltaje	-
Voltage	-
Horas	-
Hour position	-
Color	Gris
Colour	Grey
Tipo de conexión	-
Connection sistem	-
Material	PC
Material	PC
Material de contacto	-
Contact material	-
Cable admitido	-
Wire flexible	-
Diámetro exterior de cable admisible	-
Permissible cable outside diameter	-
Longitud del cable	-
Cable length	-
Grado de protección	IP66/67
Protection degree	IP66/67
Resistencia al impacto	IK08
Impact resistance	IK08
Ensayo de bola	80°C
Ball pressure test	80°C
Resistencia al aislamiento	>10MΩ
Insulating resistance	>10MΩ
Rigidez dieléctrica (kV)	2.5
Dielectric Strenght (kV)	2.5
Temperatura de funcionamiento	-25°C/ 40°C
Operating temperature	-25°C/ 40°C
Temperatura de resistencia	-
Temperature resistance	-

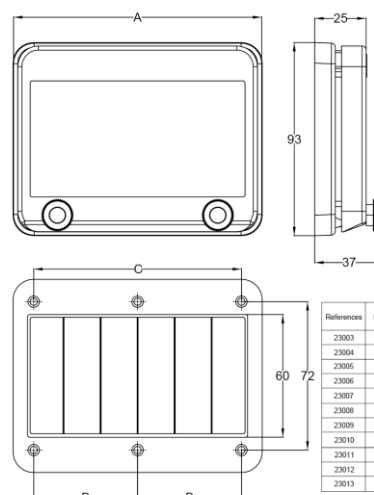

References	Modules	Dimensions		
		A	B	C
23003	2	49	27	32
23004	4	85	65	72
23005	5	103	41.5	90
23006	6	121	50.5	108
23007	7	139	59.5	126
23008	8	157	68.5	144
23009	9	175	77.5	162
23010	10	193	86.5	180
23011	12	229	104.5	215
23012	13	247	113.5	234
23013	18	367	159	324

Dimensiones en mm / Dimensions in mm

DATOS LOGÍSTICOS LOGISTICS

Unidad mínima de venta	10
Minimum sales unit	10
EAN Unitario	8429760277491
EAN Unit	8429760277491
Cantidad estuche	10
Quantity inner box	10
EAN Estuche	8429760287490
EAN Inner box	8429760287490
Cantidad caja	-
Quantity master box	-
EAN Caja	-
EAN Master box	-
Partida arancelaria	85381000
HS code	85381000

NORMATIVAS Y CERTIFICACIONES APPLIED AND CERTIFICATIONS

Normativa	IEC/EN 61439-1, IEC/EN 61439-3
Applied	IEC/EN 61439-1, IEC/EN 61439-3
Directiva baja tensión	Low Voltage Directive 2014/35/UE
Low Voltage Directive	Low Voltage Directive 2014/35/UE
Directiva Rohs	-
Rohs Directive	-
Certificado de producto	-
Product certificate	-

