


DATOS TÉCNICOS TECHNICAL DATA

Referencia de producto	24284
Product reference	24284
Descripción	Base empotrar salida recta 3P+T 125A 230V IP67 SpeedPRO
Description	Straight panel socket 3P+T 125A IP67 SpeedPRO
Peso neto (Kg)	0.89
Net weight	0.89
ETIM 9.0	EC001317
Intensidad	125
IEC-Amperage	125
Polos	3P+T
Poles	3P+T
Voltaje	200-250
Voltage	200-250
Horas	9h
Hour position	9h
Color	Azul
Colour	Blue
Tipo de conexión	Conexión por tornillo
Connection system	Screw connection
Material	ABS+PA6
Material	ABS+PA6
Material de contacto	Latón
Contact material	Brass
Cable admitido	16-50mm²
Wire flexible	16-50mm ²
Diámetro exterior de cable admisible	-
Permissible cable outside diameter	-
Longitud del cable	-
Cable length	-
Grado de protección	IP67
Protection degree	IP67
Resistencia al impacto	IK08
Impact resistance	IK08
Ensayo de bola	125°C soportes partes activas / 70°C otras partes
Ball pressure test	125°C housings active parts / 70°C other parts
Resistencia al aislamiento	>10MΩ@500Vdc
Insulating resistance	>10MΩ@500Vdc
Rigidez dieléctrica (kV)	2.5
Dielectric Strength (kV)	2.5
Temperatura de funcionamiento	-25°C/ 40°C
Operating temperature	-25°C/ 40°C
Temperatura de resistencia	-25°C/ 70°C
Temperature resistance	-25°C/ 70°C

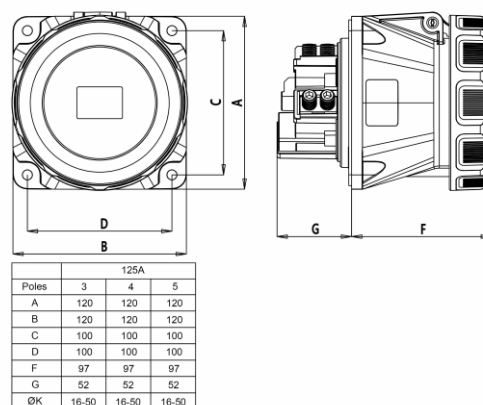

Dimensiones en mm / Dimensions in mm

DATOS LOGÍSTICOS LOGISTICS

Unidad mínima de venta	2
Minimum sales unit	2
EAN Unitario	8429760833451
EAN Unit	8429760833451
Cantidad estuche	2
Quantity inner box	2
EAN Estuche	18429760833458
EAN Inner box	18429760833458
Cantidad caja	2
Quantity master box	2
EAN Caja	-
EAN Master box	-
Partida arancelaria	85366990
HS code	85366990

NORMATIVAS Y CERTIFICACIONES APPLIED AND CERTIFICATIONS

Normativa	IEC/EN 60309-1, IEC/EN 60309-2
Applied	IEC/EN 60309-1, IEC/EN 60309-2
Directiva baja tensión	Low Voltage Directive 2014/35/UE
Low Voltage Directive	Low Voltage Directive 2014/35/UE
Directiva Rohs	RoHS 2011/65/UE and modifications
Rohs Directive	RoHS 2011/65/UE and modifications
Certificado de producto	-
Product certificate	-

