


DATOS TÉCNICOS TECHNICAL DATA

Referencia de producto	24297
Product reference	24297
Descripción	Base superficie 3P+N+T 125A 230V IP67 SpeedPRO
Description	Wall-mounted socket 3P+N+E 125A IP67 SpeedPRO
Peso neto (Kg)	2.09
Net weight	2.09
ETIM 9.0	EC001321
Intensidad	125
IEC-Amperage	125
Polos	3P+N+T
Poles	3P+N+T
Voltaje	120/208-144/250
Voltage	120/208-144/250
Horas	9h
Hour position	9h
Color	Azul
Colour	Blue
Tipo de conexión	Conexión por tornillo
Connection sistem	Screw connection
Material	ABS+PA6
Material	ABS+PA6
Material de contacto	Latón
Contact material	Brass
Cable admitido	16-50mm²
Wire flexible	16-50mm ²
Diámetro exterior de cable admisible	--
Permissible cable outside diameter	--
Longitud del cable	-
Cable length	-
Grado de protección	IP67
Protection degree	IP67
Resistencia al impacto	IK08
Impact resistance	IK08
Ensayo de bola	125°C soportes partes activas / 70°C otras partes
Ball pressure test	125°C housings active parts / 70°C other parts
Resistencia al aislamiento	>10MΩ@500Vdc
Insulating resistance	>10MΩ@500Vdc
Rigidez dieléctrica (kV)	2.5
Dielectric Strenght (kV)	2.5
Temperatura de funcionamiento	-25°C/ 40°C
Operating temperature	-25°C/ 40°C
Temperatura de resistencia	-25°C/ 70°C
Temperature resistance	-25°C/ 70°C

DATOS LOGÍSTICOS LOGISTICS

Unidad mínima de venta	1
Minimum sales unit	1
EAN Unitario	8429760248576
EAN Unit	8429760248576
Cantidad estuche	1
Quantity inner box	1
EAN Estuche	8429760258575
EAN Inner box	8429760258575
Cantidad caja	-
Quantity master box	-
EAN Caja	8429760268574
EAN Master box	8429760268574
Partida arancelaria	85366990
HS code	85366990

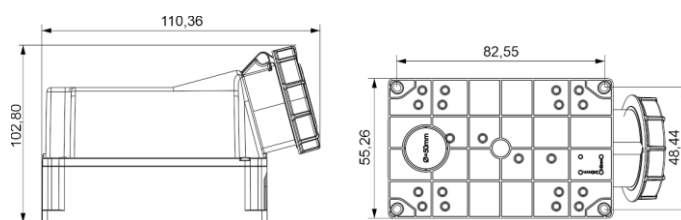

NORMATIVAS Y CERTIFICACIONES APPLIED AND CERTIFICATIONS

Normativa	IEC/EN 60309-1, IEC/EN 60309-2
Applied	IEC/EN 60309-1, IEC/EN 60309-2
Directiva baja tensión	Low Voltage Directive 2014/35/UE
Low Voltage Directive	Low Voltage Directive 2014/35/UE
Directiva Rohs	RoHS 2011/65/UE and modifications
Rohs Directive	RoHS 2011/65/UE and modifications
Certificado de producto	-
Product certificate	-

