
Fig. 90 — CODO 90° LATÓN H/H
ELBOW 90° BRASS F/F

ROSCA ISO 7-1
ISO 7-1 THREAD



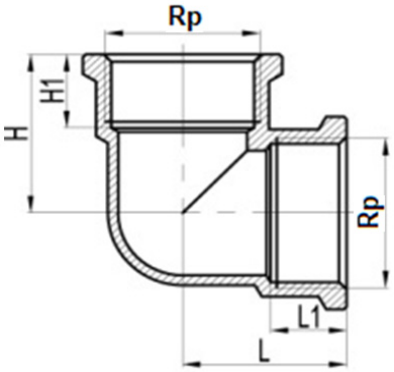

INFORMACIÓN TÉCNICA - *TECHNICAL INFORMATION*

DN	COD.	DIMENSIONES - *DIMENSIONS*					Peso aprox. *Weight aprox.* (g)
		L (mm)	L1 (mm)	H (mm)	H1 (mm)	Rp	
1/2"	LS090703	27,5	16	27,5	16	Rp 1/2	74
3/4"	LS090704	32	16,5	32	16,5	Rp 3/4	129
1"	LS090705	39	19,5	39	19,5	Rp 1	233
1 1/4"	LS090706	45	22	45	22	Rp 1 1/4	317
1 1/2"	LS090707	47	22	47	22	Rp 1 1/2	426
2"	LS090708	58	26	58	26	Rp 2	762

CARACTERÍSTICAS BÁSICAS
- Cuerpo en latón CW617N-DW según UNE-EN 12165.
- Método de fabricación: Forja en caliente.
- Rosca de unión según UNE-EN ISO 7-1.
- Accesorios conforme a la norma UNE-EN 1254-4.
- Rango de temperatura de trabajo: -20 a 130 ˚C.
- Presión máxima de ejercicio: PN 25.

APLICACIONES GENERALES
- Agua sanitaria fría y caliente.

INSTRUCCIONES DE MONTAJE
- Aplicar en la rosca teflón o sellante similar para obtener una mayor estanqueidad en la unión.
- Evitar el exceso del material añadido para prevenir posibles roturas por el excesivo apriete.
- Colocar el accesorio en la instalación, con atención de no exceder el apriete de la pieza.

Observaciones:
Dada la complejidad, variedad y gran cantidad de especificaciones particulares de cada instalación, en conjunción con la existencia de diversos factores que pueden afectar a las condiciones de trabajo y naturaleza del producto, es responsabilidad del usuario final realizar los ensayos necesarios para garantizar el correcto funcionamiento del producto en cada aplicación concreta.
La instalación del producto deberá realizarse y mantenerse siguiendo códigos de buena práctica y/o estándares existentes.

BASIC FEATURES
- *Body in brass CW617N-DW according to EN 12165.*
- *Production method: Hot forging.*
- *Threads according to EN ISO 7-1.*
- *Fittings comply with EN 1254-4 standard.*
- *Working temperature range: -20 to 130 ˚C.*
- *Maximal working pressure: PN 25.*

GENERAL APPLICATIONS
- *Cold and hot sanitary water.*

ASSEMBLING INSTRUCTIONS
- *Place over the fitting PTFE or similar sealant in order to obtain a better thightness on the coupling.*
- *Avoid any surplus of sealant in order to prevent possible breakings caused by excessive clamping.*
- *Connect the fitting with the installation. Pay attention to not exceeding in fitting clamping.*

Remarks:
Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.
Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota : Debido al constante desarrollo de nuestros productos, los datos suministrados pueden ser alterados sin previo aviso.
Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.0-07.22

ATUSA
Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusagroup.com
www.atusagroup.com