
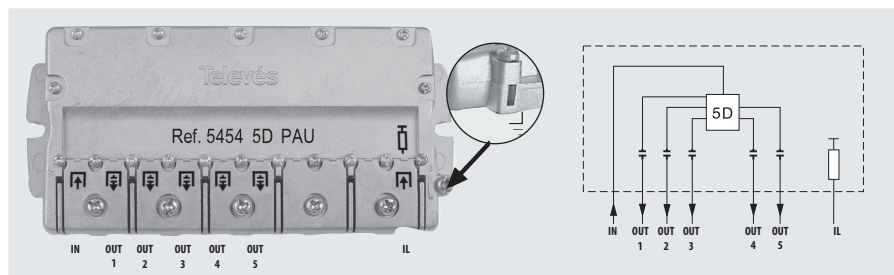
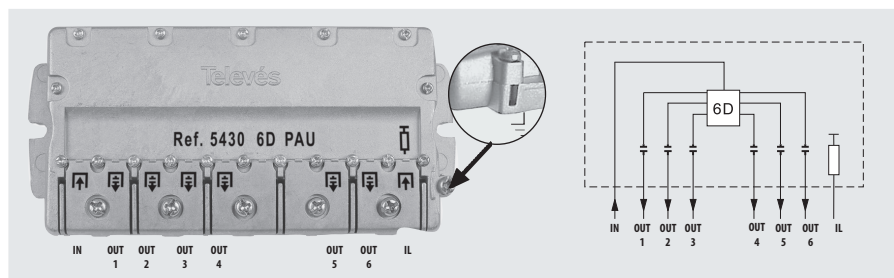


Repartidores EMC / Repartidores EMC / Répartiteurs EMC / Splitters EMC / Parttitori / Делители EMC / Verteiler EMC Easy-F / موزع EMC

Refs. / Мод. / المرجع 5454, 5430, 5433

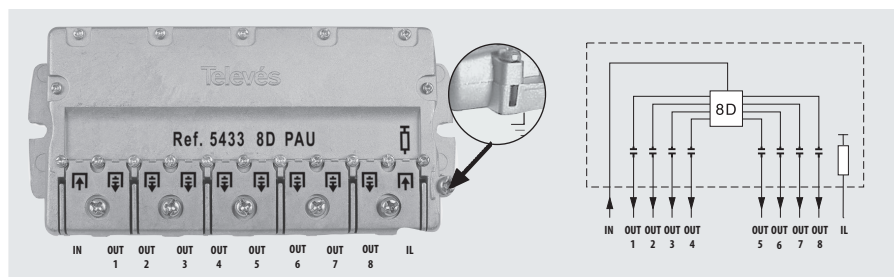

GAMA DE PRODUCTOS / GAMA DE PRODUTOS
GAMME DE PRODUITS / PRODUCT RANGE
GAMMA PRODOTTI / Гамма продуктов
PRODUKTPALETTE / مجموعة من المنتجات

5454	5D
5430	6D
5433	8D


Accesorio / Acessórios / Accessoire / Accessory /
Accessori / Аксессуары / Zubehör / مستلزمات اضافية







75 ohm

Ref. / Мод. 408701
Art. Nr. SR75-DC


خصائص تقنية	Caract. técnicas	Caract. técnicas	Spécific. techniques	Technical specific.	Caracteristic. tecniche	Технические характеристики	Technische Daten	5430			MHz
								5454	5430	5433	
هامش التردد	Margem freq.	Margem freq.	Marge fréq.	Freq. range	Gamma di frequenza	Диап. частот	Frequenzbereich	5 - 2400 MHz			
تخفيف إشارة مدخل مخرج ١, ٢	Aten. IN - OUT 1, 2	Aten. IN - OUT 1, 2	Attén. IN - OUT 1, 2	Atten. IN - OUT 1, 2	Attenuazione IN - OUT 1, 2	Аттенуация Вх1 - Вых1, 2	Verteil- dämpfung IN-OUT1, 2	5-47 MHz			< 15
								47-862 MHz			< 14
								950-2400 MHz			14 ± 1
تخفيف إشارة مدخل مخرج ٣, ٤	Aten. IN - OUT 3, 4	Aten. IN - OUT 3, 4	Attén. IN - OUT 3, 4	Atten. IN - OUT 3, 4	Attenuazione IN - OUT 3, 4	Аттенуация Вх1 - Вых3, 4	Verteil- dämpfung IN-OUT3, 4	5-47 MHz			< 15
								47-862 MHz			< 13
								950-2400 MHz			12 ± 1
تخفيف إشارة مدخل مخرج ٥	Aten. IN - OUT 5, 6	Aten. IN - OUT 5, 6	Attén. IN - OUT 5, 6	Atten. IN - OUT 5, 6	Attenuazione IN - OUT 5, 6	Аттенуация Вх1 - Вых5, 6	Verteil- dämpfung IN-OUT5, 6	5-47 MHz			< 15
								47-862 MHz			< 16
								950-2400 MHz			13 ± 1
تخفيف إشارة مدخل مخرج ٧, ٨	Aten. IN - OUT 7, 8	Aten. IN - OUT 7, 8	Attén. IN - OUT 7, 8	Atten. IN - OUT 7, 8	Attenuazione IN - OUT 7, 8	Аттенуация Вх1 - Вых7, 8	Verteil- dämpfung IN-OUT7, 8	5-47 MHz			< 15
								47-862 MHz			< 20
								950-2400 MHz			15 ± 2
الرفض بين المخارج	Rechazo entre salidas	Rejeição entre saídas	Réject entre sorties	Rejection between outputs	Separazione tra uscite	Режекция между отводами	Entkopplung Ausgänge	5-47 MHz			> 30
								47-862 MHz			> 28
								950-2400 MHz			> 28



Anclaje de brida para facilitar el conexionado
 Encaixe da braçadeira para facilitar a ligação
 Fixation de la bride pour simplifier la connexion
 Cable clamp joint for easy connection.
 Esempio di preparazione di spelatura del cabo per un
 semplice collegamento
 Фиксация зажима для удобства соединения
 Easy-F Anschluss um die Montage zu erleichtern
 مثبت قامطات الخراطمي لتسهيل الضم

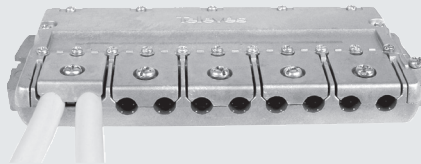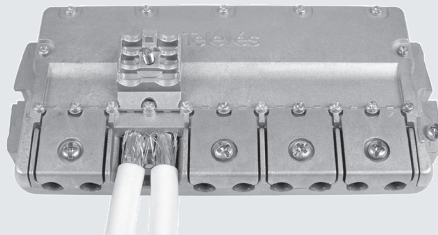

Mismo pelado para cables de una misma brida
 Mesmo descarnado para cabos da mesma braçadeira
 Même découpe du câble par bride
 Same stripping for cables with the same clamp
 Stessa speladura per cavi di collegamenti uguali
 Одинаковая зачистка кабелей одного зажима
 Kabel abisolieren und einstecken
 نفس تجريد الكابلات لنفس قامطة الخرطوم

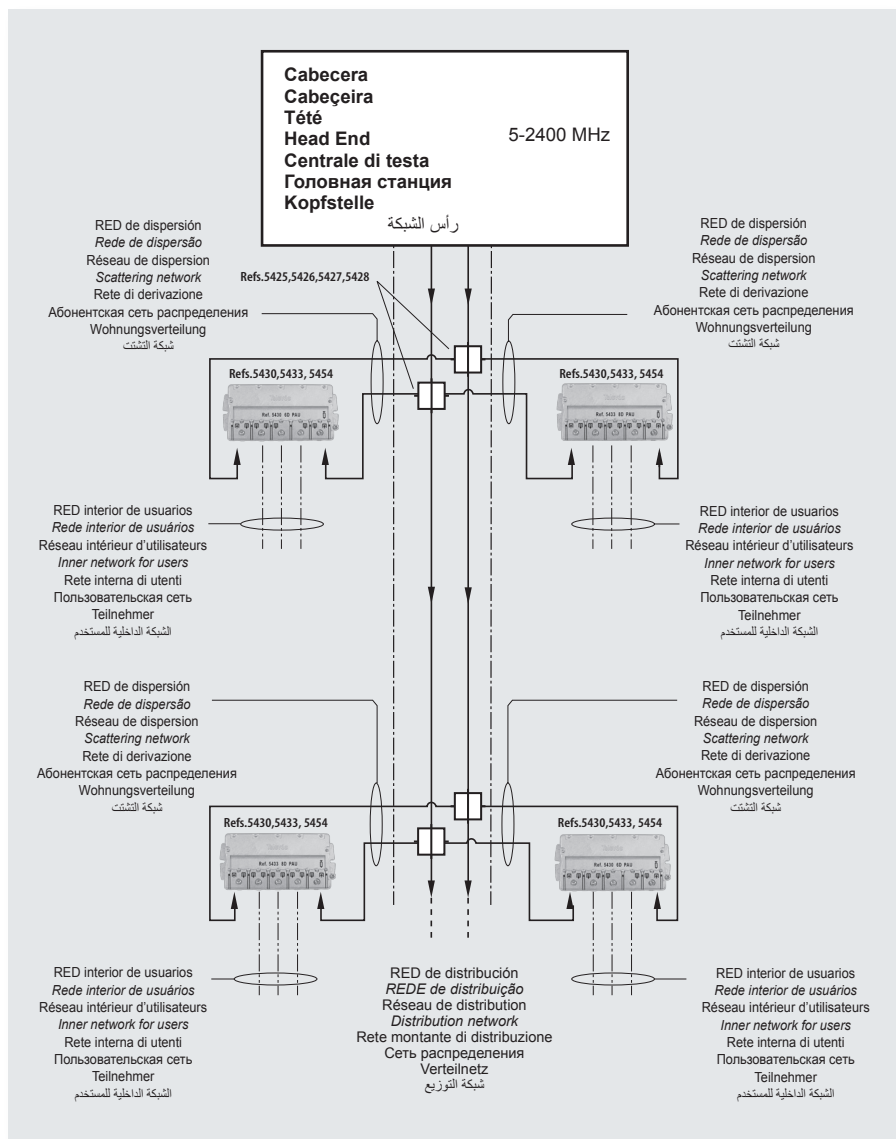

DECLARACIÓN DE CONFORMIDAD ■ DECLARATION OF CONFORMITY ■ DECLARAÇÃO DE CONFORMIDADE ■ DECLARATION DE CONFORMITE ■ DICHIARAZIONE DI CONFORMITÀ ■ DEKLARACJA ZGODNOŚCI ■ KONFORMITÄTSERKLÄRUNG ■ ΠΙΣΤΟΠΟΙΗΤΙΚΟ ΣΥΜΜΟΡΦΩΣΗΣ ■ FÖRSÄKRAN OM ÖVERENSSTÄMMELSE ■ ДЕКЛАРАЦИЯ СООТВЕТСТВИЯ ■ بيان المطابقة ► [https:// doc.televes.com](https://doc.televes.com)

Televis S.A. Rúa B. de Conxo, 17 - 15706 Santiago de Compostela - Spain Tel.: +34 981 522200 www.televes.com



01030152-002