


Contar	Descripción
1	<p>COMFORT 15-14 BX TA</p>  <p>Advierta! la foto puede diferir del actual producto</p> <p>Código: 97916749</p> <p>The Grundfos Comfort BA PM and BXA PM pumps are designed for recirculation of domestic hot water in single-family and two-family houses securing hot water instantly to all faucets.</p> <p>The pumps have a corrosion-resistant pump housing suitable for drinking water and are powered by a single-phase, high-efficiency ECM with permanent-magnet rotor.</p> <p>The AUTOADAPT function incorporates an event log that learns the scheme of demand for hot water in the domestic hot-water system.</p> <p>Via the event log, the pump predicts when to start circulating hot water ensuring hot water is instantly available at all use points.</p> <p>Should the consumption pattern change, for example during holidays, the pump will recognise the standstill after 24 hours and automatically adapts to holiday mode.</p> <p>When returning from holiday, the pump will automatically resume the same consumption pattern as before the holiday.</p> <p>The unique AUTOADAPT feature is saving up to 48 % heat energy and 97 % motor energy compared with a standard pump in continuous operation.</p> <p>Additionally, the pump can be set to temperature control mode and continuous operation 100 % for commissioning of the pump or 24 hours instant hot water.</p> <p>The pumps are equipped with a flushing and disinfection function which automatically circulates water to protect against bacterial growth in the pipes.</p> <p>COMFORT BXA PM has a built-in isolating valve and a non-return valve (fitting). This ensures that maintenance can be carried out without draining the system. The non-return valve also prevents reversed flow during operation.</p>

Descripción	Valor
Información general:	
Producto::	COMFORT 15-14 BX TA
Código::	97916749
Número EAN::	5710626363742
Técnico:	
N.º de velocidad:	1
Caudal nominal:	0.33 m³/h
Altura nominal:	0.78 m
Altura máxima:	14 dm
Clase TF:	95
Homologaciones:	CE,VDE,EAC,WEEE
Materiales:	
Cuerpo hidráulico:	Latón
Carcasa de la bomba:	CuZn39Pb3, MS58
Impulsor:	Composite
	PPO-GF20/Stainless steel
Instalación:	
Temperatura ambiente mínima:	0 °C
Presión de trabajo máxima:	10 bar
Normativa de conexión de tubería:	ISO 228-1
Tipo de conexión:	G
Tamaño de la conexión:	1 inch
Presión nominal para la conexión:	PN 10
Longitud puerto a puerto:	140 mm
Líquido:	
Líquido bombeado:	Agua
Rango de temperatura del líquido:	2 .. 95 °C
Temperatura del líquido durante el funcionamiento:	60 °C
Densidad:	983.2 kg/m³
Datos eléctricos:	
Potencia de entrada máx.:	7 W
Frecuencia de red:	50 / 60 Hz
Tensión nominal:	1 x 230 V
Corriente en velocidad 3:	0.07 A
Grado de protección (IEC 34-5):	IP44
Clase de aislamiento (IEC 85):	F
Protección estándar Ex:	ELECT.
Protec. térmica:	Protección por impedancia
Paneles control:	
El modo de funcionamiento incluye:	Temperature
Otros:	
Peso neto:	1.18 kg
Peso bruto:	1.28 kg
Volumen de transporte:	0.003 m³
VVS danés n.º:	380635120
RSK sueco n.º:	5803087
NRF noruego n.º:	9042117
País de origen:	DE
Tarifa personalizada n.º:	84137030



Líquido bombeado = Agua
Temperatura del líquido durante el funcionamiento = 60 °C
Densidad = 983.2 kg/m³

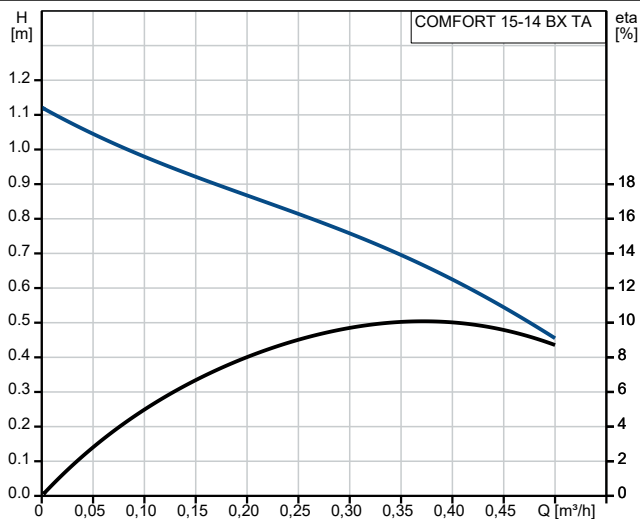