



LED PANEL VLPS 1200 x 300 mm 40W

# Product	VLPS12030BB	VLPS12030BF
WATT (W)	40W	40W
LUMEN (Lm)	3280Lm	3280Lm
Color temperature (K)	6000K	4000K
Voltage (V)	220~240V	220~240V
Life hours (H)	40000	40000
Protection level	IP20	IP20
Angle (°)	110°	110°
Frequency (Hz)	50/60	50/60
Dimmable	NO	NO
Dimensions (WxLxH)	295x1195x32mm	295x1195x32mm
Material color	White	White

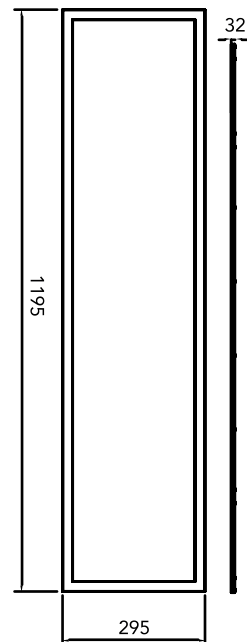

INSTALLATION:

1. Turn off the power.
2. Connect the commercial power with the input of the matched power supply, make sure that no copperware is exposed.
3. Connect matched power supply and panel light together through the plug.
4. Fix the panel light and power supply at suitable place.
5. Turn on the power.

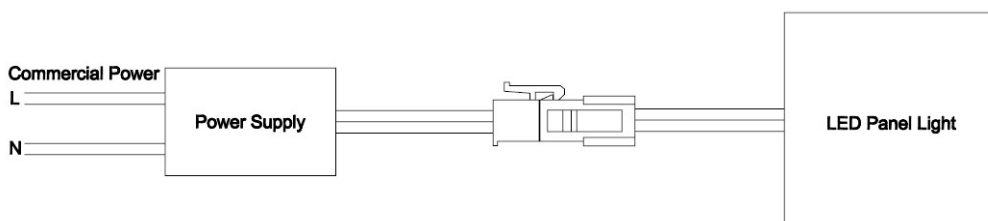

NOTES


The panel should be driven by appointed power supply.

Working out of temp. range -20°C ~ +40°C will shorten the lifetime of luminaires.

Installation and maintenance must be done by professionals. Do not open the luminaire without consent of the manufacturer. The manufacturer reserves the right to refuse warrant service if the product shows signs of damage due to incorrect maintenance or installation.


LED PANEL VLPS 1200 x 300 mm 40W

# Producto	VLPS12030BB	VLPS12030BF
WATT (W)	40W	40W
LUMEN (Lm)	3280Lm	3280Lm
Temperatura Color (K)	6000K	4000K
Voltaje (V)	220~240V	220~240V
Horas de vida (H)	40000	40000
Nivel de Protección	IP20	IP20
Ángulo (°)	110°	110°
Frecuencia (Hz)	50/60	50/60
Dimable	NO	NO
Dimensiones (WxLxH)	295x1195x32mm	295x1195x32mm
Color material	Blanco	Blanco

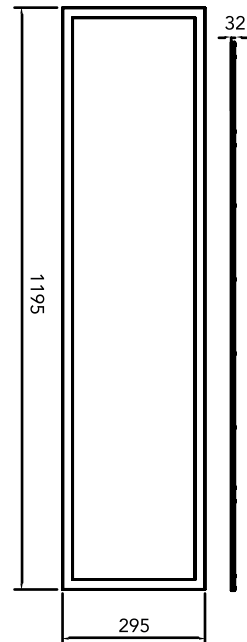

INSTALACIÓN:

1. Apague la corriente antes de comenzar la instalación.
2. Conecte la corriente a la terminal del driver. Asegúrese de que no queden expuestos los cables.
3. Conecte el driver con el conector del panel
4. Instale el Panel en el techo.
5. Tras revisar que el montaje es correcto puede volver a encender la corriente.

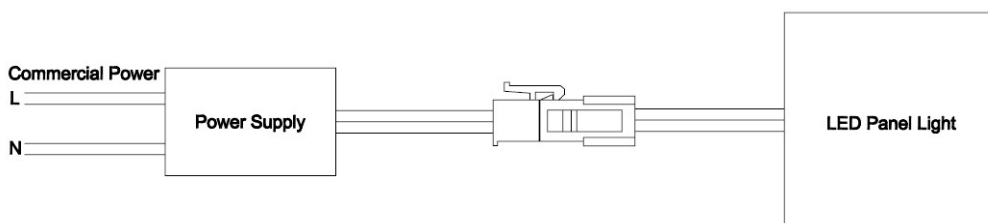

NOTAS

Utilice el driver que viene incluido con este panel.

Utilizar la luminaria fuera del rango de temperatura de -20°C ~ +40°C acorta la vida útil del producto.

Solicite la ayuda de un profesional para la instalación de este producto. No abrir la luminaria sin supervisión o consentimiento del fabricante.

En caso de daños por mala instalación o mal mantenimiento la empresa se reserva el derecho a rechazar el servicio de garantía.