


Pipe Clip – Galvanised Steel

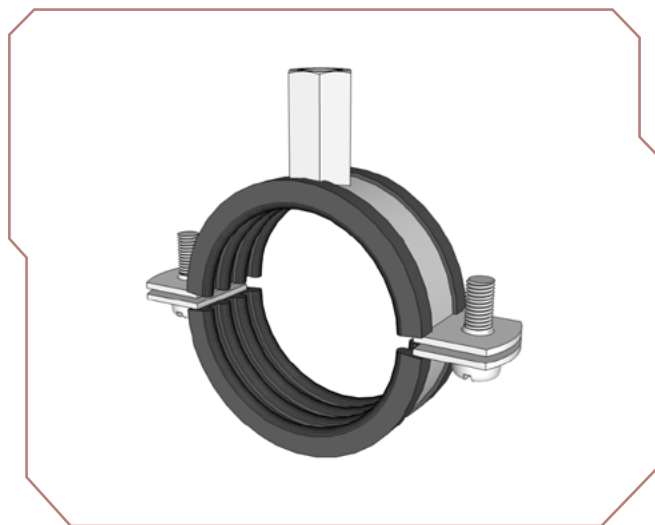

Applications

- ✓ Acoustic and vibration-isolating support of copper, PVC (DWV), PPVC (pressure) and HDPE pipework
- ✓ Sound-dampened pipe mounting where DIN 4109 noise reduction is required
- ✓ Plumbing, drainage and hydraulic pipe support
- ✓ HVAC and mechanical services pipe support

Description

Dacromet galvanised acoustic pipe clips with an EPDM lining that cuts noise by up to 15 dB (DIN 4109) and dampens vibration. The range covers 17 sizes with clamping ranges from 12 mm to 163 mm, suiting copper, PVC (DWV), PPVC (pressure) and HDPE pipe. The lining is rated from -50 to +110 °C (45 ±5 shore, DIN 4102 class B2). Each clip is supplied pre-assembled with a combination M8/M10 boss and pan head screw, and carries embossed sizing for identification.

Features

- ✓ Dacromet galvanised for high corrosion resistance
- ✓ EPDM lining reduces noise up to 15 dB (DIN 4109)
- ✓ EPDM lining reduces vibration
- ✓ EPDM lining can withstand temperatures between -50 and +110 degrees Celsius
- ✓ EPDM lining hardness of 45 ±5 shore
- ✓ DIN 4102 class B2, "normal flammability"
- ✓ Pre-assembled out of the box
- ✓ Combination pan head screw PH2 / flat / Pozi
- ✓ Combination M8 / M10 hexagonal boss
- ✓ Embossed sizing detail for easy identification

Specification Sheet

Ultramax Code	Copper	PVC (DWV)	PPVC (Pressure)	HDPE	Clamping Range (mm)	Internal Thread	Material (mm)	Insulation (mm)	Load (kN/Kg)	Box Qty	Locking Screw	Min. Torque (Nm)
GCL13	15				12 - 15	M8/M10	20 x 1.5	20 x 3.8	1.2/122	150	M6 x 25	60
GCL19	20				15 - 19	M8/M10	20 x 1.5	20 x 3.8	1.2/122	150	M6 x 25	60
GCL25	25		20	25	25 - 30	M8/M10	20 x 1.5	20 x 3.8	1.2/122	100	M6 x 25	60
GCL28	32		25	32	32 - 37	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
GCL32	40				36 - 39	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
GCL40		40	32	40	40 - 45	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
GCL50			40		48 - 53	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
GCL58		50		56	54 - 58	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
GCL64	65			63	60 - 64	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
GCL73		65			68 - 73	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
GCL80	80		65	75	75 - 80	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 35	60
GCL90		80			82 - 86	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 35	60
GCL103	100				95 - 103	M8/M10	23 x 2.0	23 x 3.8	1.5/152	50	M6 x 35	70
GCL110		100	100	110	108 - 114	M8/M10	23 x 2.0	23 x 3.8	1.5/152	50	M6 x 35	70
GCL127	125			125	121 - 127	M8/M10	25 x 2.0	25 x 4.5	1.5/152	25	M8 x 25	70
GCL152	150				148 - 152	M8/M10	25 x 2.0	25 x 4.5	1.5/152	25	M8 x 25	70
GCL160		150	150	160	159 - 163	M8/M10	25 x 2.5	25 x 4.5	2.5/254	20	M8 x 25	70