


Pipe Clip – Zinc Plated

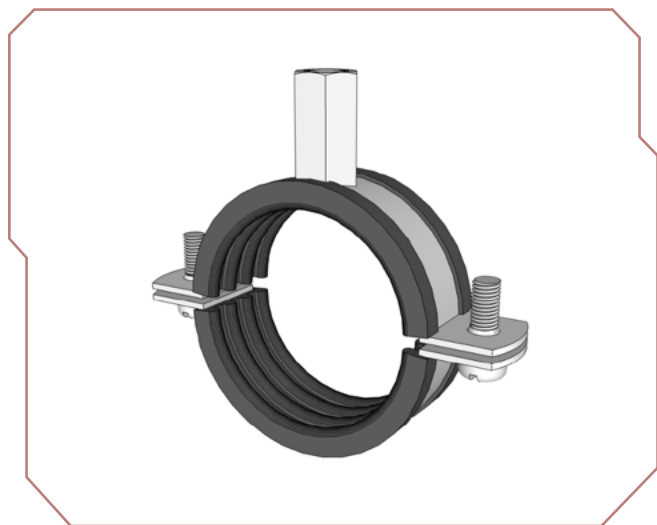

Applications

- ✓ Acoustic and vibration-isolating support of copper, PVC (DWV), PPVC (pressure) and HDPE pipework
- ✓ Sound-dampened pipe mounting where DIN 4109 noise reduction is required
- ✓ Plumbing, drainage and hydraulic pipe support
- ✓ HVAC and mechanical services pipe support

Specification Sheet

Ultramax Code	Copper	PVC (DWV)	PPVC (Pressure)	HDPE	Clamping Range (mm)	Internal Thread	Material (mm)	Insulation (mm)	Load (kN/Kg)	Box Qty	Locking Screw	Min. Torque (Nm)
FFC15	15				12 - 15	M8/M10	20 x 1.5	20 x 3.8	1.2/122	150	M6 x 25	60
FFC20	20				15 - 19	M8/M10	20 x 1.5	20 x 3.8	1.2/122	150	M6 x 25	60
FFC23			15	20	20 - 24	M8/M10	20 x 1.5	20 x 3.8	1.2/122	100	M6 x 25	60
FFC25	25		20	25	25 - 30	M8/M10	20 x 1.5	20 x 3.8	1.2/122	100	M6 x 25	60
FFC32	32		25	32	32 - 37	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
FFC40	40				36 - 39	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
FFC43		40	32	40	40 - 45	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
FFC50			40		48 - 53	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
FFC53	50			50	50 - 56	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
FFC56		50		56	54 - 58	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
FFC63	65			63	60 - 64	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
FFC69		65			68 - 73	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 25	60
FFC76	80		65	75	75 - 80	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 35	60
FFC82		80			82 - 86	M8/M10	20 x 1.5	20 x 3.8	1.2/122	50	M6 x 35	60
FFC102	100				95 - 103	M8/M10	23 x 2.0	23 x 3.8	1.5/152	50	M6 x 35	70
FFC110		100	100	110	108 - 114	M8/M10	23 x 2.0	23 x 3.8	1.5/152	50	M6 x 35	70

Description

Zinc plated (electrogalvanised) acoustic pipe clips with an EPDM lining that cuts noise by up to 15 dB (DIN 4109) and dampens vibration. The range covers 16 sizes with clamping ranges from 12 mm to 200 mm, suiting copper, PVC (DWV), PPVC (pressure) and HDPE pipe. The lining is rated from -50 to +110 °C (45 ±5 shore, DIN 4102 class B2). Each clip is supplied pre-assembled with a combination M8/M10 boss and pan head screw, and carries embossed sizing for identification.

Features

- ✓ Electrogalvanized for corrosion resistance (plating thickness 6-10 microns)
- ✓ EPDM lining reduces noise up to 15 dB (DIN 4109)
- ✓ EPDM lining reduces vibration
- ✓ EPDM lining can withstand temperatures between -50 and +110 degrees Celsius
- ✓ EPDM lining hardness of 45 ±5 shore
- ✓ DIN 4102 class B2, "normal flammability"
- ✓ Pre-assembled out of the box
- ✓ Combination pan head screw PH2 / flat / Pozi
- ✓ Combination M8 / M10 hexagonal boss
- ✓ Embossed sizing detail for easy identification