


## Motion sensor - PIR - 1-10V - Up to 6 m (A90191-L3)

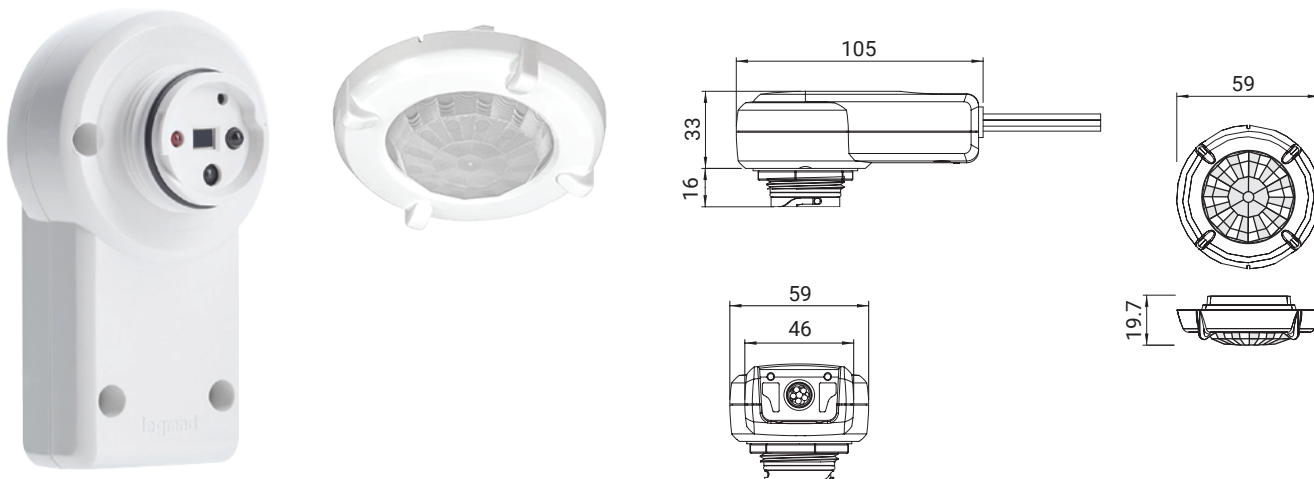

### Specifications

Power supply	100-347VAC or 208/230/480VAC
Maximum load @-40°C ~ +75°C	@120V 0-800W @230-240W 0-300W @277V 0-1200W @347/480V Ballast, LED driver
Dim control output	0-10v, max. 50mA sinking current
Detection radius/angle	Max. Coverage 12.1m diameter from 6m High / 360°
Mounting height	Max. 6m
Temperature	-40°C ~ +75°C



### Accessories



Remote controller for  
the motion sensor - 1-10V  
(A90191)

**A90791**

### Sensor Coverage

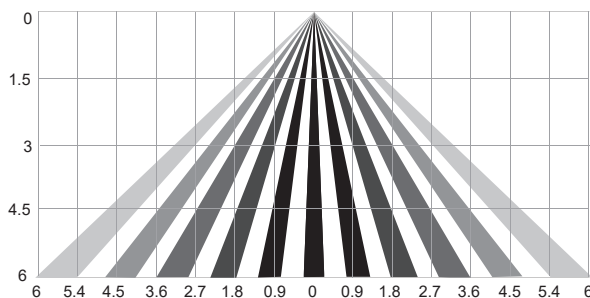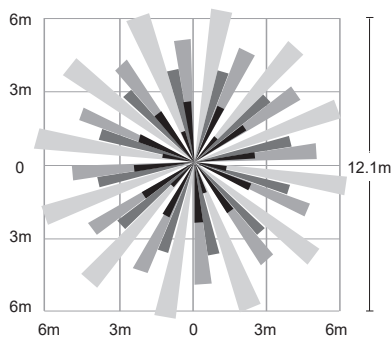

### Functional Capabilities and Settings

Sensitivity	100%	90%	80%	70%	60%	
Hold on time	30 sec	1 min	5 min	15 min	30 min	
Daylight threshold	10 fc	50 fc	100 fc	150 fc	200 fc	250 fc
Stand by dimming level	50%	40%	30%	20%	10%	0%
Stand by time	None cut off	1 min	5 min	15 min	30 min	1-5 hours
Sensitivity	Low	Med	Max			

#### Factory Default Settings

NOTE: You can contact the factory in order to get different factory settings or you can order the "Remote controller" to change the settings later.