




## For Installation of NEON EDGE Continuous LED Solution IP67 (24VDC)

### Product drawing (dimensions)

IP67



### NEON EDGE | ELECTRICAL AND PHYSICAL INSTALLTION GUIDE

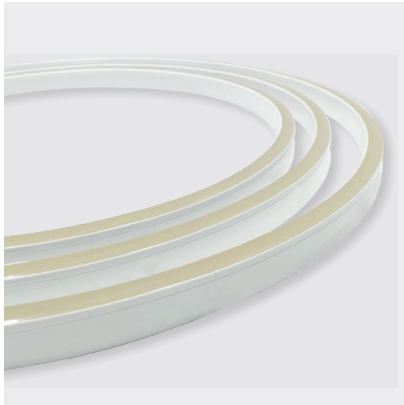

COLOUR	NEON SERIES	VARIANT CODE
WARM WHITE 3000K +/- 175K	NEON 13	ITNO1230001067-ED-HB
NATURAL WHITE 4000K +/- 275K	NEON 13	ITNO1240001067-ED-HB
2500 - 5000K TUNEABLE WHITE	NEON 14	ITNO12TUW01067-ED-HB
RGB	NEON 15	ITNO12RGB01067-ED-HB
RGBW	NEON 16	ITNO15RGBW0567-ED-HB
RGB DYNAMIC	NEON 20	ITNO12RGB01067-ED-HB

ELECTRICAL & OPTICAL DATA VARIANCE +/- 10%  
SOLD BY THE METRE  
IES FILES AVAILABLE

Please note drawings are an installation guide only. Each LED tape application may have variable factors. Cable size may need to be specified to limit the voltage drop throughout the circuit.

Actual product characteristics may vary. Ligman Lighting reserves the right to improve, modify or update the product designs without prior notice.

**ALWAYS UNCOIL BEFORE USE**

- LIGMAN standard products are supplied with the control gear 24VDC  
The control gear for other voltages and frequencies is available upon request, please consult us for more details.
- LIGMAN luminaires are designed to conform IEC 60598 2-2 standard.

Technical amendments and modifications techniques reserved.


## Ligman Lighting

THAILAND  
LIGMAN Lighting Co.,Ltd.  
17/2 Moo 4, Monthong, Bang Nam Prio,  
24150 Chachoengsao - Thailand  
info@ligman.com


## BENDING PARAMETERS




NEON EDGE CAN BE CURVED AS SHOWN BELOW

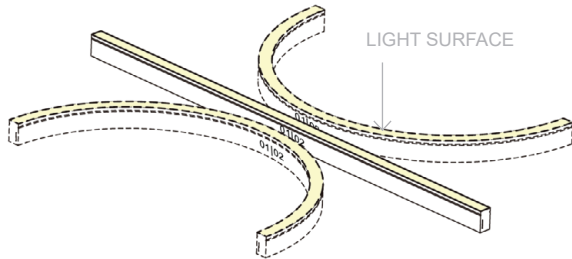


DO NOT TWIST THE LIGHT OR BEND AGAINST THE LIGHT SURFACE

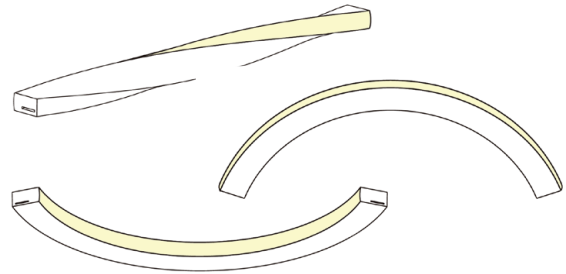

- Avoid bending LED Neon within the first unit (*units are clearly marked with dashed lines on the sides of the product*)

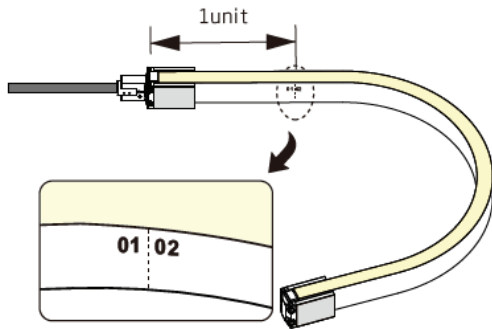


- LED Neon can be bent up to the defined "minimum bend radius" (60mm for Neon Edge)

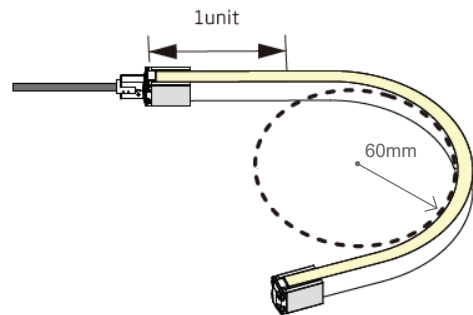


## WIRING DIAGRAMS

### WHITE

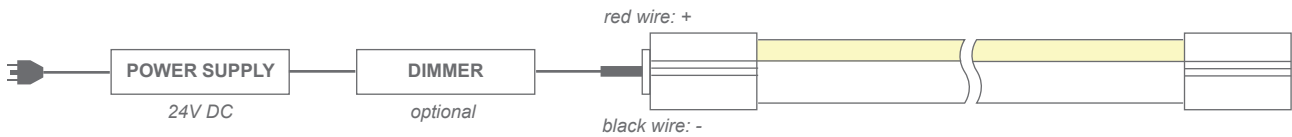


MAX. RUN PER POWER FEED: 10m using one feed, 20m using two feeds

### TUNEABLE WHITE

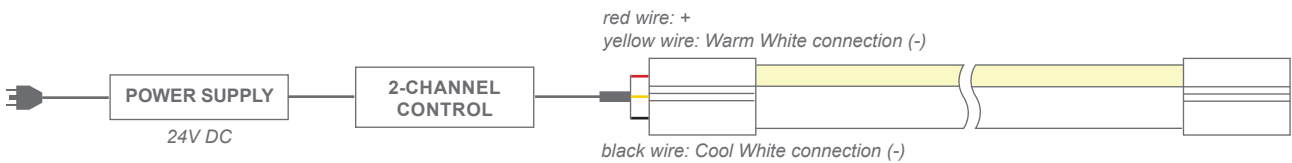


MAX. RUN PER POWER FEED: 10m using one feed, 20m using two feeds

### RGB

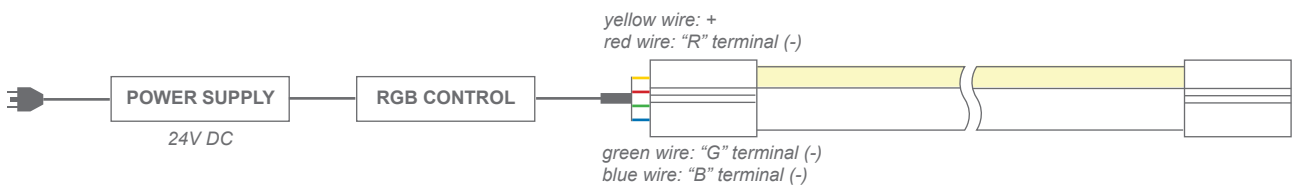


MAX. RUN PER POWER FEED: 7m using one feed, 14m using two feeds (Static full loading) or, 10m using one feed, 20m using two feeds (Dynamic operating)

### RGBW

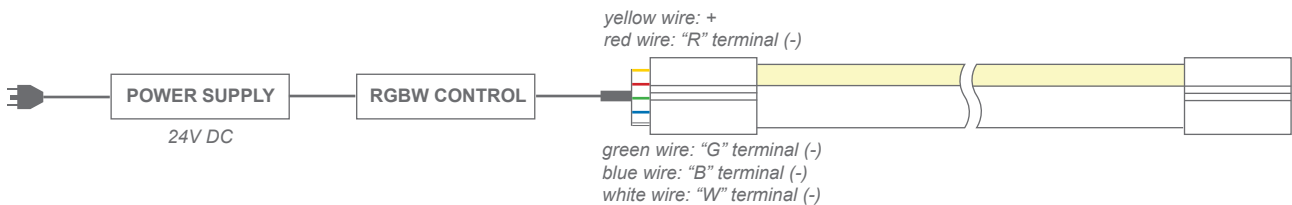

MAX. RUN PER POWER FEED: 5m using one feed, 10m using two feeds

### DYNAMIC RGB 'CHASING'

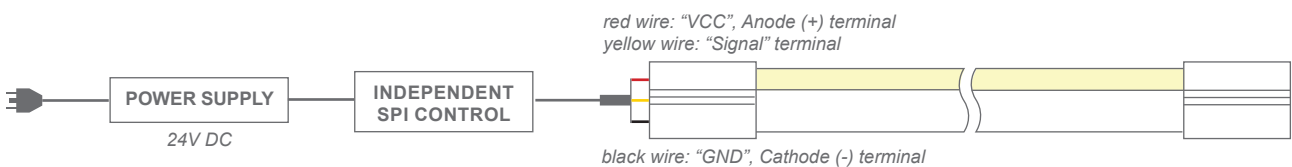

DMX OPTION AVAILABLE

MAX. RUN PER POWER FEED: 10m using one feed, 20m using two feeds (Static full loading) or, 15m using one feed, 30m using two feeds (Dynamic operating)

- LED Neon must always be used in conjunction with a certified Bright Light 24V DC power supply.
- Check the polarity of the connector before inserting the front connector and switching on the mains power.
- To minimise voltage drop and ensure consistent light output, position the power supply near to the power feed end of the LED Neon, and keep the line as short as possible
- Ensure your maximum run per power feed adheres to the guidelines; see specification sheet.
- Ensure to add 20% buffer when selecting a power supply
- Before making any cuts, installation, maintenance, or connection, be sure the mains power is disconnected.
- If essential; cut and connect LED Neon correctly. Any incorrect operation can cause damage.
- All connector joints must be connected correctly to achieve connector IP rating.

## PROFILE INSTALLATION REQUIREMENTS

### ACCESSORY


A80104-001  
SELF-LOCKING ALUMINIUM V2 PROFILE 2m

A80105-001  
SELF-LOCKING ALUMINIUM V2 MOUNTING CLIP 35mm

A80106-001  
PLASTIC PROFILE 2m

A80106-002  
PLASTIC PROFILE 1m


REFER TO  
**MOUNTING ACCESSORIES PDF**  
FOR PROFILE DETAILS  
& DIMENSIONS

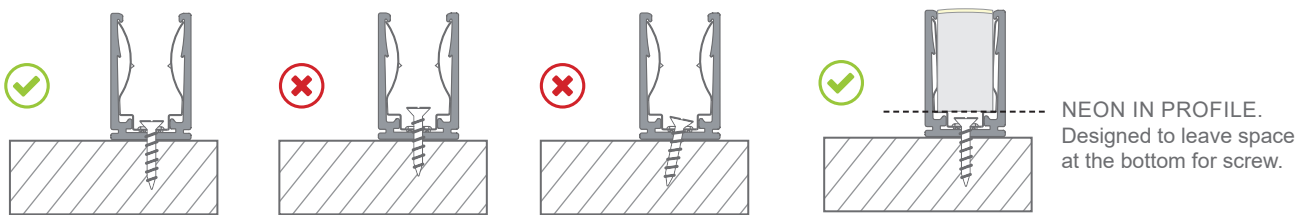

**PROFILE MOUNTING:** Install the screw ensuring head is flush or lower than the profile groove and into surface straight

### ACCESSORY


A80107-001  
CURVE STAINLESS STEEL PROFILE 900MM  
MULTIPLE FIXING LOCATIONS

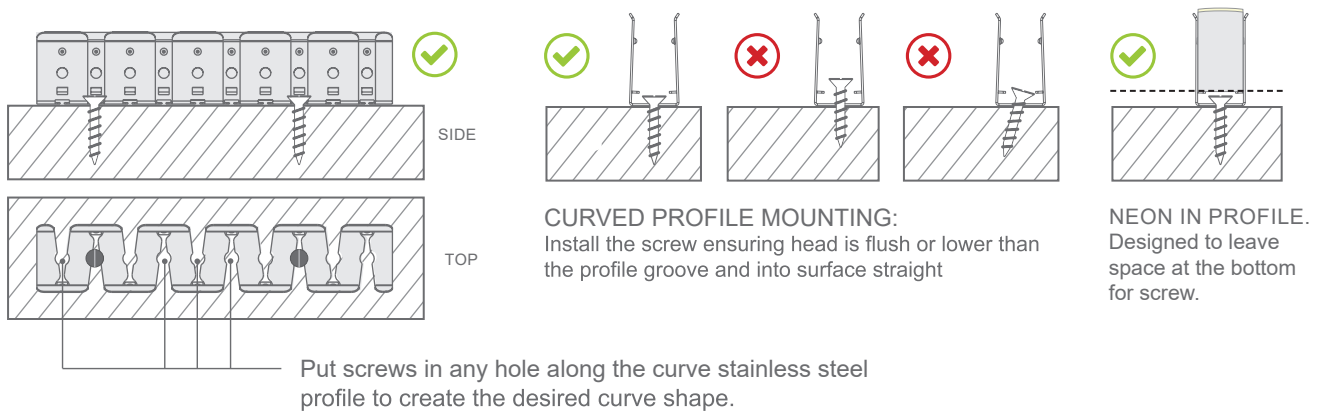

**CURVED PROFILE MOUNTING:**  
Install the screw ensuring head is flush or lower than the profile groove and into surface straight

**NEON IN PROFILE.**  
Designed to leave space at the bottom for screw.

Put screws in any hole along the curve stainless steel profile to create the desired curve shape.

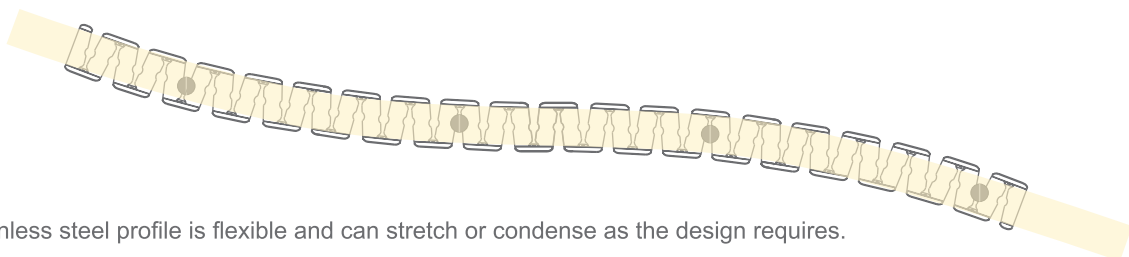


Curve stainless steel profile is flexible and can stretch or condense as the design requires.


## PROFILE INSTALLATION REQUIREMENTS

### >> FOR SLEEVE / SNAP / DUAL INJECTION MOULDING CONNECTORS


- ✔ - Ensure the supply cord is not subject to mechanical stress
- Keep 10–20mm distance between the end of the profile and the end mounting piece

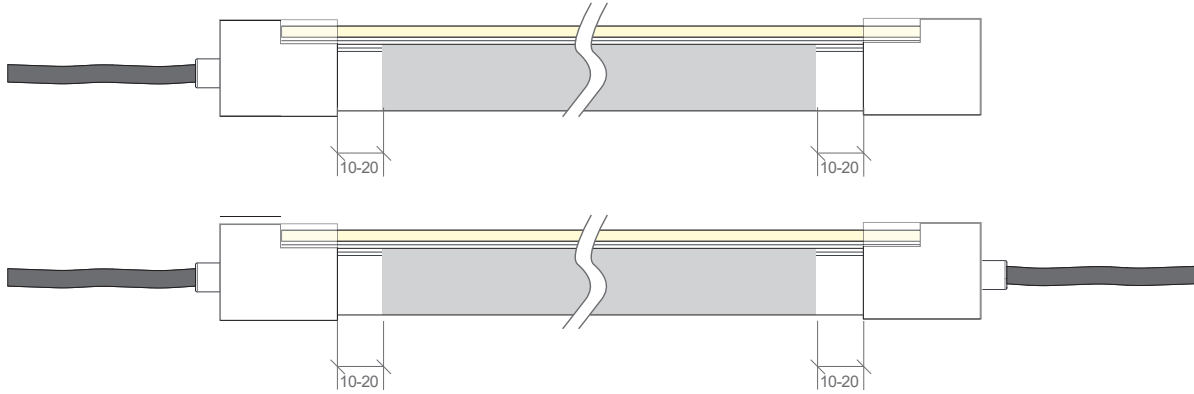


- The bend angle should be less than 15 degrees when installing LED Neon into the profile by hand

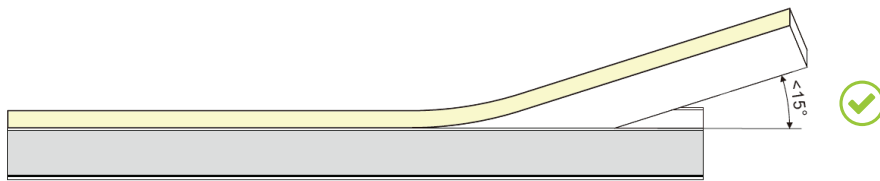


- ✘ - Avoid placing mechanical stress on the front connector cable
- Do not curl or bend the front connector cable with excessive force

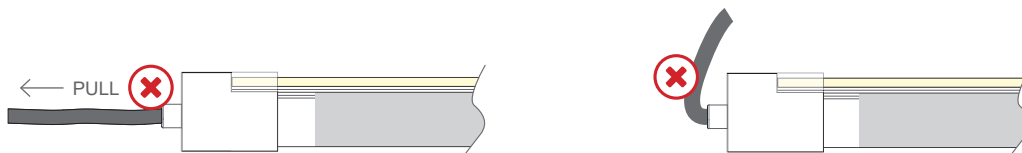

- Avoid installing the profile less than 10mm from the end mounting piece

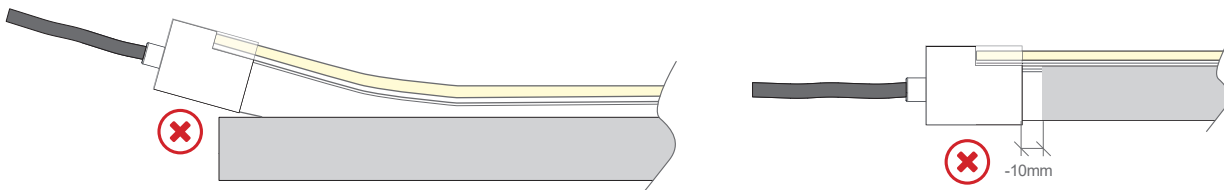


- Install the LED Neon into the profile in one direction, don't let it bow in the middle

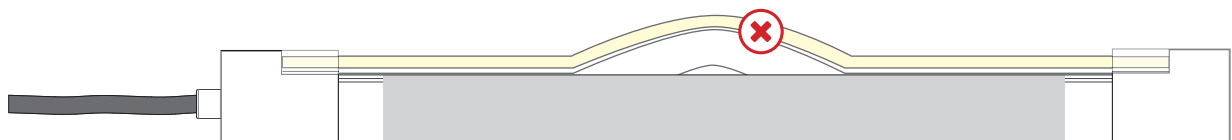


## PROFILE INSTALLATION REQUIREMENTS >> FOR SLIMLINE INJECTION MOULDING CONNECTOR

### TOP END FEED

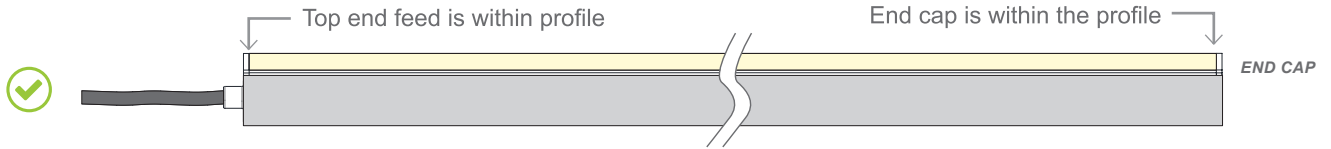


- Top End Feed (Slimline injection moulding only) & end cap are both fitted within the profile


### BOTTOM FEED / SIDE FEED

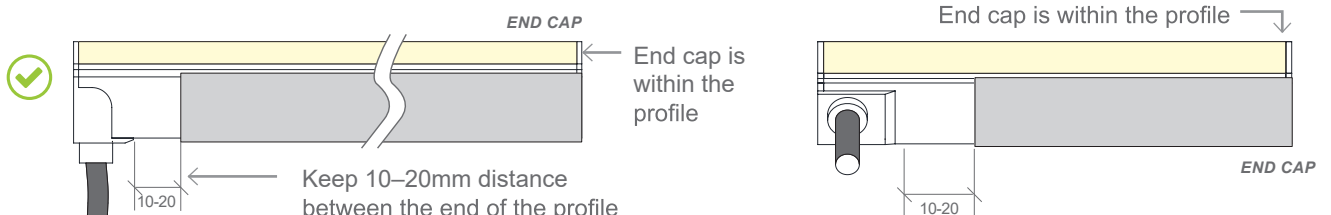


- Bottom feed / side feed are keep outside the profile with 10-20mm space
- End cap is within the profile

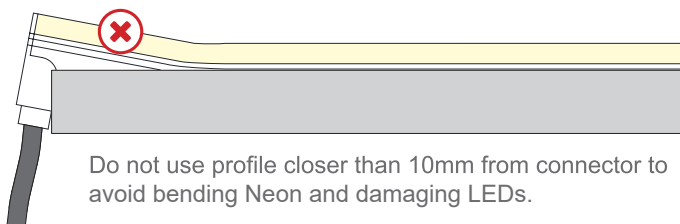

- Avoid placing mechanical stress on the connector cable
- Do not curl or bend the connector cable with excessive force

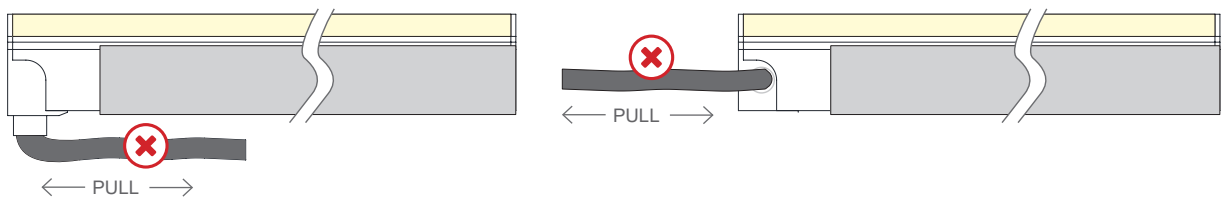

### MIDDLE FEED

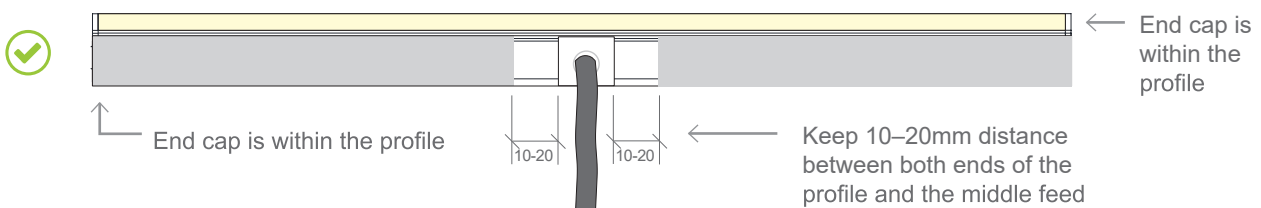

## SNAP CONNECTIONS - IP67

SUITABLE FOR OUTDOOR APPLICATIONS  
 MUST BE FITTED CORRECTLY FOR IP67 RATING  
 FEED CONNECTORS SUPPLIED AS 1M CABLE  
**STANDARD INSTALLATION WITH SINGLE POWER FEED:**  
 FEED 01 + END CAP 02  
**DOUBLE POWER FEED:** FEED 01 + FEED 02



TOP END FEED




END CAP




FLEXIBLE CONNECTOR


	01	02	02	
WHITE	A80083-011	A80083-012		A80085-006
TUNEABLE	A80083-013	A80083-014	A80084-003	A80085-007
RGB	A80083-015	A80083-016		A80085-008
RGB CHASING	A80083-017	A80083-018		A80085-009
RGBW				

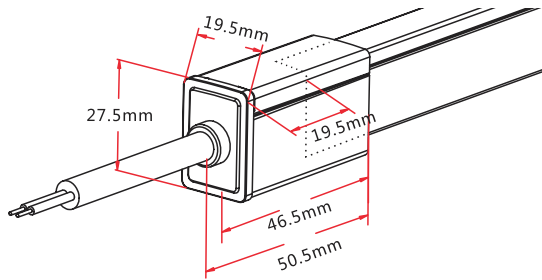

TOP END FEED

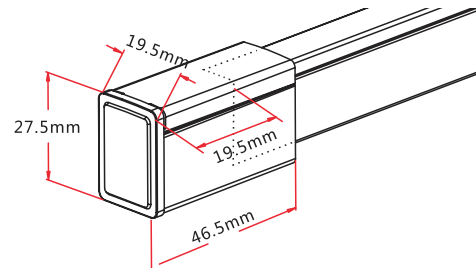

END CAP

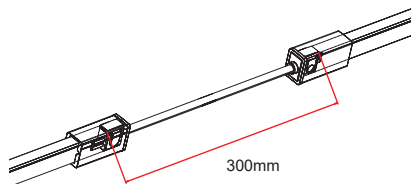

FLEXIBLE CONNECTOR


## SLIMLINE INJECTION MOULDING CONNECTIONS - IP67

REQUIRES FITTING AT FACTORY.  
LEAD TIMES APPLY  
SUITABLE FOR OUTDOOR  
APPLICATIONS  
FEED CONNECTORS SUPPLIED AS  
1M CABLE




**SIDE FEED      BOTTOM FEED      TOP END FEED      MIDDLE FEED      END CAP      FLEXIBLE CONNECTOR      T FEED**


WHITE / TUNEABLE / RGB	A80086	A80087	A80088	A80089	A80090	A80091	A80092
RGB CHASING / RGBW	A80086	A80087	A80088	-	A80090	A80091	A80092

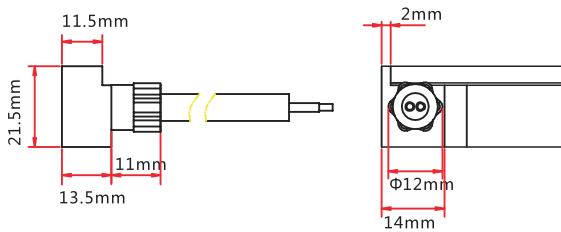


**SIDE FEED**

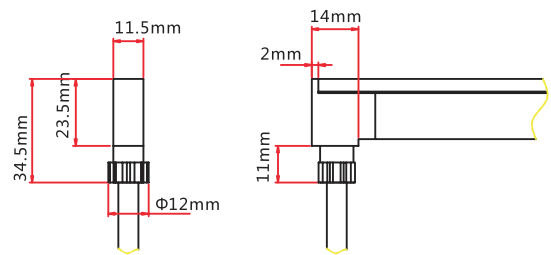


**BOTTOM FEED**

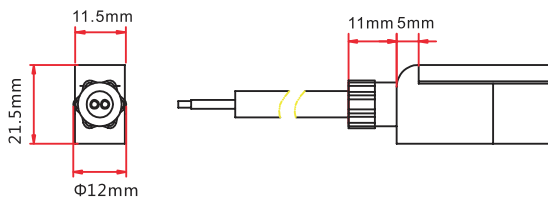


**TOP END FEED**

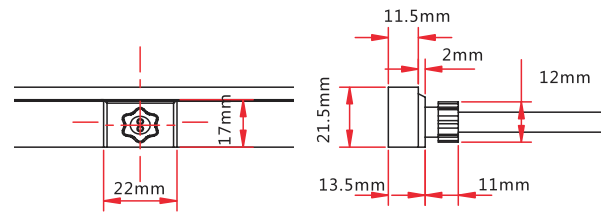


**MIDDLE FEED**

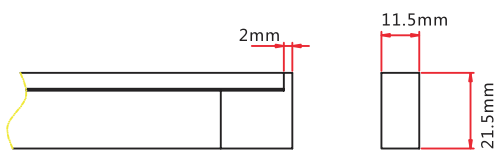

**END CAP**



**FLEXIBLE CONNECTOR**

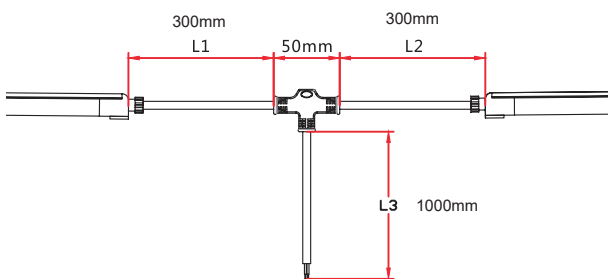

**T-FEED**



## CAPPED DUAL INJECTION MOULDING - IP68

REQUIRES FITTING AT FACTORY. LEAD TIMES APPLY  
 SUITABLE FOR OUTDOOR APPLICATIONS  
 FEED CONNECTORS SUPPLIED AS 1M CABLE



SIDE FEED

BOTTOM FEED

TOP END FEED

END CAP

FLEXIBLE CONNECTOR

WHITE / TUNEABLE / RGB /  
 RGB CHASING / RGBW


A80093

A80094


A80095

A80096


A80097

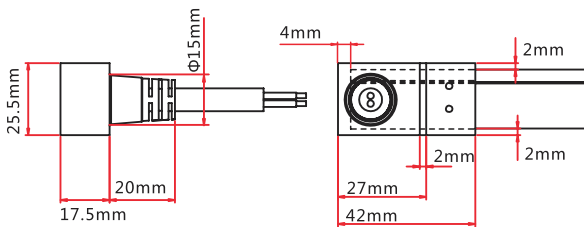


SIDE FEED

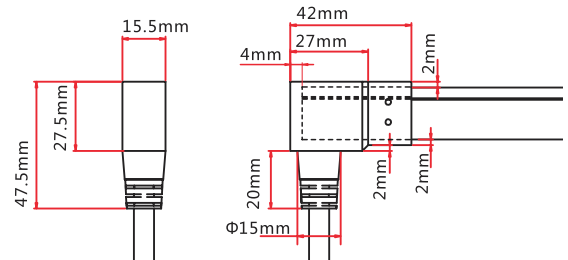


BOTTOM FEED

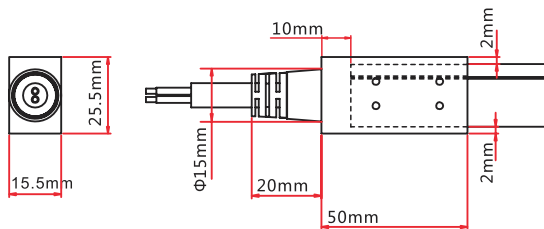


TOP END FEED

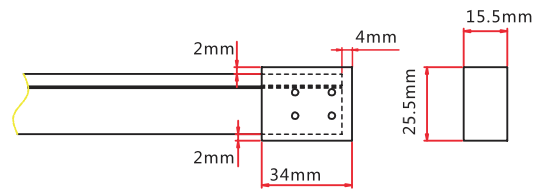






END CAP

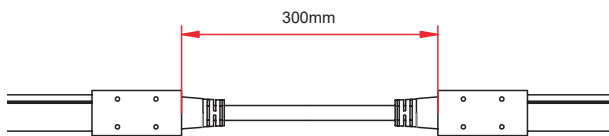

FLEXIBLE CONNECTOR

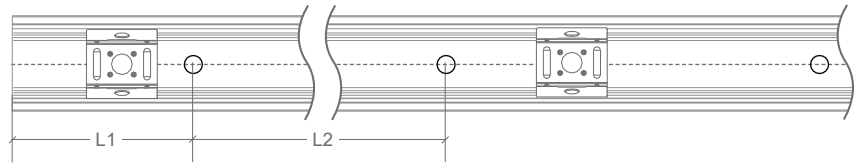



CODE	ACCESSORY	L1	L2	HOLE DIMENSIONS	HOLE NUMBER	CLIP NUMBER
A80104-001	SELF-LOCKING ALUMINIUM V2 PROFILE 2M	100mm	200mm	Ø3.5mm	10	9
A80105-001	SELF-LOCKING ALUMINIUM V2 MOUNTING CLIP 35MM	5mm	25mm	Ø3.5mm	2	1
A80106-001	PLASTIC PROFILE 2M	100mm	200mm	Ø3.5mm	10	-
A80106-002	PLASTIC PROFILE 1M	100mm	200mm	Ø3.5mm	5	-
A80107-001	CURVE STAINLESS STEEL PROFILE 900MM <i>MULTIPLE FIXING LOCATIONS</i>	-	-	-	-	-



**SELF-LOCKING ALUMINIUM  
V2 PROFILE 2M / MOUNTING CLIP**



**PLASTIC PROFILE**

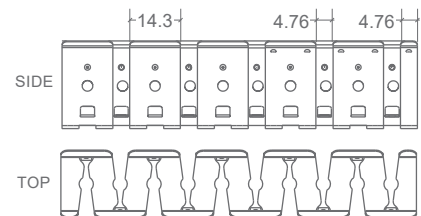

**CURVE STAINLESS STEEL  
PROFILE 900MM**