DALI gateway - Ethernet (A94291)

RJ45 Terminal

87654321

DALI Gateway - Ethernet

Power indicator

Prog. indicator : It turns to blue during reset

24VDC Input

DALI Output/Input

Reset Key: Long press it to help withdraw the device from Internet/APP.

Enable or disable to use built-in DALI PS by dial switches:

1 2 Disabled
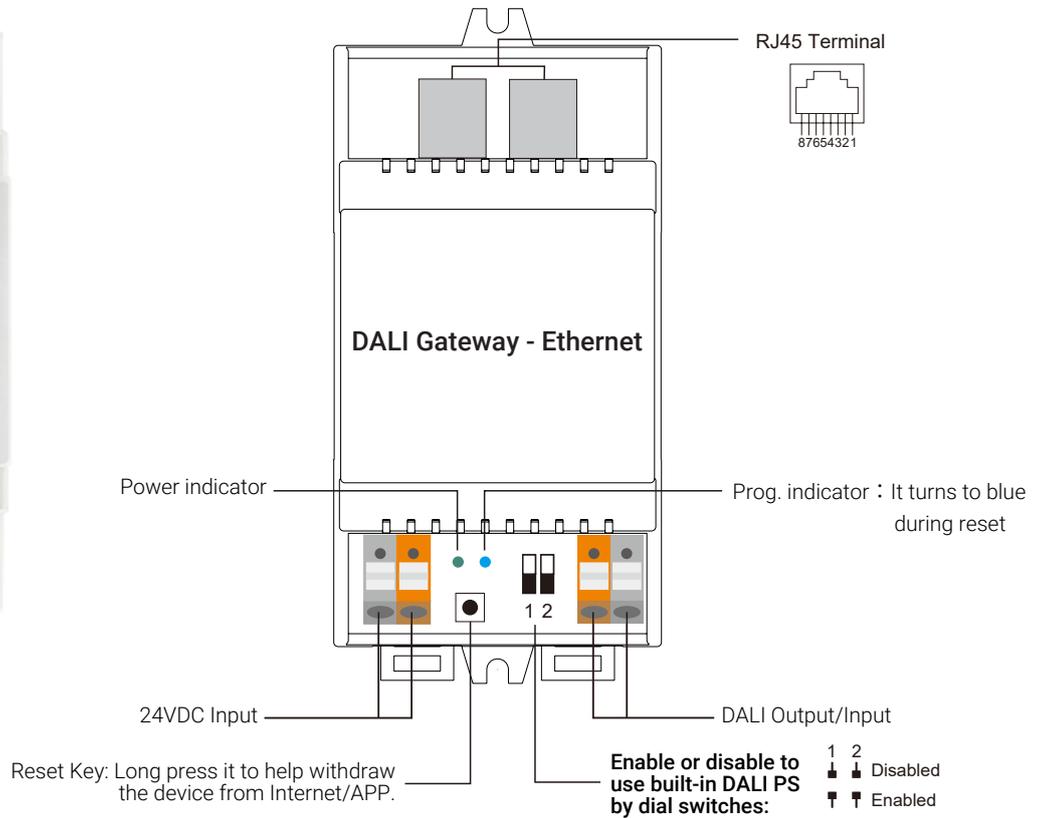1 2 Enabled

Technical information
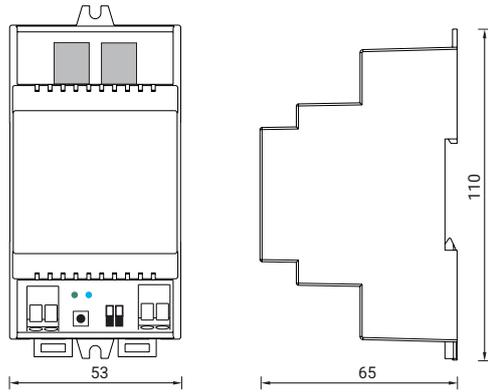
Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.
- Supports DT6, DT8 Tc, DT8 XY, DT8 RGBWAF device types
- Supports addressing, grouping and scene configuration for max.64 control gears (DALI-1 and DALI-2)
- Built-in 250mA DALI PS, no extra wiring required
- Easy connect to a network through Ethernet connection
- Easy & quick configuration through the mobile application
- Built-in battery, built-in RTC, supports timer task configuration
- Supports cycle schedule configuration, Circadian rhythm function is enabled
- Waterproof grade: IP20

While built-in DALI PS disabled

Input voltage	24VDC
Number of DALI Channel	1
DALI Current Consumption	Max. 2mA
Size (LxWxH)	110x53x65mm
Ambient temperature	-20 °C to 50 °C

DALI gateway - Ethernet (A94291)

Dimension

Wiring diagram

While built-in DALI PS disabled

11:11, 22-10-2025