

CT MON 02M/02F

Coin/token operated time counter
with alert



- Electronic timer operated by coins or tokens.
- Adjustable via DINUY - Configure App.
- It includes a time-out warning, which consists of a relay output that activates a short time before the main timer finishes. Its purpose is to activate a visual or audible signals as a pre-warning.
- Additional features:
 - Extra timing: allows you to assign a different timing when a number of coins/tokens exceeding the set amount is inserted.
 - Allows you to assign a different number of coins/tokens and timing according to a set schedule and calendar.

- The display shows the number of coins/tokens to be inserted, when idle, or the remaining time.
- Option to connect an external switch to pause the timer.
- Metal security box in white (RAL 9003) with a key lock.
- Spring connectors are included for easy connection.
- Application examples: campsites, tennis or paddle tennis courts, churches, gas stations, hospitals, laundromats, etc.

Technical characteristics


| REFERENCE | CT MON 01M | CT MON 01F |
|---------------------------|--|--------------------------|
| Activation | Coins | Tokens |
| Display | Yes | |
| Supply voltage | 230V- 50Hz | |
| Power self-consumption | < 1W | |
| Maximum allowed current | 16 A (Power factor=1) | |
| Adjustable time bounds | 1 sec .. 5 hours | |
| Coin/token limit | 1 .. 4 | |
| Maximum accumulative time | 18 hours | |
| Coin/token type | Only 1 type (1€ coin) Other coins by demand | Reference: AC CT- 005 |
| Color | White RAL 9003 | |
| Dimensions | 215 x 142 x 104 mm | |
| Degree of protection | IP20 according to UNE20324 | |
| Working temperature | -10°C ~ +45°C | |

Download the DINUY - Configure App to set up the timer



DINUY - Configure

Dimensions

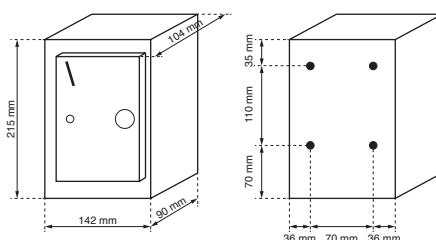

Instalation diagram

