


## RC KNX 001

### 5-channel Remote Control

#### Description

- RF-KNX compatible Remote Control for Lighting and Blinds/Shutters control.
- 5 output channels, 1 main channel and 5 scenes.
- Different working modes: Switch on/off, Dimmer, Blinds switch or Scene launcher.
- Battery-operated.

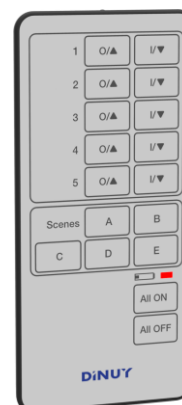

#### Technical Characteristics

Reference	RC KNX 001
Power Supply	1 battery 3V CR2032 (included)
Battery life	>8 years (with <100 act/day)
Radio-Frequency	Codified transmission in 868,4MHz with and a maximum coverage of 100 (in the free field)
Compatible with	RF-KNX: CH_Generic Switch_5 (0311h) CH_Battery_Status (0021h)
Working Modes	Switch ON/OFF Dimmer Blind/Shutter Control Scenes (2)
DINUY's Compatible Devices	CO KNX 001, IT KNX 001, MI KNX 001, PE KNX 001, CO KNX 002, RE KNX LE1, RE KNX LE2, RE KNX LE3, RE KNX DA1, RE KNX 010 & RE KNX RGB
Dimensions	105 x 50 x 12mm
Working Temperature	0°C ~ +45°C
Protection Degree	IP20, according to EN20324