


## REBA 50 /W Line

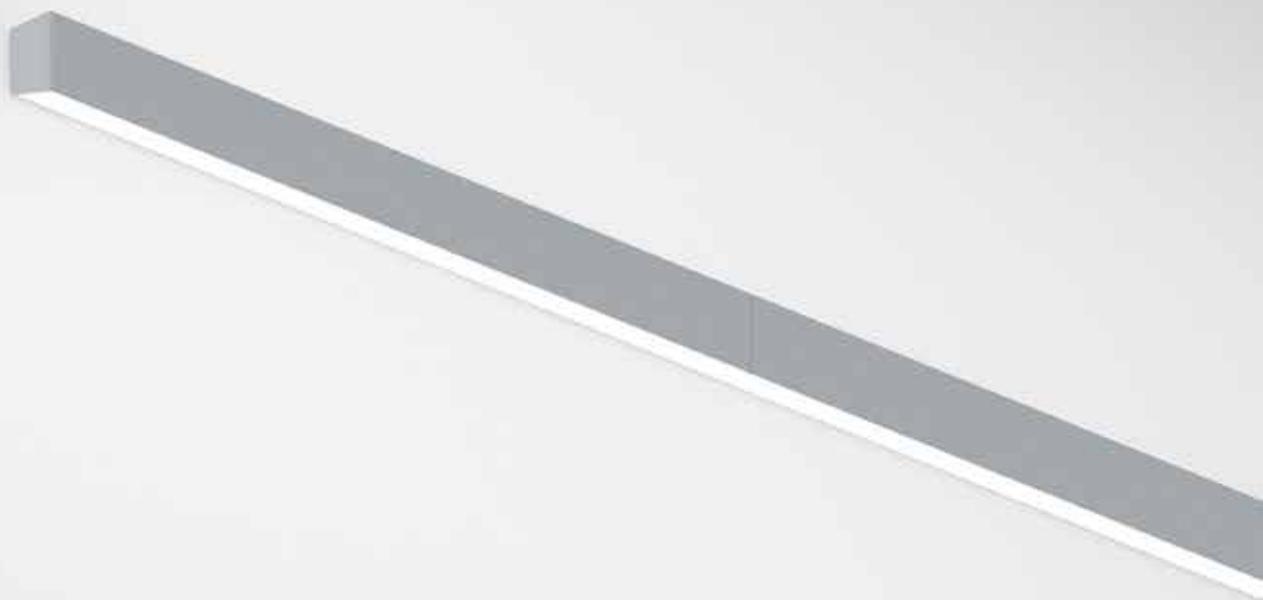

### Product characteristics

---

**Body**

Extruded aluminium profile

**Finish**

Powder coated

**Optical system**

bLINE - Opal diffuser

**Light source**

LED, RG1, CRI>80, MacAdam Step  $\leq 3$

**LED lifetime**

80.000h @ L90, B10, Ta 25°C

**Control gear**

LED driver 220-240V-50/60Hz included

---



230V/50Hz



IP 40


bLINE  
960°C

**01.** Select Outer Profile



**OUTER PROFILE**

**Start / End (SRT/END)**




Lmm	CODE*
1125	90526L0040▲0083
1405	90526L0050▲0083
1685	90526L0060▲0083
1965	90526L0070▲0083
2245	90526L0080▲0083
2525	90526L0090▲0083
2805	90526L0100▲0083

\*Replace the symbols to complete the code


Colour	▲
□ White	W
■ Grey	G
■ Black	B

**Middle (MID)**




Lmm	CODE*
1122	90526L0040▲0000
1402	90526L0050▲0000
1682	90526L0060▲0000
1962	90526L0070▲0000
2242	90526L0080▲0000
2522	90526L0090▲0000
2802	90526L0100▲0000

**Vertical corner (VRT)**




Lmm	CODE*
631	90526V0040▲0000

**Horizontal edge corner (EDGE)**



Lmm	CODE*
601	90526E0040▲0000

**Horizontal corner (HRZ)**



Lmm	CODE*
602	90526H0040▲0000


**OUTER PROFILE**

- To complete the product add the inner profile. Please order separately.
- To complete the line add the start kit, through-wiring and body connector kit. Please order separately.
- The maximum line length with 1 single feeding point is 30000 mm.


## 02. Select Inner and Outer Profile



### INNER PROFILE | DIRECT / INDIRECT



bLINE - Opal diffuser



	W	lm output	lm/W	Lmm	CODE*
	60	6724	112	1122	90536L004▼W0◆00
	70	8405	120	1402	90536L005▼W0◆00
	84	10085	120	1682	90536L006▼W0◆00
	104	11766	113	1962	90536L007▼W0◆00
	120	13447	112	2242	90536L008▼W0◆00
	130	15128	116	2522	90536L009▼W0◆00
	140	16809	120	2802	90536L010▼W0◆00
VRT	60	6724	112	631	90536V004▼W0◆00
EDGE	60	6724	112	601	90536E004▼W0◆00
HRZ	60	6724	112	602	90536H004▼W0◆00


\*Replace the symbols to complete the code

Control gear	
HF	E
DALI	H
HF+CD <sup>1</sup>	Q
SWD+CD <sup>2</sup>	Y


Emergency	
No EM	0
EM 3h (K3) <sup>3</sup>	3

Colour temp.	
3000K	3
4000K	0
Tunable White <sup>4</sup>	T

### INNER PROFILE | DIRECT




bLINE - Opal diffuser




	W	lm output	lm/W	Lmm	CODE*
	30	3362	112	1122	90535L004▼W0◆00
	35	4202	120	1402	90535L005▼W0◆00
	42	5043	120	1682	90535L006▼W0◆00
	52	5883	113	1962	90535L007▼W0◆00
	60	6724	112	2242	90535L008▼W0◆00
	65	7564	116	2522	90535L009▼W0◆00
	70	8405	120	2802	90535L010▼W0◆00
VRT	30	3362	112	631	90535V004▼W0◆00
EDGE	30	3362	112	601	90535E004▼W0◆00
HRZ	30	3362	112	602	90535H004▼W0◆00

### INNER PROFILE | INDIRECT



bLINE - Opal diffuser



	W	lm output	lm/W	Lmm	CODE*
	30	3362	112	1122	90518L004▼W0◆00
	35	4202	120	1402	90518L005▼W0◆00
	42	5043	120	1682	90518L006▼W0◆00
	52	5883	113	1962	90518L007▼W0◆00
	60	6724	112	2242	90518L008▼W0◆00
	65	7564	116	2522	90518L009▼W0◆00
	70	8405	120	2802	90518L010▼W0◆00
VRT	30	3362	112	631	90518V004▼W0◆00
EDGE	30	3362	112	601	90518E004▼W0◆00
HRZ	30	3362	112	602	90518H004▼W0◆00

<sup>1</sup> HF + Double circuit.

<sup>2</sup> SwitchDIM + Double circuit.

<sup>3</sup> Prepared for emergency remote control.

<sup>4</sup> Only available for the DALI and SWD+CD without emergency unit versions (No EM).

### 03. Select options

Options		Code*
<b>SwitchDIM Tunable White</b>		926600
<ul style="list-style-type: none"> <li>In the Direct version and in the Indirect version each SwitchDIM Tunable White allows the control up to 20 luminaires of L ≤ 1682 mm and up to 10 luminaires of L ≥ 1964 mm.</li> <li>In the Direct/Indirect version each SwitchDIM Tunable White allows the control up to 10 luminaires of L ≤ 1682 mm and up to 5 luminaires of L ≥ 1964 mm.</li> </ul>		
<b>Start kit - end cap start/end</b>		923400♣
• 2 end caps included.		
<b>Through-wiring</b>		
• <b>Standard</b>		
3 x 1,5 mm <sup>2</sup>		945650
5 x 1,5 mm <sup>2</sup>		945750
• <b>2 x 1,5 mm<sup>2</sup></b>		
HF+K3 (x1) - L562 - L1682 mm		948000
HF+K3 (x2) - L1964 - L2804 mm		948001
• <b>2 x 1,5 mm<sup>2</sup> + 5P terminal block</b>		
DALI+K3 (x1) - L562 - L1682 mm		948200
DALI+K3 (x2) - L1964 - L2804 mm		948201
• <b>2 x 1,5 mm<sup>2</sup> + 2 x 0,75 mm<sup>2</sup> + 5P terminal block</b>		
K3+TEL (x1) - L562 - L1682 mm		948100
K3+TEL (x2) - L1964 - L2804 mm		948101
<b>Body connector kit</b>		932120
• Steel body connector, screws included.		
<b>Blank part</b>		
L1500 mm		992960♣
L3000 mm		992961♣
• Includes inner profile and aluminium blank cover.		
<b>Signage</b>		
• Allows signs or text engraving on the outer profile.		
<b>Low Output version</b>		
• Under request.		
<b>Bespoke projects</b>		
• Under request.		



\*Replace the symbols to complete the code

Colour	♣
<input type="checkbox"/> White	W
<input checked="" type="checkbox"/> Grey	G
<input type="checkbox"/> Black	B




### Product details



Outer profile



Inner profile



End caps without visible screws



Body connector without light leakage



Light uniformity



Clip-in diffuser



Vertical corner



Edge corner



Horizontal corner



Wall application with direct/indirect light



Wall application with direct light



Wall application with indirect light



bLINE diffuser



SwitchDIM Tunable White



Start kit



Bespoke signage under request