



WARNING!


- The installation, maintenance and eventual replacement of this device must only be carried out by a qualified electrician.
- This device must not be repaired.
- All applicable local, regional and national regulations must be complied with during the installation, use, maintenance and replacement of this device.
- This device should not be installed if, when unpacking it, you observe that it is damaged.
- Toscano cannot be held responsible in the event of non-compliance with the instructions in this document and in the documents to which it refers.
- Do not install on lines without protective earth (PE).




HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Turn off all power supplying this device before working on it.
- Use a voltage tester on an appropriate range to verify that all live conductors are not energized.
- Failure to follow these instructions will result in death or serious injury.


Dimensions

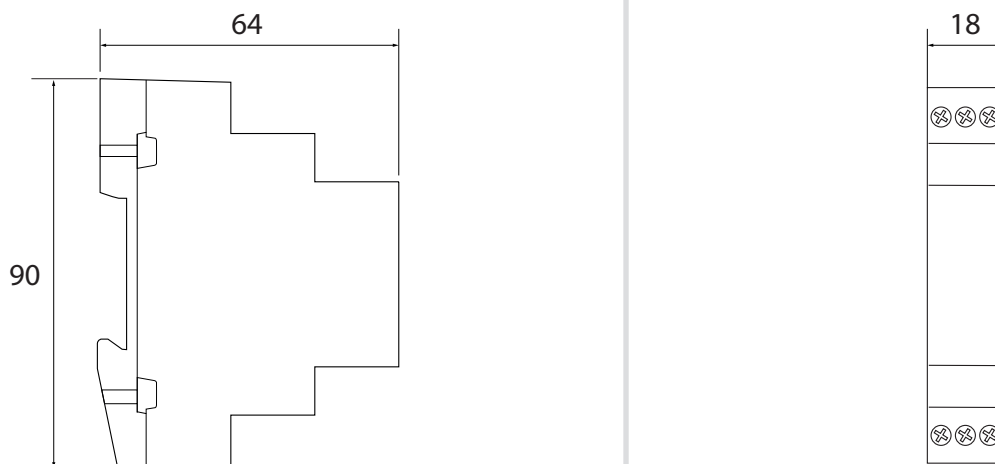

Electrical diagrams

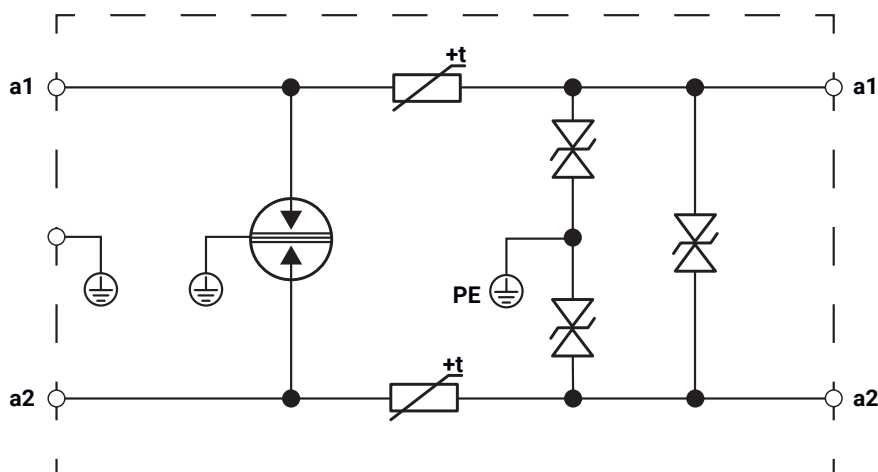

Wiring

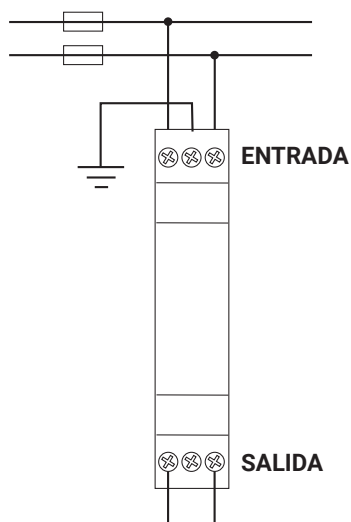

Technical specifications

GENERALS	Rated voltage Un	12 - 24 VAC/VDC
	Maximum voltage Uc	30 VAC/VDC
	Bandwidth	4 MHz
	Maximum terminal cross-section (input / output)	2.5 / 4 mm ²
	Signals	Profibus/4-20
	Mounting	Rail DIN 35
	Standards	2014/35/UE (LVD) 2014/30/UE (EMC) 2011/65/UE (RoHS)
	Dimensions (width x height x depth)	18 x 90 x 64 mm
OVERVOLTAGE	Average weight approx.	36 g
	Level protection Up	40 VAC/VDC
	Maximum discharge current (8/20µs) I _{max}	10 kA
	Rated discharge current (8/20µs) I _n	5 kA
	Type	3
	Product standards	IEC/EN 61643-21

Description

Overvoltage protector for protection against transient overvoltages, on VAC/VDC lines (depending on the model). Install as close as possible to the equipment to be protected.

Prevents damage that these transient overvoltages may cause to the equipment supplied by that network.

This equipment DOES NOT PROTECT against PERMANENT overvoltage.

Check the standards that our products comply with and download their declaration of conformity at:
toscano.es/standards

