

Minimal Track

ARKOSLIGHT

Minimal Track is a 24V low-voltage lighting system designed to create minimalist and highly configurable installations. On this page, you'll find the necessary components to configure your surface-mounted system.



Or use our online configurator to design your own custom product layout. The tool will guide you through the process and automatically calculate the required drivers and accessories. [Start your configuration →](#)




Track & accessories - Surface mounting

Configure the shape of your track, add end caps and the required accessories, and finish the setup with the conductive strip (rubber cable).

MINIMAL TRACK 24V

Profile 2m


A384-02-00- | N | WT |



Corner 90° 1 Plane

A384-00-02- | N | WT |


Cable length = 35mm.



Curve 350 1 Plane

A384-00-09- | N | WT |


Cable length = 650mm.



Rubber Cable n x 1m

A384-00-01- | N |


n = Total length of System



Corner 90° 1 Plane Rounded

A384-00-03- | N | WT |

Cable length = 35mm.



End Cap

A384-00-05- | N | WT |




24V | Max. 4A |



Corner 90° 2 Planes


A384-00-04- | N | WT |

Cable length = 100mm.



Connection Box

A384-00-06- | N | WT |



Power Supply


Select your power supply, include a dimmer if needed, and explore the installation diagrams provided.

					P	V	D [A x B x C]
MINIMAL TRACK 24V Power Supply Box		A384-00-07-	NT WT		40W	24V	280 x 30 x 24mm
		A384-00-08-	NT WT		100W	24V	280 x 30 x 24mm
MINIMAL TRACK 24V Remote Power Supply		0434-01-37			60W	24V	180 x 52 x 30mm
		0433-10-22			100W	24V	295 x 43 x 30mm


220 V~
240

MINIMAL TRACK 24V Remote Constant Voltage Dimmer		0433-01-32	DALI / Push	24V	181 x 42 x 20mm
		0433-01-35	CASAMBI	24V	72,6 x 30 x 18mm

24V | other DIM options please consult

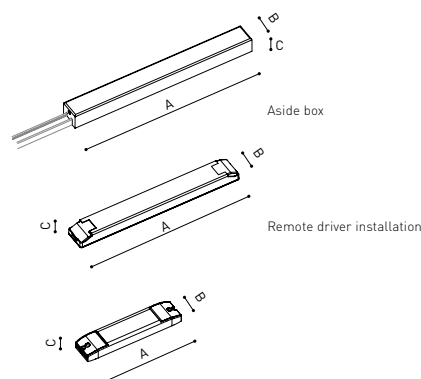

Connection diagram:

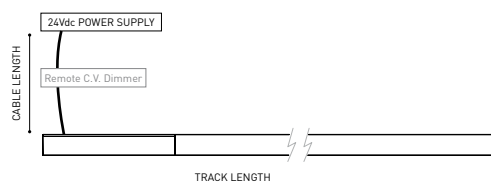

DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
		TRACK LENGTH (m)			
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X


CONNECTION BOX /
POWER SUPPLY BOX

MINIMAL TRACK 24V PROFILE 2m

MINIMAL TRACK 24V PROFILE 2m

MINIMAL TRACK 24V PROFILE 2m

END CAP



COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 |

Calle N, s/n - Pol. Ind. El Olival
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

INSTALLATION GUIDE
<https://youtu.be/KnedJbKp7oo>




Minimal Track

ARKOSLIGHT

Minimal Track is a 24V low-voltage lighting system designed to create minimalist and highly configurable installations. On this page, you'll find the necessary components to configure your suspension-mounted system.



Or use our online configurator to design your own custom product layout. The tool will guide you through the process and automatically calculate the required drivers and accessories. [Start your configuration →](#)

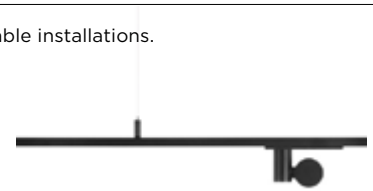


Track & accessories - Suspension mounting


Configure the shape of your track, add end caps and the required accessories, and finish the setup with the conductive strip (rubber cable).

MINIMAL TRACK 24V Suspension

Profile 2m
A384-02-00- | N | WT |




Rubber Cable n x 1m
A384-00-01- | N |



Suspension Straight Joiner
A400-00-02- | N | WT |




Profile 2m Initial feed kit
A400-02-10- | N | WT |



Profile 2m Middle feed kit*
A400-02-20- | N | WT |




Suspension Kit
A400-02-04- | N | WT |




Max distance between suspension kits = 100 cm.

Corner 90°
A400-00-03- | N | WT |



Curve 350 1 Plane
A384-00-09- | N | WT |



Suspension End Caps
A400-00-05- | N | WT |



Two End Caps Included.


Power Supply

Select your power supply, include a dimmer if needed, and explore the installation diagrams provided.


	P	V	D [A x B x C]
MINIMAL TRACK 24V Suspend Power Supply Box	A400-00-06- NT WT	40W 24V	280 x 30 x 36mm
	A400-00-07- NT WT	100W 24V	280 x 30 x 36mm
MINIMAL TRACK 24V Remote Power Supply	0434-01-37	60W 24V	180 x 52 x 30mm
	0433-10-22	100W 24V	295 x 43 x 30mm
MINIMAL TRACK 24V Remote Constant Voltage Dimmer	0433-01-32	DALI / Push 24V	181 x 42 x 20mm
	0433-01-35	CASAMBI 24V	72,6 x 30 x 18mm

220 V~
240

24V | other DIM options please consult

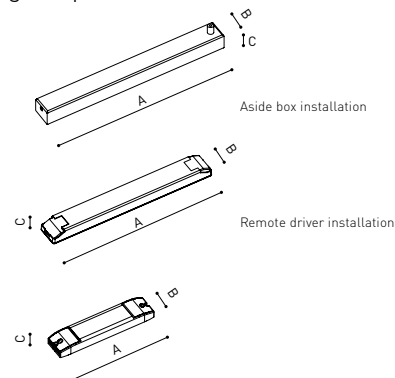


Connection diagram:

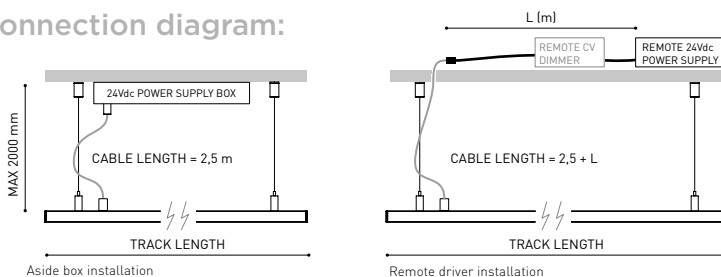

DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm²)	CABLE LENGTH (m)			
		<5	<10	<20	<30
		TRACK LENGTH (m)			
40	0,75	30	30	30	30
	1,5	30	30	30	30
60	0,75	30	30	20	10
	1,5	30	30	30	20
100	0,75	20	10	X	X
	1,5	20	20	10	X

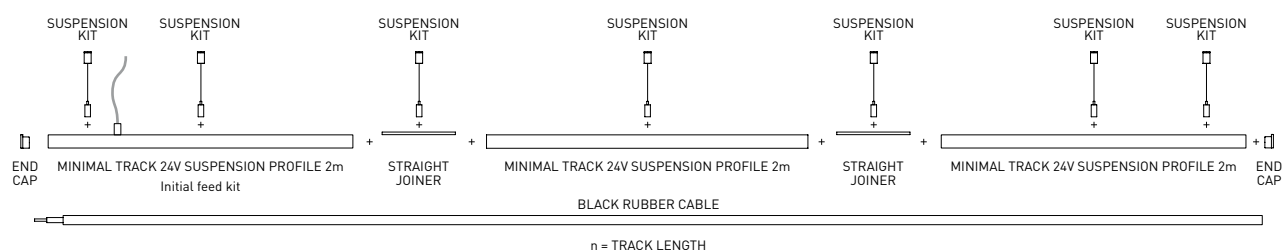

COLOUR | NT ■ RAL 9005 | WT □ RAL 9016 | N ■ RAL 9005 |

Calle N, s/n - Pol. Ind. El Oliveral
46394 Ribarroja del Turia-Valencia (Spain)
info@arkoslight.com - www.arkoslight.com

