

Standard Installation

INVISI-MOUNT

CANOPY 2" DIAMETER



Flammable



Warning



Hot Surface

TOOLS NEEDED:	 5/64" Allen Wrench
	 Waterproof Wire Connectors
	 Drill with 1-1/2" Core Drill Bit

INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS IMPORTANT SAFETY INSTRUCTIONS

Lighted fixture is HOT!
WARNING - To reduce the risk of FIRE OR INJURY TO PERSONS:
 Turn off/unplug and allow to cool before replacing lamp/LED. Fixture gets HOT quickly! Contact only switch/plug when turning on. Do not touch hot lens, guard, or enclosure. Keep fixture away from materials that may burn. Do not operate the luminaire fitting with a missing or damaged shield. Do not touch the source at any time. Use a soft cloth or gloves. Oil from skin may cause damage.


SAVE THESE INSTRUCTIONS

IMPORTANT SAFETY INFORMATION - READ, FOLLOW, AND SAVE ALL SAFETY AND INSTALLATION INSTRUCTIONS

- Product must be installed by a qualified person in a manner consistent with its intended use and in compliance with the National Electrical Code, Canadian Electrical Code, and all Local and Provincial Codes.
- Follow product label information and instructions.
- Qualified Personnel with appropriate personal protective equipment must perform all servicing of this product.
- Before wiring to power supply and during servicing, turn off and lock out power at fuse or circuit breaker before service.
- The use of accessory equipment not recommended by the manufacturer or installed contrary to instructions may cause an unsafe condition. The use of damaged components may cause an unsafe condition and void product warranty.
- Do not block light emanating from product in whole or part, as this may cause an unsafe condition.
- Never operate the fixture with missing or damaged lens. Lens must be cleaned on regular basis.
- Entire fixture may become extremely hot. Do not touch hot lens or fixture body.
- Replace LED assembly only with correct wattage and type of power supply appropriate for LED assembly.
- All gaskets, o-rings and sealing surfaces must be kept clean during installation and service; failure to do this may cause an unsafe condition and void product warranty.

IMPORTANT LISTINGS AND CERTIFICATIONS

- Suitable for wet locations

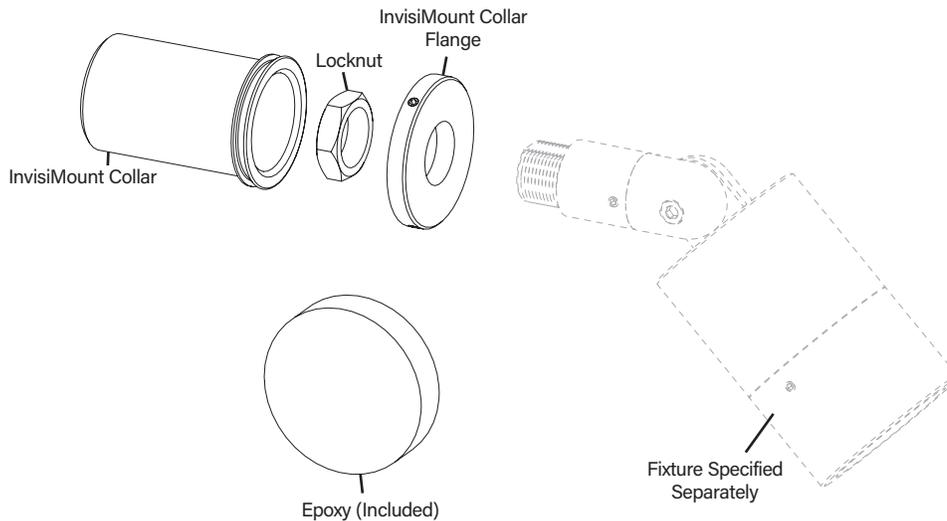

INVISI-MOUNT COLLAR FOR 1/2" NIPPLE

IMPORTANT SAFETY INFORMATION - READ, FOLLOW, AND SAVE THESE INSTALLATION INSTRUCTIONS

B-K LIGHTING	40429 Brickyard Drive • Madera, CA 93636 • USA 559.438.5800 • FAX 559.438.5900 www.bklighting.com • info@bklighting.com	RELEASE DATE	REFERENCE NUMBER
		10/03/2025	INS-2906-00


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING, INC. IS STRICTLY FORBIDDEN.

INVISI-MOUNT


CANOPY 2" DIAMETER




Standard Installation

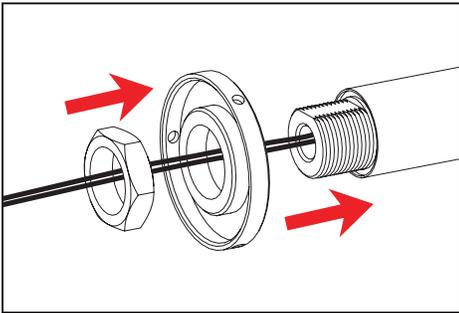


1. Thread fixture (Specify Separately) leads and mounting nipple through canopy. Secure with locknut.

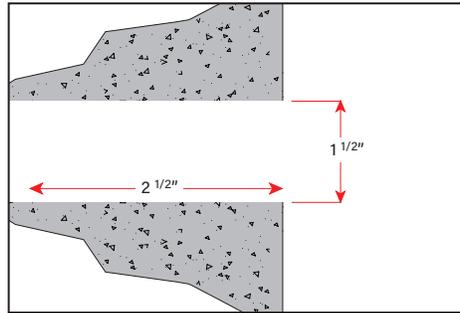


2. Core drill a 1-1/2" dia. hole min. 2-1/2" deep into mounting structure with wireway. Do not exceed diameter, flange is 1.7" dia.

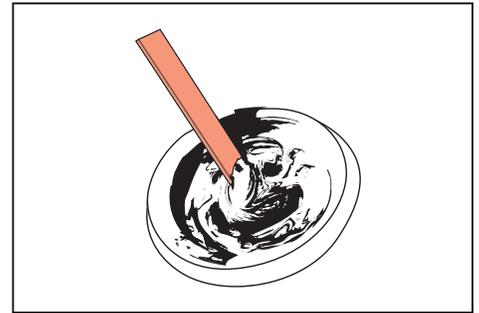

3. Prepare epoxy according to instructions on packaging.

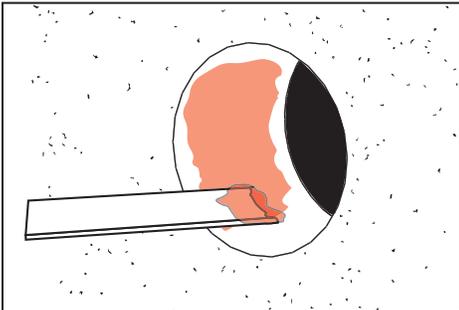


4. Use mixing stick to apply the epoxy to the interior of the 1-1/2" hole as shown.

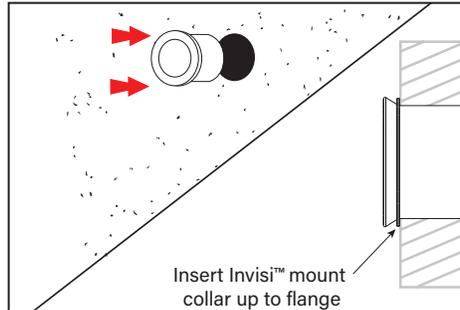


Insert Invisi™ mount collar up to flange

5. Fit InvisiMount collar into hole until flange comes in contact with building material. Wipe off any excess adhesive.


⚠ NOTE: Do not insert InvisiMount collar beyond flange!

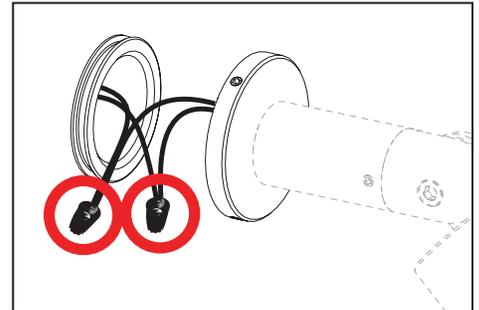

6. Pull wires from remote power supply. Leave sufficient wire length for maintenance and service. Make watertight connections from remote power supply to fixture leads using waterproof wire connectors (not included). **See wiring diagram.**

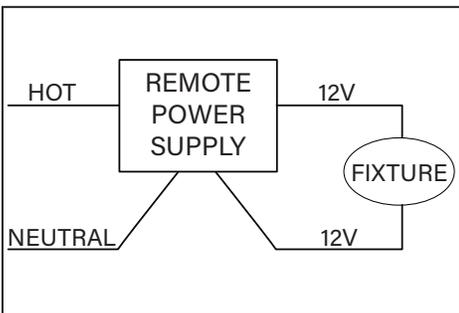

WIRING DIAGRAM

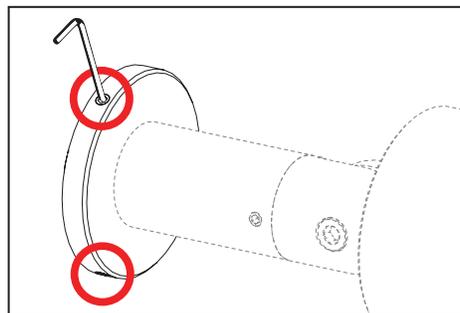

7. Insert connections, wires and fixture into InvisiMount collar. Align fixture within collar according to lighting plan. Tighten three (3) #8-32 set screws using a 5/64" allen wrench.

**IMPORTANT SAFETY INFORMATION LISTED ON REVERSE
READ, FOLLOW, AND SAVE ALL SAFETY AND INSTALLATION INSTRUCTIONS**



B-K LIGHTING

40429 Brickyard Drive • Madera, CA 93636 • USA
559.438.5800 • FAX 559.438.5900
www.bklighting.com • info@bklighting.com

RELEASE DATE
10/03/2025

REFERENCE NUMBER
INS-2906-00