



LED PANEL SQUARE 40W

Item #:	LPS2626ALB/LPS2633ALF/LPS3104BB/ LPS3111BF
Input V	220-240V
Working Current(mA)	1050mA
Watts(W)	40W
Color Temp.(K)	6000K-4000K
Luminous Flux (Lm)	3520Lm
Lifetime(hours)	40000h
Protection Rate	IP20
Dimension (LxWxH)	595x595x10.4
Material Colors	White-Aluminum

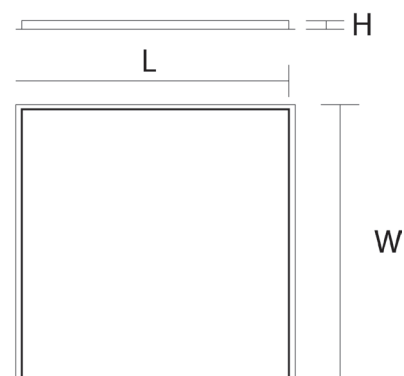

INSTALLATION:

1. Turn off the power.
2. Connect the commercial power with the input of the matched power supply, make sure that no copperware is exposed.
3. Connect matched power supply and panel light together through the plug.
4. Fix the panel light and power supply at suitable place.
5. Turn on the power.

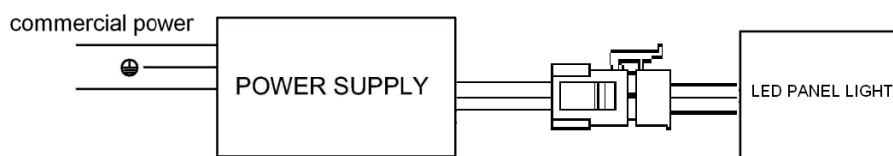

NOTES

The panel should be driven by appointed power supply.

Working out of temp. range $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$ will shorten the lifetime of luminaires.

Installation and maintenance must be done by professionals. Do not open the luminaire without consent of the manufacturer


The manufacturer reserves the right to refuse warrant service if the product shows signs of damage due to incorrect maintenance or installation.

ADDITIONAL KITS:

	REF	Info.	EAN
	KITSPRING	KIT para colgar Panel	8435298012664
	KITSURF	KIT SUPERFICIE Panel 60x60 Marco Aluminio	8435298012671
	KITSURFWHITE	KIT SUPERFICIE Panel 60x60 Marco Blanco	8435298015054
	KITSUSPEN	KIT SUSPENSIÓN Panel 60x60	8435298014064


LED PANEL SQUARE 40W

# Producto:	LPS2626ALB/LPS2633ALF/ LPS3104BB/LPS3111BF
Voltaje (V)	220-240V
(mA)	1050mA
Vatios (W)	40W
Temperatura Color (K)	6000K-4000K
Flujo Luminoso (Lm)	3520Lm
Horas de vida	40000h
Nivel Protección	IP20
Dimensiones (LxWxH)	595x595x10.4
Colores Material	Blanco-Aluminio

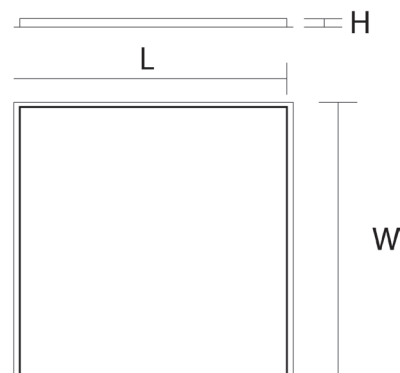

INSTALACIÓN:

1. Apague la corriente antes de comenzar la instalación.
2. Conecte la corriente a la terminal del driver. Asegúrese de que no queden expuestos los cables.
3. Conecte el driver con el conector del panel.
4. Instale el Panel en su techo.
5. Tras revisar que el montaje es correcto puede volver a encender la corriente.

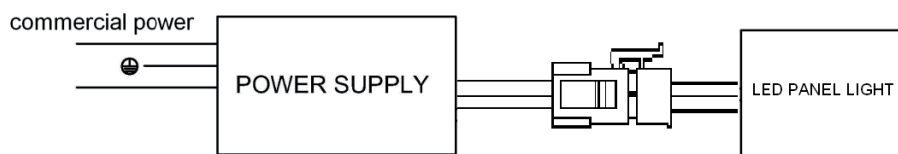

NOTAS

Utilice el driver que viene incluido con este panel.

Utilizar la luminaria fuera del rango de temperatura de -20°C ~ +40°C acorta la vida útil del producto-
Consulte la ayuda de un profesional para la instalación de este producto. No abrir la luminaria sin supervisión o consentimiento del fabricante.

En caso de daños por mala instalación o mal mantenimiento la empresa se reserva el derecho a rechazar el servicio de garantía

KITS ADICIONALES:

	REF	Info.	EAN
	KITSPRING	KIT para colgar Panel	8435298012664
	KITSURF	KIT SUPERFICIE Panel 60x60 Marco Aluminio	8435298012671
	KITSURFWHITE	KIT SUPERFICIE Panel 60x60 Marco Blanco	8435298015054
	KITSUSPEN	KIT SUSPENSIÓN Panel 60x60	8435298014064