

**Test Report**

Number: SZHH01590174

Applicant: GTS SPORTS CO., LIMITED  
Yanjiang Industrial Zone, Gekeng village  
Hengli Town Dongguan City  
Guangdong Province, China

Date: Aug 09, 2021

Attn: Harry

**Sample Description:**

Four (4) pieces of submitted sample said to be :

Item Name	:	<b>Helmet</b>
Item/Model No.	:	<b>SKH-001</b>
Helmet Size	:	L 58-61cm
Material for Helmet	:	Shell: ABS+EPS Liner
Date Manufactured	:	2021/06
Country of Origin	:	China
Date Sample Received	:	Jul 01, 2021
Testing Period	:	Jul 01, 2021 ~ Aug 09, 2021



**Tests conducted:**

As requested by the applicant, refer to attached page(s) for details.



Page 1 of 12



中国认可  
国际互认  
检测  
**TESTING**  
**CNAS L0327**

**Test Report**

Number: SZHH01590174

Conclusion:

Tested sample  
Submitted helmets

Standard

EN 1078:2012+A1:2012 Standard Specification for  
Helmets Worn by Users of Pedal Cycles, Skateboards  
and Roller Skates

Result

Pass

Authorized by:  
For Intertek Testing Services  
Shenzhen Ltd.

*Andy Fu*



Andy, Fu Bo  
Title: Asst. Manager  
CNAS Approved Signatory



Page 2 of 12





**Test Report**

Number: SZHH01590174

Tests Conducted

1 Standard Specification for Helmets Worn by Users of Pedal Cycles, Skateboards and Roller Skates

As per EN 1078:2012+A1:2012: standard specification for helmets worn by uses of pedal cycles, skateboards and roller skates.

Number of samples tested: Four (4) sets.

Helmets size: 58-61cm

Test headform: M

Clause	Test Items	Result
4.1	Materials For those parts of the helmet coming into contact with the skin, the material used should be known not to undergo appreciable alteration from contact with sweat or with substances likely to be found in toiletries. Materials shall not be used which are known to cause skin disorders.	
4.2	Construction The helmet normally consists of a means of absorbing impact energy and means of retaining the helmet on the head in an accident. The helmet should be durable and withstand handling. The helmet shall be so designed and shaped that parts of it (visor, rivets, ventilators, edges, fastening device and the like) are not likely to injure the user in normal use. NOTE Helmets should: - have low weight; - be ventilating; - be easy to put on and take off; - be usable with spectacles; - not significantly interfere with the ability of the user to hear traffic noise.	P
4.3	Field of vision When tested in accordance with 5.7 there shall be no occultation in the field of vision bounded by angles as follows (see Figure 1 in EN 1078:2012+A1:2012): - horizontally: min. 105° from the longitudinal vertical median plane to the left and right hand sides; - upwards: min. 25° from the reference plane; - downwards: min. 45° from the basic plane.	P (Horizontally: >105° Upwards: >25° Downwards >45°)





**Test Report**

Number: SZHH01590174

Tests Conducted

Clause	Test Items	Result
4.4	Shock absorbing capacity The helmet shall give protection to the forehead, rear, sides, temples and crown of the head. When tested in accordance with 5.3 and 5.4 the peak acceleration shall not, for each impact, exceed 250 g for the velocity of 5,42 (+0.1, 0), m/s on the flat anvil, and 4,57 (+0.1, 0)m/s on the kerbstone anvil.  NOTE These are theoretically equivalent to 1 497 mm and 1 064 mm drop heights respectively.	P (See appendix)
4.5	Durability After being tested the helmet shall not exhibit damage that could cause significant injury to the wearer (sharp edges, points).	P (No damage & significant injury)
4.6	Retention system	
4.6.1	General Means shall be provided for retaining the helmet on the wearer's head. All parts of the retention system shall be securely attached to the helmet.	P
4.6.2	Chin strap The chin strap shall not include a chin cup. Any chin strap shall be no less than 15 mm wide (W). Chin straps may be fitted with means of enhancing comfort for the wearer.	P (W:16.0 mm)
4.6.3	Fastening device Any retention system shall be fitted with a device to adjust and maintain tension in the system. The device shall be capable of adjustment so that the buckle does not sit on the jaw bone.	P
4.6.4	Colour No part of the retention system shall be coloured green.  NOTE It is recommended that the opening mechanism be marked with red or orange colour.	P (Black)
4.6.5	Strength When tested in accordance with 5.5, the dynamic extension of the retention system shall not exceed 35 mm and the residual extension shall not exceed 25 mm. For this purpose, extension includes slippage of the fastening device. Damage to the retention system shall be accepted provided that the above requirements are met.  NOTE In this test, slippage of the fastening device can be measured and recorded separately from other contributions to the extension but this is for information only and is not subject to a separate requirement.	P (See appendix)





**Test Report**

Number: SZHH01590174

Tests Conducted

Clause	Test Items	Result
4.6.6	Effectiveness When tested in accordance with 5.6 the helmet shall not come off the headform.	P (Did not come off)
4.6.7	Ease of release Following the strength test in accordance with 5.5 and with the load still applied, it shall be possible to open the release system with one hand.	P
5.2	Inspection and determination of mass Inspect the helmet to ascertain whether it is suitable for its intended purpose and fulfils the general requirements in 4.2.  Determine the mass of the helmets of the same size submitted for testing. Calculate and record the mean value in g rounded off to the nearest 10 g, stating the size of the helmet.	P (See appendix)
6	Marking Each helmet shall be marked in such a way that the following information is easily legible by the user and is likely to remain legible throughout the life of the helmet: a) number of this European Standard; b) name or trademark of the manufacturer; c) designation of the model; d) designation, which shall be one or more of the following: Helmet for pedal cyclists, skateboarders or roller skaters; e) size or size range of the helmet, quoted as the circumference (in centimeters) of the head which the helmet is intended to fit; f) weight of the helmet (the average mass in grams determined according to 5.2); g) year and quarter of manufacture; h) following text:  "Warning! This helmet should not be used by children while climbing or doing other activities when there is a risk of strangulation/hanging if the child gets trapped with the helmet."  In addition, if the helmet has components made of material which are known to be adversely affected by contact with hydrocarbons, cleaning fluids, paints, transfers or other extraneous additions, the helmet shall carry an appropriate warning.	P
	If there is a consumer sales packaging, the information specified in a), b), d) and h) shall also be given on that package. The text shall be of minimum font size 12.	NA



## Test Report

Number: SZHH01590174

### Tests Conducted

Clause	Test Items	Result
7	<p>Information supplied by the manufacturer</p> <p>With every helmet, clear information in the language of the country of sale shall be given as follows:</p> <p>a) that the helmet can only protect if it fits well and that the buyer should try different sizes and choose the size which feels secure and comfortable on the head;</p> <p>b) that the helmet should be adjusted to fit the user, e.g. the straps positioned so that they do not cover the ears, the buckle positioned away from the jawbone and the straps and buckle adjusted to be both comfortable and firm;</p> <p>c) how the helmet should be positioned on the head to ensure the intended protection is provided (e.g. hat it should be placed so as to protect the forehead and not be pushed too far over the back of the head);</p> <p>d) that a helmet cannot always protect against injury;</p> <p>e) that a helmet subjected to a severe impact should be discarded and destroyed;</p> <p>f) a statement of the danger of modifying or removing any of the original component parts of the helmet other than as recommended by the manufacturer, and that helmets should not be adapted for the purpose of fitting accessories in a way not recommended by the manufacturer.</p>	P

Abbreviation: P = Pass; NA = Not Applicable

### Appendix:

#### Section 5.2 – Inspection and determination of mass

Sample No.	Mass (g)
1	480.0
2	478.1
3	481.1
4	478.8
Average(rounded off to nearest 10g)	479.5 (480)

#### Section 4.4–Shock absorbing capacity

Ambient temperature at time of test: 22.0°C

Sample No.	Environment Impact	Test anvil	Location Impact	Velocity (m/s)	Peak (Gn)	Compliant
1	High	Kerbstone	Left Rear	4.57	91.3	Pass
		Flat	Rear	5.46	156.1	Pass
2	Low	Flat	Front	5.49	122.9	Pass
		Kerbstone	Crown	4.61	87.8	Pass
3	Artificial ageing	Kerbstone	Right	4.58	91.5	Pass
		Flat	Left	5.45	158.9	Pass



Page 6 of 12



**Test Report**


Number: SZHH01590174

Tests Conducted

**Section 4.6.5–Retention system strength**

Sample No.	Dynamic extension (mm)	Residual extension (mm)	Compliant
2	25.2	9.7	Pass
3	23.2	8.0	Pass

**Photos for reference**

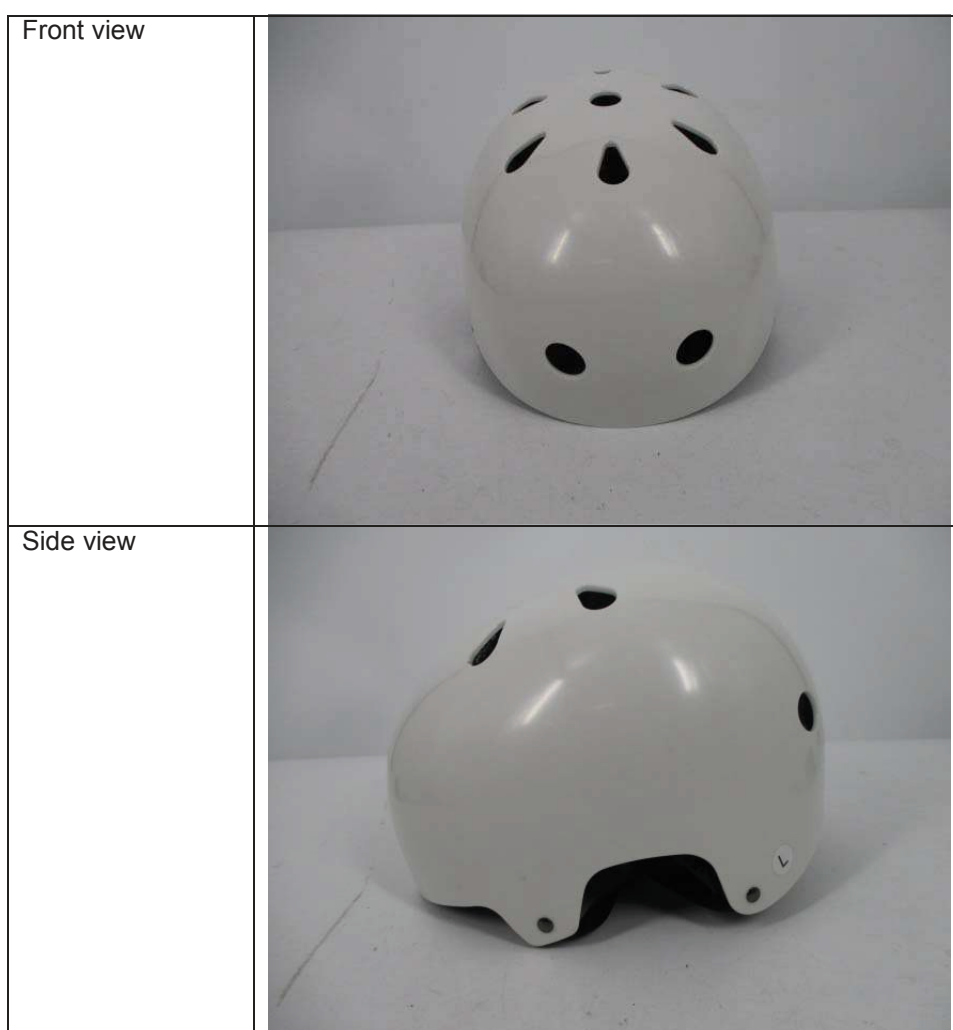


Page 7 of 12

**Test Report**

Number: SZHH01590174

Tests Conducted

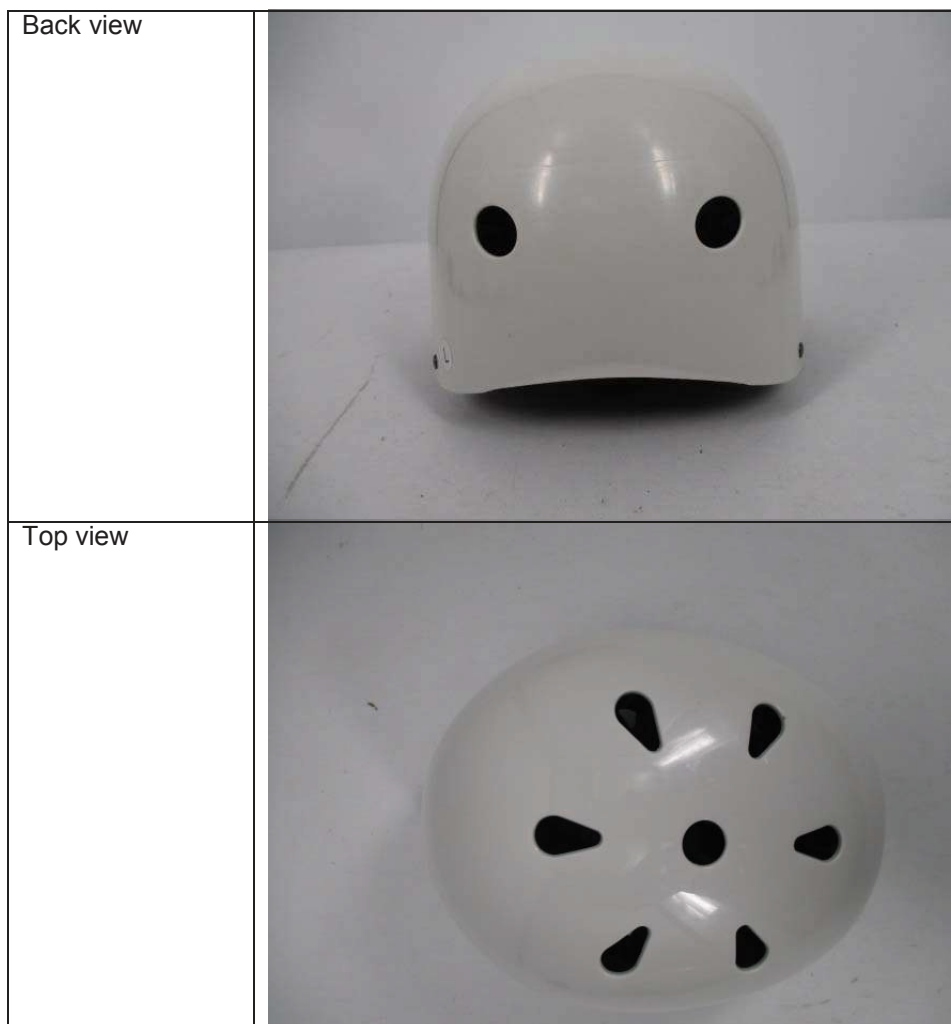



**Test Report**

Number: SZHH01590174

Tests Conducted

Bottom view	
Label	<div> <p>Model: SKH-001 Size: L(58-61)cm Weight: 480g Production: July 2021 Made in China</p> <p>警告语贴纸: 100*30mm</p> <p>WARNING! Warning! This helmet should not be used by children while climbing or doing other activities when there is a risk of strangulation/hanging if the child gets trapped with the helmet. Lightweight protective helmet designed for pedal cyclists, skateboarders or roller skaters use only. Constructed of expanded polystyrene. Helmets can be seriously damaged by substances such as solvents, paints, adhesives and cleaning solutions. Make no modifications. Helmet is made almost entirely of polystyrene and may be easily penetrated by sharp objects. No Protective headgear can protect the wearer against all unforeseeable impacts and this unit will not eliminate all possibility of injury even when worn properly A helmet subjected to severe impact shall be discarded and destroyed. This helmet must be of good fit and fastened securely under the jaw.</p> <p>Manufacture Factory: GTS SPORTS CO., LIMITED Address: Yanjiang Industrial Zone, Gekeng Village, Hengli Town Dongguan City, Guangdong Province, China</p> </div> <div> <p>21.00 mm</p> <p>19.00 mm</p> <p><b>UK CA</b></p> <p>EN1078: 2012+ A1: 2012</p> </div>



Page 9 of 12

## Test Report

Number: SZHH01590174

### Tests Conducted

Instruction	<p><b>WARNINGS</b></p> <p>No helmet can protect against all types of accidents. Helmets reduce or prevent many injuries, but even low speed impact accidents can result in serious or fatal injury. This helmet should not be used with or on any motorized vehicle. This helmet is to be used with skateboards, inline skates, rollerskates and bicycles only. Always skate or ride within your ability. Action sports are dangerous and can result in injury or death even when full safety gear is worn. There are loose straps on this helmet that can get caught on objects. Do NOT wear this helmet in areas where the straps could get caught like play areas and any climbing activities. If the helmet is dropped or suffers any impact, it should be replaced immediately. The shock absorption pads in the helmet become less effective after impact and will no longer protect you. Do not make any adjustments or modifications to this helmet. Helmets are worn to protect your head. Full safety gear should also be worn during the participation of any action sports. Full safety gear includes Knee, Elbow and Wrist Guards.</p> <p><b>FITTING INSTRUCTIONS</b></p> <p>To ensure maximum protection and comfort, the buyer should try different size to choose the right size and must be worn correctly to ensure proper fit. Your helmet should not obstruct your vision. Your helmet fitted with padding to ensure maximum comfort and protection around the whole of your head. A properly fitting helmet should mean the pads contact every part of your head whilst remaining comfortable. The straps on your helmet should be checked before each use. Check for fraying edges and any rips or tears. The strap should keep the helmet secure during excessive movement whilst remaining comfortable. A properly fitting helmet should NOT be able to be removed from the head with the straps fastened.</p> <div data-bbox="614 795 901 952"> <p>Diagram A illustrates three helmet fitting scenarios. The first two are marked with a red 'X' and labeled 'INCORRECT'. The first shows the forehead exposed, and the second shows the helmet blocking the user's vision. The third is marked with a green checkmark and labeled 'CORRECT', showing a proper fit with the helmet covering the forehead and not blocking vision.</p> </div> <p>To adjust the position of the straps, hold one end of the chin buckle in one hand and slide the adjuster up or down the strap as necessary, to create a balanced and even "Y" shape underneath the ears.</p> <p>Adjust the tightness of the chinstrap accordingly. It should be tight enough that you can just slip a couple of fingers between the strap and the neck when fastened. Be VERY CAREFUL not to pinch the skin when closing the buckle. The helmet should be secure and not come off when moved back and fourth and side-to-side.</p> <p><b>CARE AND CLEANING</b></p> <p>Avoid leaving your helmet in excessive heat for long durations of time. Store in a cool/dry place. Only use a soft towel, soap and warm water to clean your helmet. You can remove and clean the comfort pads by hand and re-insert them after they air dry.</p> <p>A helmet has a limited lifespan in use and should be replaced when it shows obvious signs of wear or after 3 years.</p> <p>This helmet is in conformity with the regulation (EU) 2016/425 and Regulation 2016/425 on personal protective equipment as brought into UK law and amended Standard: EN 1078:2012+A1:2012</p> <p>Notified Body: Telefication B.V. with its office located at Wilmersdorf 50, 7327 AC Apeldoorn, The Netherlands. Notified Body No. 0560 ITS Testing Services(UK) Ltd., Centre Court, Meridian Business Park, Leicester LE19 1WD. UKCA AB0362</p> <p>GTS SPORTS CO., LIMITED Add: Yanjiang Industrial Zone Gekeng village, Hengli Town, Dongguan City, Guangdong Province, China. The EU and UK doc can be accessed from the link: <a href="http://www.haoshenghelmet.com">www.haoshenghelmet.com</a></p>
-------------	--



Page 10 of 12



**Test Report**

Number: SZHH01590174

Tests Conducted

Test line	
Impact sites #1	



Page 11 of 12



**Test Report**

Number: SZHH01590174

Tests Conducted



End of report

*The statements of conformity reported have considered the decision rule agreed, namely that Intertek have taken account of measurement uncertainty as calculated by Intertek, and applied according to ILAC-G8/09:2019 (Non-binary acceptance based on guard band  $w = U$ ) except designation from the customer, regulation or test specification. This decision rule only applies to the numeric test results.*

*The sample(s) and sample information hereto are provided by the client who shall be solely responsible for the authenticity and integrity thereof. The results shown in this report relate only to the sample(s) tested. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or wilful misconduct. This report shall not be reproduced unless with prior written approval from Intertek Testing Services Shenzhen Ltd.*



Page 12 of 12

