


NORDIC

WIXOM COLLECTION

Northern

WIDE PLANK

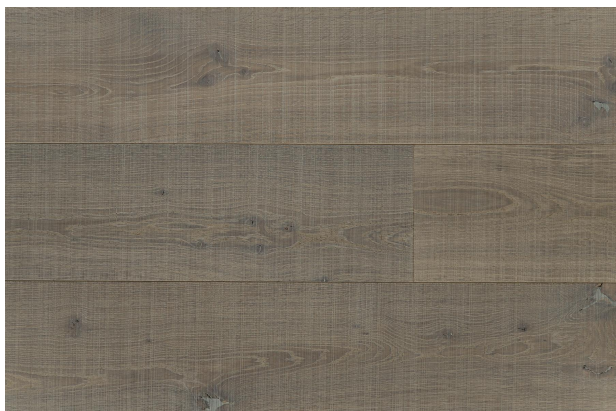

HANDCRAFTED, WIXOM SAWN PLANKS UNIQUE CROSS SAW KERF MARKINGS AND BALANCED CONTOURING CREATE AN EXCEPTIONAL SENSORY EXPERIENCE. COMBINING A RUGGED VINTAGE FEEL WITH A SMOOTH AND EXACTING FINISH, WIXOM SAWN PLANKS ARE IDEAL FOR ANY SETTING THAT REQUIRES AUTHENTIC CHARACTER.

SPECIFICATIONS

| | |
|-------------------------|--|
| MANUFACTURED: | MADE IN EUROPE |
| ORIGIN: | EUROPE |
| SPECIES: | EUROPEAN OAK |
| GRADE: | CHARACTER |
| SHADE: | GREY |
| SURFACE: | SAWN |
| EDGES: | MICROBEVELLED (PLANK - LONG SIDES ONLY) |
| THICKNESS: | 20 MM (3/4") |
| SUBSTRATE: | WBP BALTIC BIRCH PLYWOOD |
| FINISH: | HARDWAX OIL (UV CURED) |
| PLANK WIDTHS: | 180 MM / 220 MM / 260 MM (7-1/8" / 8-5/8" / 10-1/4") |
| PLANK LENGTHS: | 1950 MM / 2400 MM (76-3/4" / 94-1/2")** |
| | **WITH SOME NESTED LENGTHS |
| HERRINGBONE DIMENSIONS: | 120 MM X 600 MM (4-3/4" X 23-5/8") |
| CHEVRON DIMENSIONS: | 120 MM X 525 MM (4-3/4" X 20-11/16") |
| COLOUR VARIATION: | V3 - SUBSTANTIAL VARIATION |
| CERTIFICATIONS: | |



FSC® AVAILABLE UPON REQUEST

MAINTENANCE AND CARE

REFER TO NWP MAINTENANCE & CARE FOR HARDWAX OIL FINISHED WOOD FLOORS.

| PROCEDURE | RESIDENTIAL | COMMERCIAL |
|--------------------|---|--|
| Initial After Care | Optional application, NWP Specialty Hardwax Oil | Mandatory application, NWP Specialty Hardwax Oil |
| Regular cleaning | Vacuum, damp mop with NWP Floor Soap | Vacuum, damp mop with NWP Floor Soap (daily if required) |

INSTALLATION

| TYPE | RECOMMENDATION |
|-------------------------|---------------------------------------|
| Full Glue Down | Yes - Recommended |
| Nail Down | Yes - With Glue Assist |
| Floating | Not Recommended |
| Over Underfloor Heating | Yes - Refer to NWP Radiant Heat Guide |

*APPLICATIONS: Floors, Walls and Ceilings.
Stair Treads and Vents Also Available

TECHNICAL PERFORMANCE

ESSENTIAL CHARACTERISTICS PERFORMANCE

| | |
|----------------------------------|-----------------------|
| Reaction to fire | Cfl-s1 |
| Emission of Formaldehyde | E1 / CARB 2 compliant |
| Janka Hardness Rating | 1,120 lbf (4,980N) |
| Post Consumer Recycled Content % | 0 |