


**Declaration of Performance  
DoP-UK PL-en**

1. Product type: PL. Drywall screw for plasterboard. Bugle head. S-point.

2. Identification code:

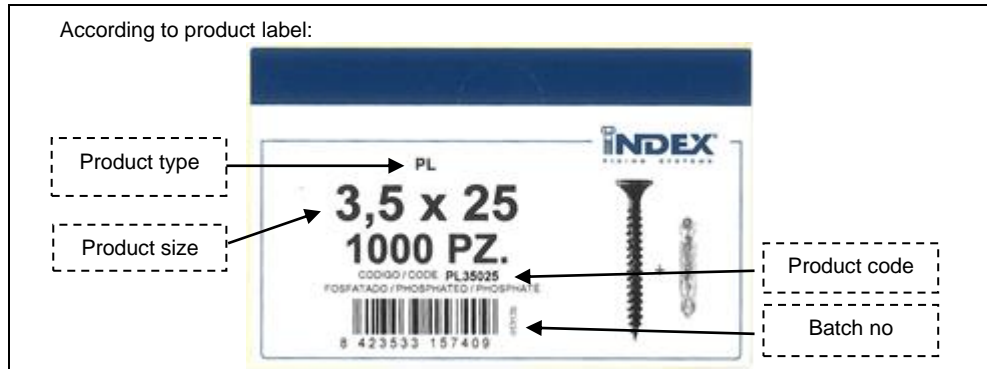

Product code	Diameter [mm]	Head Diam. [mm]	Length [mm]	Thread length [mm]	Covering
PL35019	3.40 - 3.60	7.80 – 8.20	17,95 – 20,05	Full Thread	Phosphated
PL35025			23,95 – 26,05		
PL35030			28,95 – 31,05		
PL35035			33,75 – 36,25		
PL35045			43,75 – 46,25		
PL35055			53,50 – 56,50		
PL39025	3.75 - 4.00	7.80 – 8.20	23,95 – 26,05	Full Thread	Phosphated
PL39035			33,75 – 36,25		
PL39045			43,75 – 46,25		
PL39055			53,50 – 56,50	50.0 – 52.0	
PL42070	4.05 - 4.30	7.80 – 8.20	68,50 – 71,50	50.0 – 52.0	Phosphated
PL42080			78,50 – 81,50		
PL48090	4.70 - 4.95	8.80 – 9.20	88,25 – 91,75	63.0 – 65.0	Phosphated
PL48100			98,25 – 101,75		
PL48110			108,25 – 111,75		
PL48120			118,25 – 121,75		
PL48130			128 – 132		

3. Intended use: To fix gypsum plasterboard, gypsum boards with fibrous reinforcement, products from secondary processing and suitable ancillary products to metal in building construction works.

4. Manufacturer: Index Fixing Systems. Técnicas Expansivas S.L.  
Segador, nº13  
26006 Logroño, La Rioja, SPAIN

5. Authorised representative: --

6. System of assessment of performance: 4

7. Designated standard: Laboratory: Técnicas Expansivas S.L.  
performed: Determination of product type  
under system: 4

8. UK technical assessment: No applicable


**9. Declared performance:**

	Essential characteristics	Performance	Designated technical specification
<b>9.1.</b>	Reaction to fire	A1	EN 14566:2008 + A1:2009
<b>9.2.</b>	Flexural strength	Passed	EN 14566:2008 + A1:2009

**10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.**

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed on behalf of the manufacturer by:



Santiago Reig. Technical manager  
Logroño, 15.02.2021