

AZUD spiral clean

AZUD SPIRAL CLEAN is the semiautomatic screen filter series for exclusive use for irrigation water filtration application, designed to ensure high filtration quality and low maintenance.



ADVANTAGES

- ✓ **Large screen area.**
Up to 1730 cm² (268 in²)
- ✓ **Filtration with screen filter element.**
The material of construction of the screen is stainless steel. Filtration degrees 100, 130 y 200 micron.
- ✓ **Non-stop working.** It is not necessary to stop filtrated water supply during the cleaning process.
- ✓ **Easy and effective cleaning.** The cleaning mechanism, consisting of a hand crank, scanner and suction nozzles, guarantees an efficient cleaning of the filter element without dismantling the filter.
- ✓ **Low maintenance.** No tools are needed.
- ✓ **Modularity, versatility, compatibility.** The system permits a wide range of possibilities with a minimal number of components.
- ✓ **Manufactured in technical plastic.**
- ✓ **Water and energy saving.**

TECHNOLOGY

AZUD SPIRAL CLEAN has a wide surface screen filtering element. Water flows OUT-IN through the filtering element while particles bigger than the filtration degree are trapped in the screen.

During the cleaning phase, the rotatory movement of the handle allows the rotation of the nozzles. The said nozzles suction the particles retained on the screen surface and discharge them through the drain valve.



AZUD spiral clean


AZUD SPIRAL CLEAN 130 micron	Maximum flow	Filtration area
		Screen
2N	30 m³/h	1300 cm²
	132 gpm	202 in²
2S	30 m³/h	1730 cm²
	132 gpm	268 in²
3N	50 m³/h	1730 cm²
	220 gpm	268 in²

Minimum pressure: 2 bar / 29 psi.
The flow rate given by filter conditions the frequency of the flushing activation.
Other filtration grades available www.azud.com

MATERIALS OF CONSTRUCTION

Housing	Polyamide reinforced with fiberglass
Filtering element	Stainless steel screen AISI 316
Locking system	Stainless steel
Sealing element	NBR

4 < pH < 11 • Maximum pressure 10 bar / 145 psi • Maximum temperature 60 °C / 140

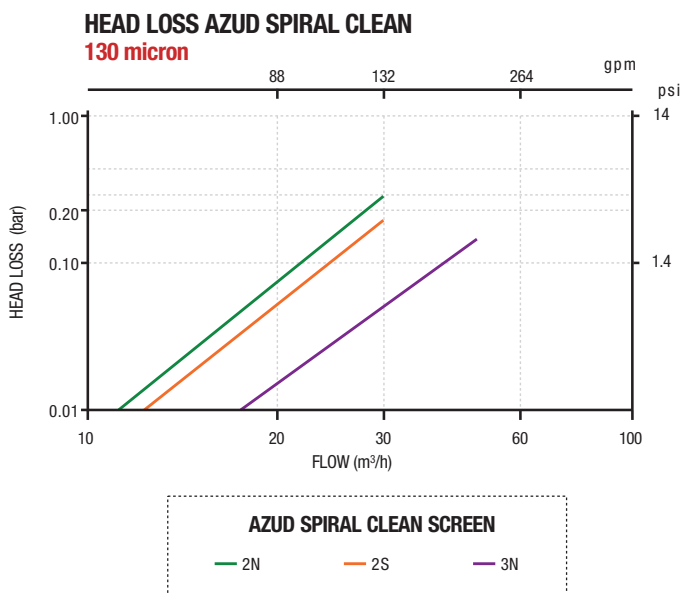

FILTER CONFIGURATION	Connection	Model	Connection		Dimensions					
			A	B	H ₁	H ₂	W	X ₁	X ₂	D
			mm	mm	mm	mm	mm	mm	mm	mm
	2"	2NR	BSP	BSP	875	935	310	270	330	212
		2NW	GROOVED	GROOVED	34.5"	36.9"	12.2"	10.7"	13.0"	8.3"
	2" Super	2SR	BSP	BSP	1000	1060	310	270	330	212
		2SW	GROOVED	GROOVED	39.4"	41.7"	12.2"	10.7"	13.0"	8.3"
3"	3NR	BSP	BSP	1015	1075	336	285	345	212	
	3NW	GROOVED	GROOVED	40.0"	42.4"	13.2"	11.3"	13.6"	8.3"	

Connection E 1 1/2" BSP • Connection M 1/4" BSP
 Body available in NPT thread.
 KIT DPI available. DPI: Device that indicates the differential of pressure in which the filter should be flushed.

