

AZUD FLUXAR

Hydraulic command valves that allow opening/closing the flow of irrigation water and/or regulating the operating conditions upstream or downstream

Technical characteristics

- **Material:** Metal/Plastic
- **Connection Diameter:** Ø3/4" - Ø1 2"
- **Connection Type:** Thread - Grooved - Flange
- **Nominal pressure:** PN6 - PN10 - PN16



Unique selling points



Robustness

Excellent performance under pressure variations and/or demanding conditions



Reliability

Régulation rapide, précise et stable, vérifiée et validée sur bancs d'essai



Efficiency

Allows operation at low pressure with very low head loss (Kv), reducing the energy consumption in the system



Technical data metal valves

Model	Connection diameter*		Kv m³/h (1 bar)	Connection type**	No. of holes	Nominal pressure***	Min. working pressure bar	Valve dimensions	
	mm	in						L mm	H mm
Metal	25	1"	16	BSP thread	-	PN6 PN16	0.5 - 0.8 1.2 - 1.5	120	45
	40	1 1/2"	51	BSP thread	-	PN6 PN16	0.5 - 0.8 1.2 - 1.5	170	65
	50	2"	72	BSP thread	-	PN6 PN16	0.5 - 0.8 1.2 - 1.5	186	75
				DIN 2502 Flange	4	PN6 PN16	0.5 - 0.8 1.2 - 1.5	120	45
	65	2 1/2"	74	BSP thread	-	PN6 PN16	0.5 - 0.8 1.2 - 1.5	205	90
				DIN 2502 Flange	4	PN6 PN16	0.5 - 0.8 1.2 - 1.5	202	185
	80C	3-2-3"	76	BSP thread	-	PN6 PN16	0.5 - 0.8 1.2 - 1.5	210	112
	80A	3"	158	BSP thread	-	PN6 PN16	0.5 - 0.8 1.2 - 1.5	242	112
				DIN 2502 Flange	8	PN6 PN16	0.5 - 0.8 1.2 - 1.5	250	205
	80D	3-4-3"	174	DIN 2502 Flange	8	PN6 PN16	0.5 - 0.8 1.2 - 1.5	280	205
	100	4"	208	DIN 2502 Flange	8	PN6 PN16	0.5 - 0.8 1.2 - 1.5	300	220
	125C	5-4-5"	229	DIN 2502 Flange	8	PN6 PN16	0.8 - 1.0 1.2 - 1.5	330	255
	125	5"	325	DIN 2502 Flange	8	PN6 PN16	0.8 - 1.0 1.2 - 1.5	330	255
	150	6"	494	DIN 2502 Flange	8	PN6 PN16	0.8 - 1.0 1.2 - 1.5	390	285
	200	8"	860	DIN 2502 Flange	12	PN6 PN16	0.8 - 1.0 1.2 - 1.5	475	343
				DIN 2576 Flange	8	PN6 PN16	0.8 - 1.0 1.2 - 1.5		
	250	10"	955	DIN 2502 Flange	12	PN6 PN16	0.8 - 1.0 1.2 - 1.5	500	405
				DIN 2576 Flange		PN6 PN16	0.8 - 1.0 1.2 - 1.5		
	300	12"	1900	DIN 2502 Flange	12	PN6 PN16	0.8 - 1.0 1.2 - 1.5	584	460
				DIN 2576 Flange		PN6 PN16	0.8 - 1.0 1.2 - 1.5		


*The X-X-X" designation corresponds to the connection-body-connection sequence.

**DIN 2576 Flange connection standard compatible with DIN 2502 up to and including 6" models.

In automated valves for filtration equipment (FL), the connection is DIN 2576 Flange.

***In automated valves, the maximum working pressure of the assembly will be limited by the component with the lowest pressure.

Head loss graph (Pressure vs Flow rate)

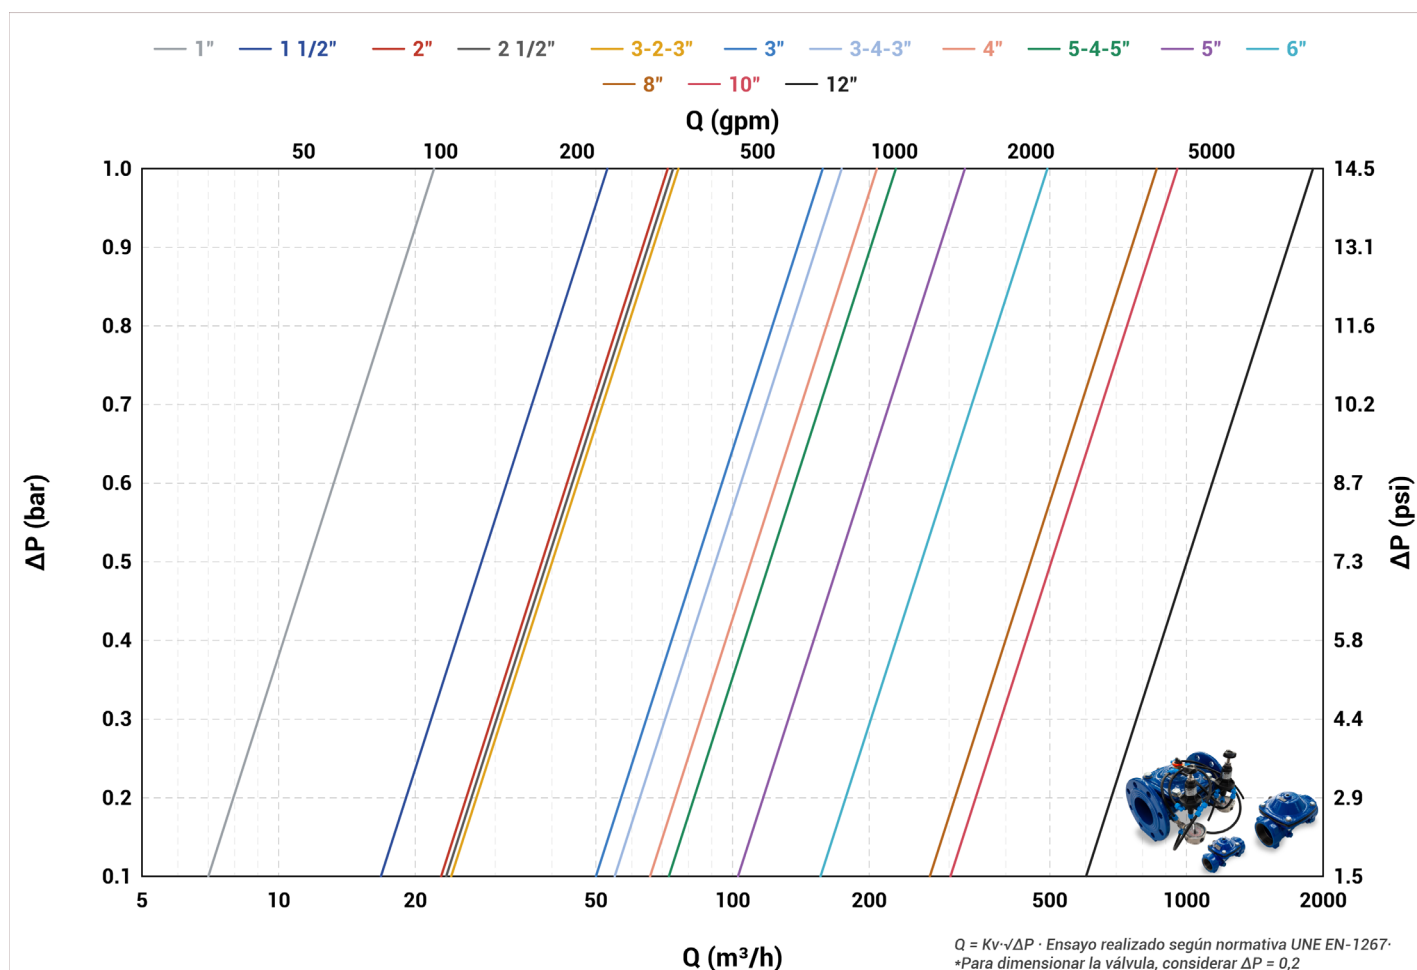

Technical data plastic valves



Model	Connection diameter*		Kv m³/h (1 bar)	Connection type	No. of holes	Nominal pressure**	Min. working pressure	Valve dimensions	
	mm	in					bar	L mm	H mm
Plastic	20	3/4"	13	BSP thread	-	PN6	0.5 - 0.8	136	72
						PN10	1.2 - 1.5		
	25	1"	15	BSP thread	-	PN6	0.5 - 0.8	148	73.5
						PN10	1.2 - 1.5		
	40	1 1/2"	45	BSP thread	-	PN6	0.5 - 0.8	200	101
						PN10	1.2 - 1.5		
	50	2"	60	BSP thread	-	PN6	0.5 - 0.8	215	113.5
						PN10	1.2 - 1.5		
			60	DIN/ANSI Flange	4	PN6	0.5 - 0.8	210	165
						PN10	1.2 - 1.5		
	50	2"	50	Grooved	-	PN6	0.5 - 0.8	210	165
						PN10	1.2 - 1.5		
	65	2 1/2"	64	BSP thread	-	PN6	0.5 - 0.8	238	120.5
						PN10	1.2 - 1.5		
				DIN/ANSI Flange	4	PN6	0.5 - 0.8	213	185
						PN10	1.2 - 1.5		
	80C	3-2-3"	66	BSP thread	-	PN6	0.5 - 0.8	255	130
						PN10	1.2 - 1.5		

(Continues on next page)




Technical data plastic valves

Model	Connection diameter*		Kv m³/h (1 bar)	Connection type	No. of holes	Nominal pressure**	Min. working pressure	Valve dimensions	
	mm	in					bar	L mm	H mm
	80D	3-4-3"	130	BSP thread	-	PN6	0.5 - 0.8	365	142.5
						PN10	1.2 - 1.5		
				DIN/ANSI Flange	8	PN6	0.5 - 0.8	345	200
						PN10	1.2 - 1.5		
				Grooved	-	PN6	0.5 - 0.8	345	200
						PN10	1.2 - 1.5		
	100	4"	170	BSP thread	-	PN6	0.5 - 0.8	375	186.5
						PN10	1.2 - 1.5		
				DIN/ANSI Flange	8	PN6	0.5 - 0.8	370	220
						PN10	1.2 - 1.5		
				Grooved	-	PN6	0.5 - 0.8	370	220
						PN10	1.2 - 1.5		

*The X-X-X" designation corresponds to the connection-body-connection sequence.

**In automated valves, the maximum working pressure of the assembly will be limited by the component with the lowest pressure.

Head loss graph (Pressure vs Flow rate)

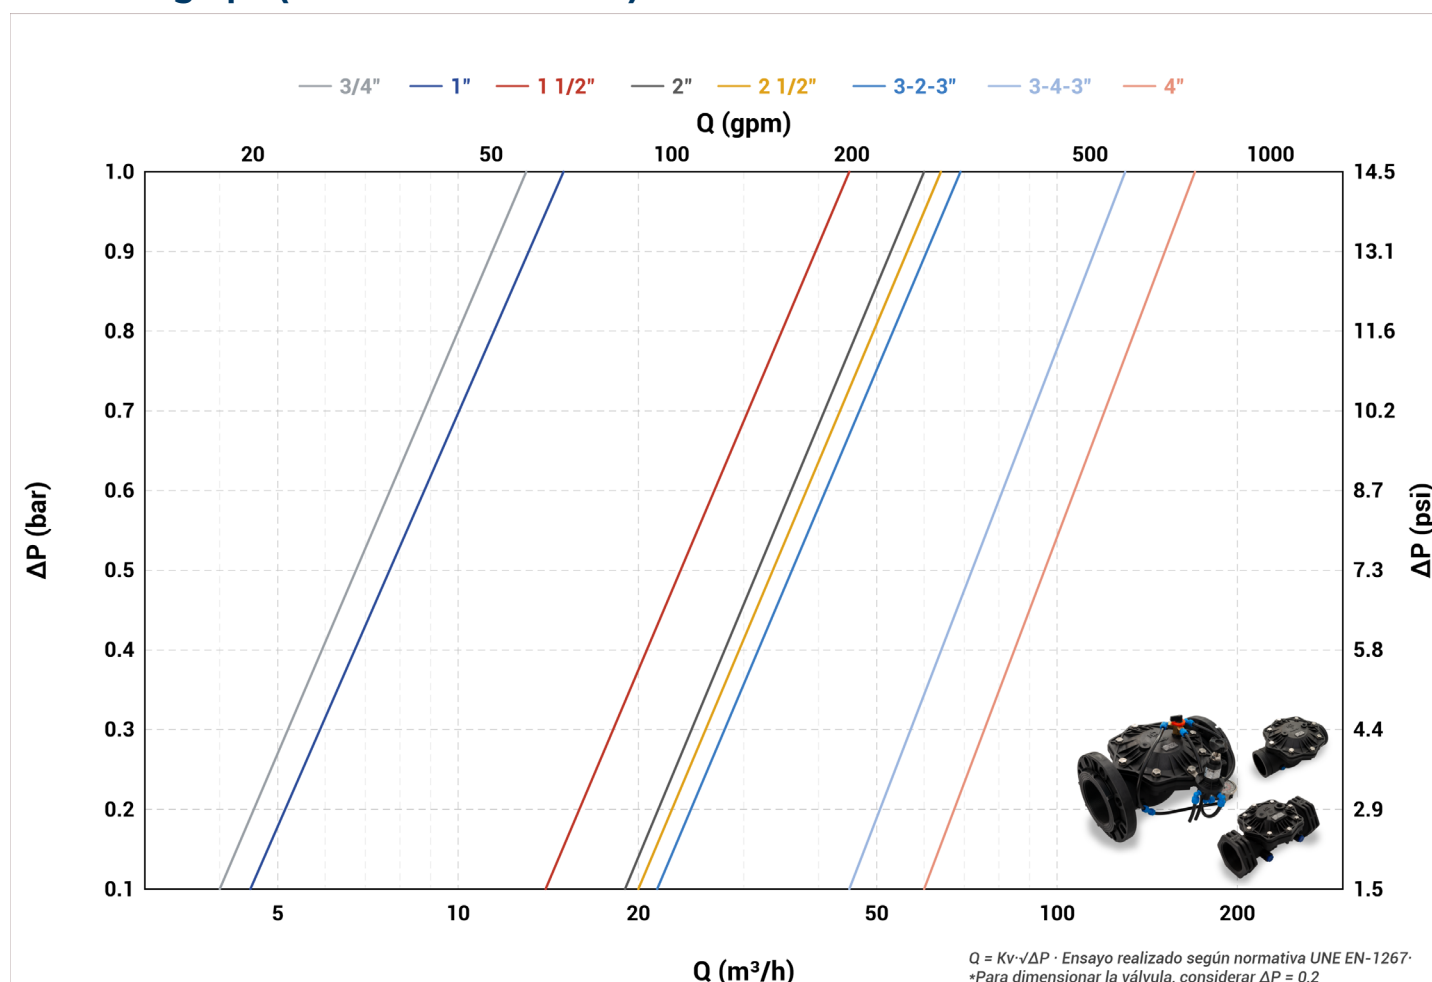

Automations

Automation	Solenoid	Nominal pilot pressure	Pilot operating range
		bar	bar
Reducing hydraulic valve (RD)	-	6 10	0.9 - 5.2 1.5 - 7.5
Sustaining hydraulic valve (ST)	-	6 10	0.9 - 5.2 1.5 - 7.5
Electrovalve (EV)	12 V DC LATCH	-	-
	24 V AC NO		
Reducing electrovalve (EV-RD)	12 V DC LATCH	6	0.9 - 5.2
	24 V AC NO	10	1.5 - 7.5
Sustaining electrovalve (EV-ST)	12 V DC LATCH	6	0.9 - 5.2
	24 V AC NO	10	1.5 - 7.5
Sustaining valve kit for filtration equipment (FL)	12 V DC LATCH	6	0.9 - 5.2
	24 V AC NC		
	24 V DC NC		

Materials of construction:

Model	Metal	Plastic
Base-lid	Ductile cast iron with anti-corrosion epoxy (GGG50)*	Glass fiber reinforced nylon
Membrane	Natural rubber + Nylon	Natural rubber + Nylon
Spring	302 Stainless steel	302 Stainless steel
Screws	Galvanized	A2-70 Stainless steel
Pilot regulating	Glass fiber reinforced engineering plastic	Glass fiber reinforced engineering plastic

*Models model Ø1" y Ø1½" manufactured in grey cast iron (GG25) with anti-corrosion epoxy-polyester coating.

Related products



AZUD VORA




AZUD HELIX AUTOMATIC 200




AZUD META

