


## Maximum safety and easy installation. SAFETY WITHOUT RINGS.

- ▶ Labour saving.
- ▶ Saving on installation costs.
- ▶ Quick installation.
- ▶ It allows the mechanical extension and collection of the dripline.
- ▶ Safety under extreme working conditions.
- ▶ Maximum resistance to working pressure. Operating pressure: 0 to 4 bar (0 to 58 psi).
- ▶ Resistance to most of the products normally used in agriculture.



### EASY INSTALLATION

Special design that makes the first insertion between dripline and fitting fast and easy.

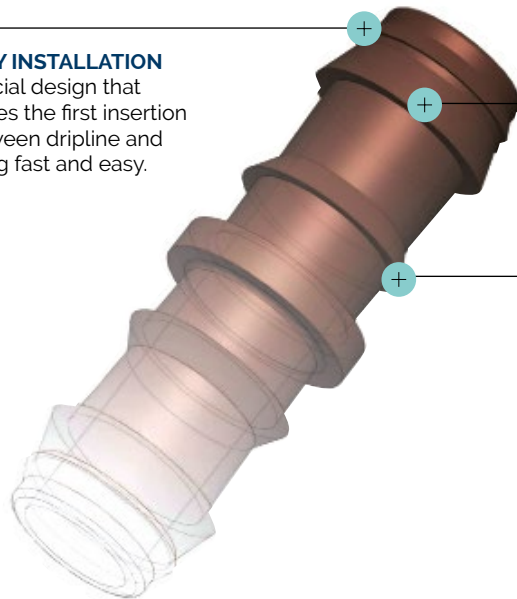


### SAFETY

This barb secures the fitting to the dripline avoiding disconnections.

### WATER-TIGHTNESS

The perfect combination of these barbs guarantees a higher water-tightness in microirrigation fittings applications.

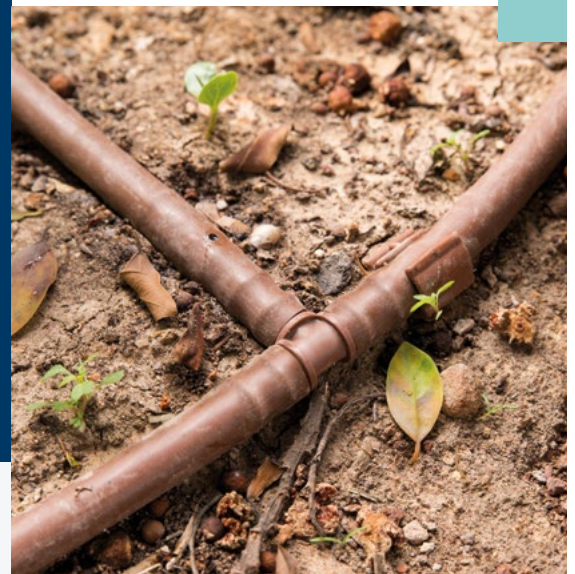

## + Applications






### For agriculture:

- ▶ Irrigation installations where safety in the maintenance of work conditions is the most important factor.
- ▶ Irrigation areas on terraces or with abrupt topography.
- ▶ Subsurface drip irrigation

### For gardening:

- ▶ Sectors with mixed irrigation, where emitters and micro-sprinklers are placed.
- ▶ Green areas. Leisure and sport areas.
- ▶ Installations with variations in hydraulic work conditions.
- ▶ Green areas with subsurface drip irrigation.

## + Technical Data

AZUD FIT PLUS fittings		Model	un/box
	Straight connector	16	1800
		17	1800
		20	1000
	*Offtake connector for grommet (L)	16	2400
		20	700
	**Offtake connector with L grommet	16	800
		20	600
	**L grommet	L	1200
	Offtake connector for grommet (XL/B)	16	800
		20	600
	***Offtake connector with XL grommet	16	1100
		20	800
	***XL grommet	XL	1200
	**Offtake connector with B grommet	16	1000
	**B grommet	B	1200
	L-offtake connector	16	600
	***L-offtake connector with XL grommet	16	400
	T-connector	16	800
	L-connector	16	600
	Cross connector	16	500
	Mixed connector	16 - 1/2"	600
		16 - 3/4"	1000
	T-male thread connector	16 - 1/2"	750
		16 - 3/4"	600
	L-male thread connector	16 - 1/2"	600
		16 - 3/4"	1000
	Plug ring	16 RD	2000
		20 RD	1600
	Subjection pick	16	250

\*Punch with extractor Ø7  
 \*\*PVC, HDPE drill Ø16  
 \*\*\*PVC drill Ø16,5, HDPE drill Ø16

\* SISTEMA AZUD, S.A reserves the right to change the characteristics of these products without prior notice.