

Model Name: P215HAN01.1

Issue Date: 2023/3/1

() Preliminary Specifications



(*) Final Specifications

Customer Signature	Date	AUO Display Plus	Date
Approved By 		Approval by PM Director CT Wu 	
Note 		Reviewed by RD Director Lamy Chen 	
		Reviewed by Project Leader Wallace Ting 	
		Prepared by PM Sophie Teng 	

Contents

1 Handling Precautions	4
2 General Description	5
2.1 Display Characteristics	5
2.2 Absolute Maximum Rating of Environment.....	5
2.3 Optical Characteristics	7
2.4 Mechanical Characteristics	11
TFT-LCD Module	12
3.1 Block Diagram	12
3.2 Interface Connection	13
3.2.1 Connector Type.....	13
3.2.2 Connector Pin Assignment	13
3.3 Electrical Characteristics	15
3.3.1 Absolute Maximum Rating	15
3.3.2 Recommended Operating Condition	15
3.4 Signal Characteristics	16
3.4.1 LCD Pixel Format.....	16
3.4.2 LVDS Data Format.....	16
3.4.3 Color versus Input Data.....	17
3.4.4 LVDS Specification	18
3.4.5 Input Timing Specification	20
3.5 Power ON/OFF Sequence	22
4 Backlight Unit	23
4.1 Block Diagram	23
4.2 Interface Connection	24
4.2.1 Connector Type.....	24
4.2.2 Connector Pin Assignment	24
4.3 Electrical Characteristics	25
4.3.1 Absolute Maximum Rating	25
4.3.2 Recommended Operating Condition	25
5 Reliability Test	27
6 Shipping Label	27
Definition of Label	28
7 Mechanical Characteristics	29
8 Packing Specification	31
8.1 Packing Flow	31
8.2 Pallet and shipment information.....	32
9 Design Guide for System	33

Record of Revision

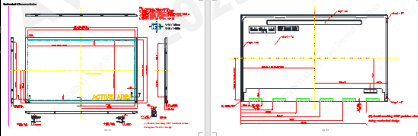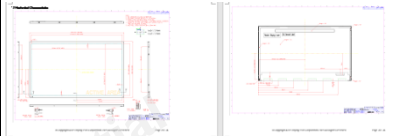Version	Date	Page	Old description	New Description	Remark																								
I.0	2018/02/12		Final spec. Rev 1.0 Released																										
I.1	2020/11/17	29	The label is on the panel as shown below: (Example)-  Note 4-1: For Pb Free products, we will add  for identification. Note 4-2: For RoHS compatible products, we will add  for identification. Note 4-3: For China RoHS compatible products, Qids will add  for identification. Note 4-4: The Green Mark will be presented only when the green documents have been ready by Qids Internal Green Team.	Update packing based on Label EC * 4 Shipping Label: The label is on the panel as shown below: (Example)-  (1) For Pb Free Product, ADP will add  for identification. (2) For RoHS compatible products, ADP will add  for identification. (3) For Cadmium Free product, ADP will add  for identification. (4) Note: The green Mark will be present only when the green documents have been ready by ADP internal green team. (Definition of green design follows the ADP green design checklist.)																									
1.2	2021/8/13	24	4.2 Interface Connection- 4.2.1 Connector Type- <table><tr><td>Backlight Connector-</td><td>Manufacturer-</td><td>ENTERY-</td></tr><tr><td></td><td>Part Number-</td><td>3707K-S06N-21R-</td></tr><tr><td>Mating Connector-</td><td>Manufacturer-</td><td>Cvilux-</td></tr><tr><td></td><td>Part Number-</td><td>C11406SL000-NH (Locking type)-</td></tr></table>	Backlight Connector-	Manufacturer-	ENTERY-		Part Number-	3707K-S06N-21R-	Mating Connector-	Manufacturer-	Cvilux-		Part Number-	C11406SL000-NH (Locking type)-	Update LED connector type <table><tr><td>Backlight Connector-</td><td>Manufacturer-</td><td>CVILUX-</td></tr><tr><td></td><td>Part Number-</td><td>C11406M1HRN-NH1-</td></tr><tr><td>Mating Connector-</td><td>Manufacturer-</td><td>CVILUX or Compatible-</td></tr><tr><td></td><td>Part Number-</td><td>C11406SL000-NH (Lock)-</td></tr></table>	Backlight Connector-	Manufacturer-	CVILUX-		Part Number-	C11406M1HRN-NH1-	Mating Connector-	Manufacturer-	CVILUX or Compatible-		Part Number-	C11406SL000-NH (Lock)-	
Backlight Connector-	Manufacturer-	ENTERY-																											
	Part Number-	3707K-S06N-21R-																											
Mating Connector-	Manufacturer-	Cvilux-																											
	Part Number-	C11406SL000-NH (Locking type)-																											
Backlight Connector-	Manufacturer-	CVILUX-																											
	Part Number-	C11406M1HRN-NH1-																											
Mating Connector-	Manufacturer-	CVILUX or Compatible-																											
	Part Number-	C11406SL000-NH (Lock)-																											
		29 30		Update module drawing which add ADP logo 																									
I.3	2023/03/01	P28	Shipping label Definition of Label:-   (1) For Pb Free Product, ADP will add  for identification. (2) For RoHS compatible products, ADP will add  for identification. (3) For Cadmium Free product, ADP will add  for identification. (4) Note: The green Mark will be present only when the green documents have been ready by ADP internal green team. (Definition of green design follows the ADP green design checklist.) B. Carton Label:- 	Label EC  (1) For Pb Free Product, ADP will add  for identification. (2) For RoHS compatible products, ADP will add  for identification. (3) For Cadmium Free product, ADP will add  for identification. (4) Note: The green Mark will be present only when the green documents have been ready by ADP internal green team. (Definition of green design follows the ADP green design checklist.) B. Carton Label:- 																									

I Handling Precautions

- 1) Since polarizer is easily damaged, do not touch or press the surface of polarizer with hand.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open or modify the Module Assembly.
- 8) Do not press the reflector sheet at the back of the module to any directions.
- 9) In case a TFT-LCD Module has to be put back into the packing container slot after once it was taken out from the container, do not press the center of the LED lightbar edge. Otherwise the TFT-LCD Module may be damaged.
- 10) Insert or pull out the interface connector, be sure not to rotate nor tilt it of the TFT-LCD Module.
- 11) Do not twist nor bend the TFT -LCD Module even momentary. It should be taken into consideration that no bending/twisting forces are applied to the TFT-LCD Module from outside. Otherwise the TFT-LCD Module may be damaged.
- 12) Please avoid touching COF position while you are doing mechanical design.
- 13) When storing modules as spares for a long time, the following precaution is necessary: Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35 °C at normal humidity.
- 14) Do not apply the same pattern for a long time, it will enhance relevant defect.

2 General Description

This specification applies to the 21.5 inch wide Color a-Si TFT-LCD Module P215HAN01.1. The display supports the Full HD - 1920(H) × 1080(V) screen format and 16.7M colors (8 bits RGB data input). The input interface is Dual channel LVDS and this module doesn't contain an driver board for backlight.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

ITEMS	Unit	SPECIFICATIONS
Screen Diagonal	[mm]	546.86 (21.5")
Active Area	[mm]	476.064 (H) × 267.786 (V)
Pixels H × V	-	1920(x3) × 1080
Pixel Pitch	[um]	247.95 (per one triad) ×247.95
Pixel Arrangement	-	R.G.B. Vertical Stripe
Display Mode	-	AHVA Mode, Normally Black
White Luminance (Center)	[cd/m ²]	250 (Typ.)
Contrast Ratio	-	1000 (Typ.)
Response Time	[msec]	14 (Typ., GTG)
Power Consumption (LCD Module + Backligh unit)	[Watt]	11.4 (Typ.) LCD module : PDD (Typ.)= 2.3 @ White pattern,Fv=60Hz Backlight unit : P _{BLU} (Typ.) =9.1 @Is= 65 mA
Weight	[Grams]	1740
Outline Dimension	[mm]	497.6(H) × 292.2(V) ×10.5 (D) Typ
Electrical Interface	-	Dual channel LVDS , 8 bits RGB data input
Support Color	-	16.7M colors
Surface Treatment	-	Anti-Glare, 3H
Temperature Range		
Operating	[°C]	0 to +50
Storage (Shipping)	[°C]	-20 to +60
RoHS Compliance	-	RoHS Compliance
TCO Compliance	-	TCO 7.0 Compliance


2.2 Absolute Maximum Rating of Environment

Permanent damage may occur if exceeding the following maximum rating.

Symbol	Description	Min.	Max.	Unit	Remark
TOP	Operating Temperature	0	+50	[°C]	Note 2-1
TGS	Glass surface temperature (operation)	0	+65	[°C]	Note 2-1 Function judged only
HOP	Operation Humidity	5	90	[%RH]	Note 2-1
TST	Storage Temperature	-20	+60	[°C]	
HST	Storage Humidity	5	90	[%RH]	

Note 2-1: Temperature and relative humidity range are shown as the below figure.


1. 90% RH Max ($T_a \leq 39^\circ\text{C}$)
2. Max wet-bulb temperature at 39°C or less. ($T_a \leq 39^\circ\text{C}$)
3. No condensation

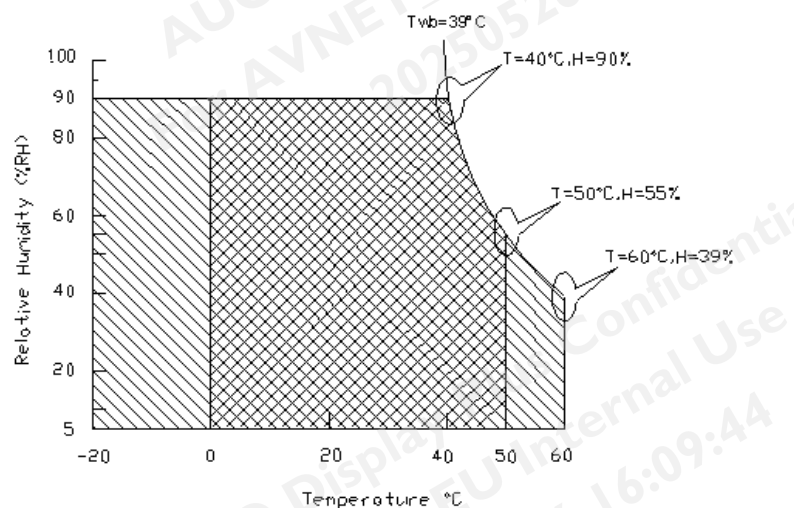

Operating Range



Storage Range



2.3 Optical Characteristics


The optical characteristics are measured on the following test condition.

Test Condition:

1. Equipment setup: Please refer to **Note 2-2**.
2. Panel Lighting time: 30 minutes
3. VDD=5.0V, Fv=60Hz, Is= 65 mA, Ta=25 °C

Symbol	Description		Min.	Typ.	Max.	Unit	Remark
L_w	White Luminance (Center of screen)		200	250	-	[cd/m ²]	Note 2-2 By SR-3
L_{uni}	Luminance Uniformity (9 points)		75	80	-	[%]	Note 2-3 By SR-3
CR	Contrast Ratio (Center of screen)		600	1000	-	-	Note 2-4 By SR-3
θ_R	Horizontal Viewing Angle (CR=10)	Right	80	89	-	[degree]	Note 2-5 By SR-3
θ_L		Left	80	89	-		
Φ_H	Vertical Viewing Angle (CR=10)	Up	80	89	-		
Φ_L		Down	80	89	-		
θ_R	Horizontal Viewing Angle (CR=5)	Right	80	89	-		
θ_L		Left	80	89	-		
Φ_H	Vertical Viewing Angle (CR=5)	Up	80	89	-		
Φ_L		Down	80	89	-		
T_{GTG}	Response Time	Gray To Gray	-	14	-	[msec]	Note 2-6 By TRD-100
R_x	Color Coordinates (CIE 1931)	Red x	0.617	0.647	0.677	-	By SR-3
R_y		Red y	0.304	0.334	0.364		
G_x		Green x	0.290	0.320	0.350		
G_y		Green y	0.595	0.625	0.655		
B_x		Blue x	0.125	0.155	0.185		
B_y		Blue y	0.020	0.050	0.080		
W_x		White x	0.283	0.313	0.343		
W_y		White y	0.299	0.329	0.359		
CT	Crosstalk		-	-	1.5	[%]	Note 2-7 By SR-3

Note 2-2: Equipment setup :

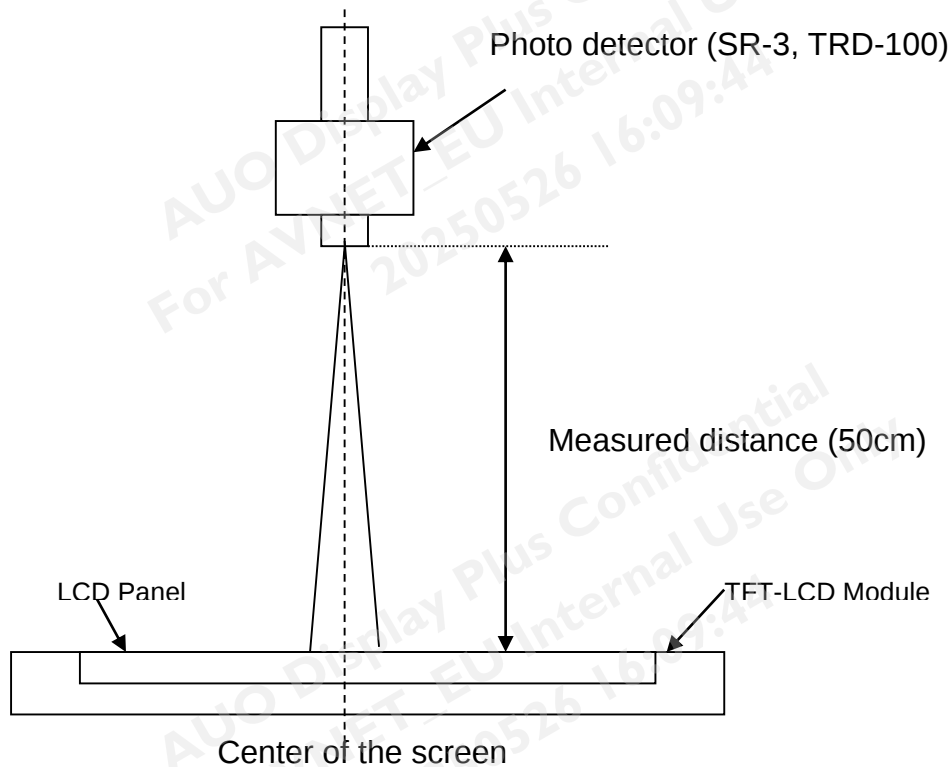


Note 2-3: Luminance Uniformity Measurement

Definition:

$$\text{Luminance Uniformity} = \frac{\text{Minimum Luminance of 9 Points (P1 ~ P9)}}{\text{Maximum Luminance of 9 Points (P1 ~ P9)}}$$

a. Test pattern: White Pattern

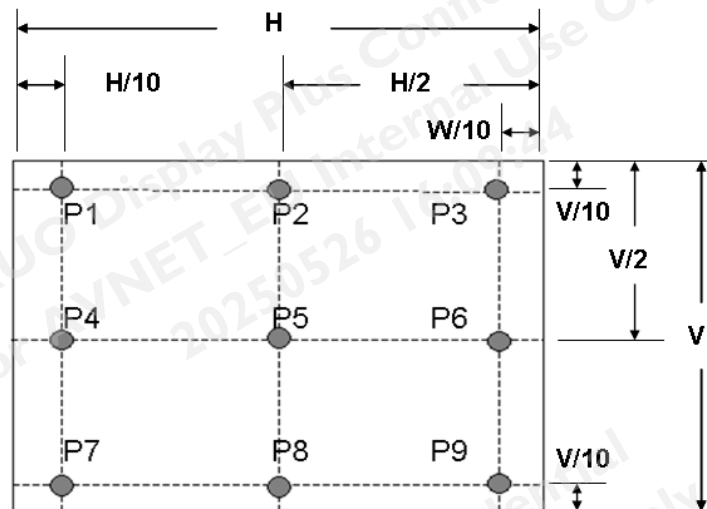

Note 2-4: Contrast Ratio Measurement

Definition:

$$\text{Contrast Ratio} = \frac{\text{Luminance of White pattern}}{\text{Luminance of Black pattern}}$$


- a. Measured position: Center of screen (P5) & perpendicular to the screen ($\theta = \Phi = 0^\circ$)

Note 2-5: Viewing angle measurement

Definition: The angle at which the contrast ratio is greater than 10 & 5 .

- a. Horizontal view angle: Divide to left & right (θ_L & θ_R)

Vertical view angle: Divide to up & down (Φ_H & Φ_L)

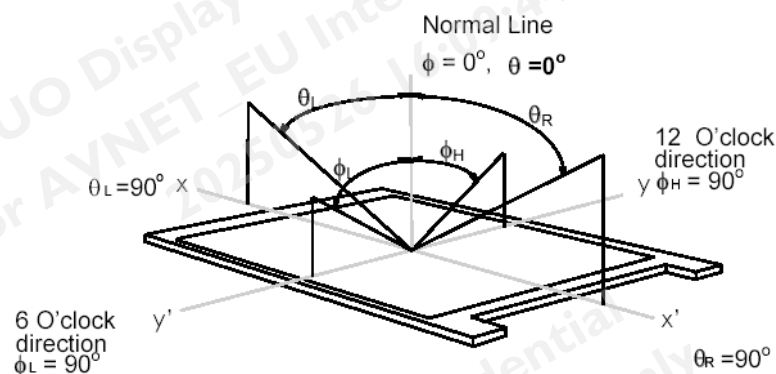


Note 2-6: Response measurement

The output signals of photo detector are measured when the input signals are changed from “Gray

time

level A" to "Gray level B" (falling time, T_f), and from "Gray level B" to "Gray level A" (rising time, T_r), respectively. The response time is interval between the 10% and 90% of optical response.

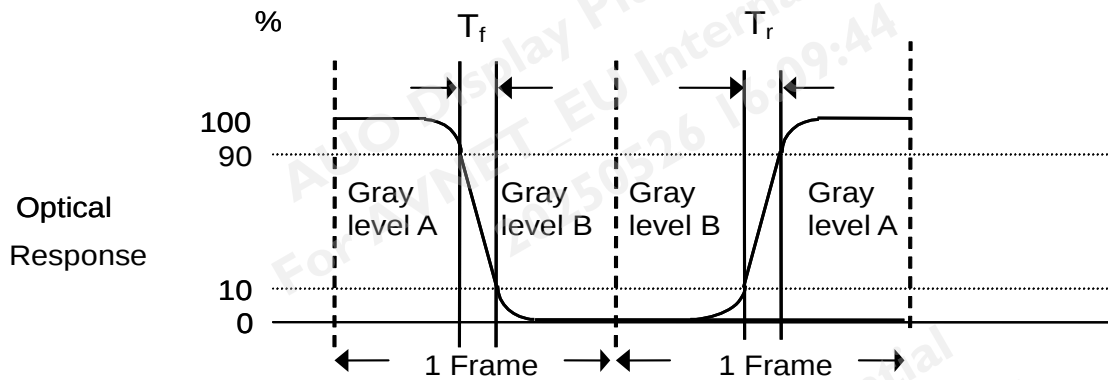

The gray to gray response time is defined as the following table.

Gray Level to Gray Level		Target gray level				
		L0	L63	L127	L191	L255
Start gray level	L0					
	L63					
	L127					
	L191					
	L255					

■ T_{GTG_typ} is the total average time at rising time and falling time of gray to gray.

Note 2-7: Crosstalk measurement

Definition:

$$CT = \text{Max. } (CT_H, CT_V);$$

Where

a. Maximum Horizontal Crosstalk :


$$CT_H = \text{Max. } (|Y_{BL} - Y_{AL}| / Y_{AL} \times 100 \%, |Y_{BR} - Y_{AR}| / Y_{AR} \times 100 \%);$$

Maximum Vertical Crosstalk:

$$CT_V = \text{Max. } (|Y_{BU} - Y_{AU}| / Y_{AU} \times 100 \%, |Y_{BD} - Y_{AD}| / Y_{AD} \times 100 \%);$$

b. Y_{AU} , Y_{AD} , Y_{AL} , Y_{AR} = Luminance of measured location without Black pattern

Y_{BU} , Y_{BD} , Y_{BL} , Y_{BR} = Luminance of measured location with Black pattern

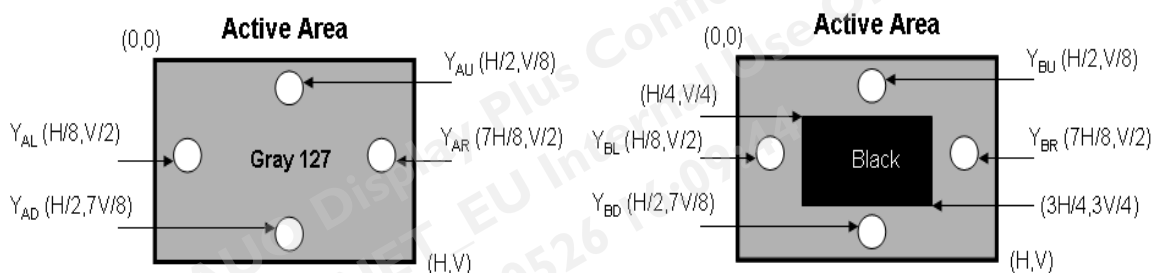

2.4 Mechanical Characteristics


Symbol	Description	Min.	Max.	Unit	Remark
P _{bc}	Backside Compression	2.5	-	[Kgf]	Note 2-8

Note 2-8: Test Method:

The point is at a distance from right-downside 25mm x 25mm defined as the Start Point of Measure Points, and the point is at a distance 25mm from left-side & around 10mm from PCB defined as the End Point.

Align 50mm x 50mm block from Start Point on the Bezel Back, and the corners of each block are Measure Points.


If the distance from the last block to each side of the End Point $\geq 25\text{mm}$, add other blocks to make sure that most area of Bezel Back can be measured.

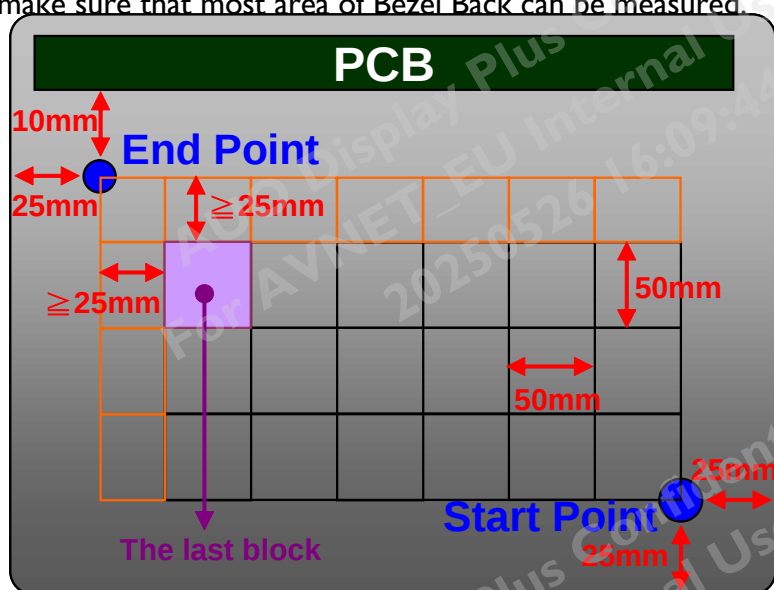

TFT-LCD Module

3.1 Block Diagram

The following shows the block diagram of the 21.5 inch Color TFT-LCD Module.

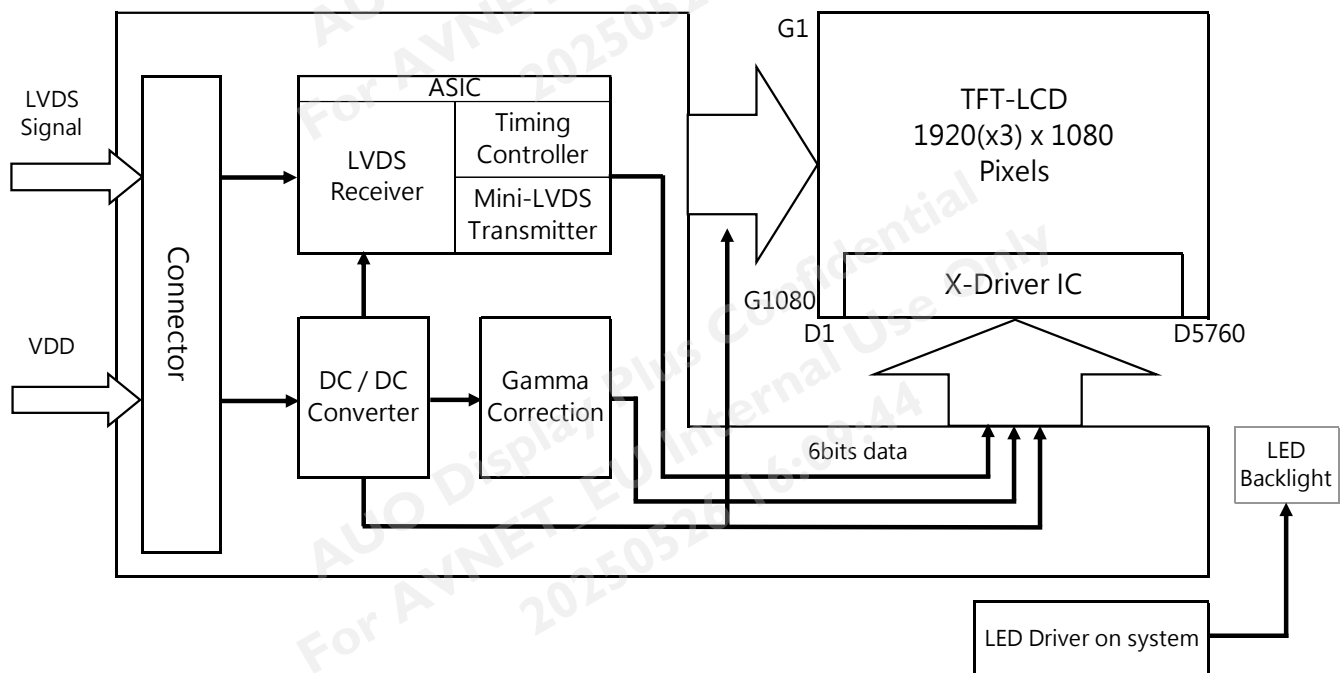

3.2 Interface Connection


3.2.1 Connector Type

TFT-LCD Connector	Manufacturer	P-TWO	STM
	Part Number	I87034-3009	MSBKT2407P30HB
Mating Connector	Manufacturer	JAE	
	Part Number	FI-X30H (Unlocked Type)	

3.2.2 Connector Pin Assignment

PIN #	Symbol	Description	Remark
1	RxO0-	Negative LVDS differential data input (Odd data)	
2	RxO0+	Positive LVDS differential data input (Odd data)	
3	RxO1-	Negative LVDS differential data input (Odd data)	
4	RxO1+	Positive LVDS differential data input (Odd data)	
5	RxO2-	Negative LVDS differential data input (Odd data)	
6	RxO2+	Positive LVDS differential data input (Odd data)	
7	GND	Ground	
8	RxOCLK-	Negative LVDS differential clock input (Odd clock)	
9	RxOCLK+	Positive LVDS differential clock input (Odd clock)	
10	RxO3-	Negative LVDS differential data input (Odd data)	
11	RxO3+	Positive LVDS differential data input (Odd data)	
12	RxE0-	Negative LVDS differential data input (Even data)	
13	RxE0+	Positive LVDS differential data input (Even data)	
14	GND	Ground	
15	RxE1-	Negative LVDS differential data input (Even data)	
16	RxE1+	Positive LVDS differential data input (Even data)	
17	GND	Ground	
18	RxE2-	Negative LVDS differential data input (Even data)	
19	RxE2+	Positive LVDS differential data input (Even data)	
20	RxECLK-	Negative LVDS differential clock input (Even clock)	
21	RxECLK+	Positive LVDS differential clock input (Even clock)	
22	RxE3-	Negative LVDS differential data input (Even data)	
23	RxE3+	Positive LVDS differential data input (Even data)	
24	GND	Ground	
25	NC	No connection (for ADP test only. Do not connect)	

26	NC	No connection (for ADP test only. Do not connect)	
27	NC	No connection (for ADP test only. Do not connect)	
28	VDD	Power Supply Input Voltage	
29	VDD	Power Supply Input Voltage	
30	VDD	Power Supply Input Voltage	

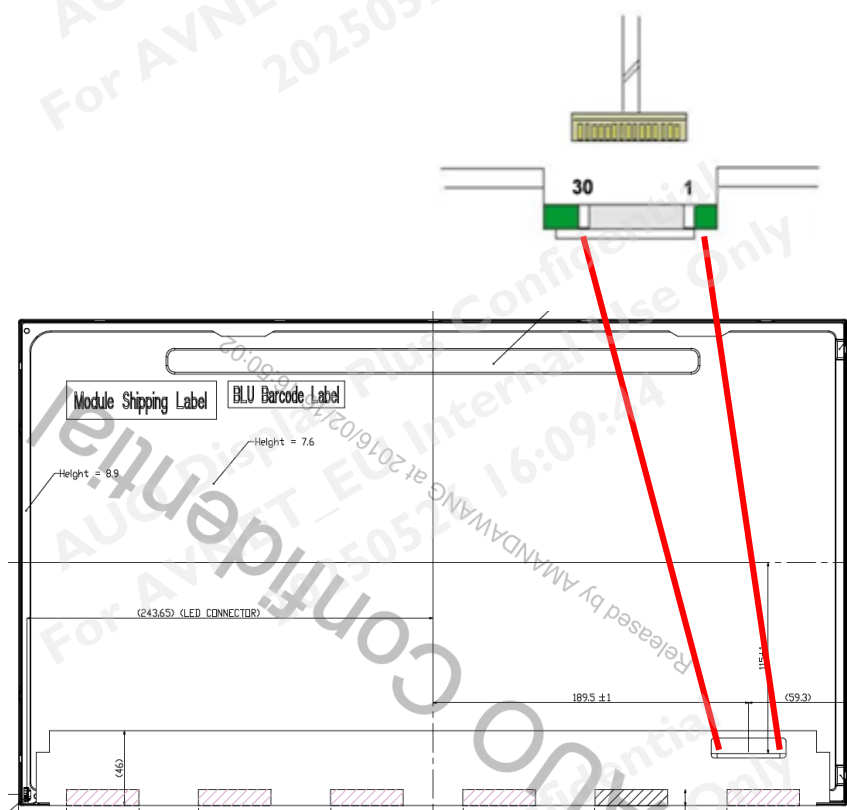

3.3 Electrical Characteristics

3.3.1 Absolute Maximum Rating

Permanent damage may occur if exceeding the following maximum rating.



Symbol	Description	Min	Max	Unit	Remark
VDD	Power Supply Input Voltage	GND-0.3	6.0	[Volt]	Ta=25°C

3.3.2 Recommended Operating Condition

Symbol	Description	Min	Typ	Max	Unit	Remark
VDD	Power supply Input voltage	4.5	5.0	5.5	[Volt]	
IDD	Power supply Input Current (RMS)	-	0.46	0.55	[A]	VDD= 5.0V, White Pattern, Fv=60Hz
			0.50	0.60	[A]	VDD= 5.0V, White Pattern, Fv=75Hz
PDD	VDD Power Consumption	-	2.30	2.75	[Watt]	VDD= 5.0V, White Pattern, Fv=60Hz
			2.50	3.00	[Watt]	VDD= 5.0V, White Pattern, Fv=75Hz
IRush	Inrush Current	-	-	3.0	[A]	Note 3-1
VDDrp	Allowable VDD Ripple Voltage	-	-	500	[mV]	VDD= 5.0V, White Pattern, Fv=75Hz

Note 3-1: Inrush Current measurement:


Test circuit:

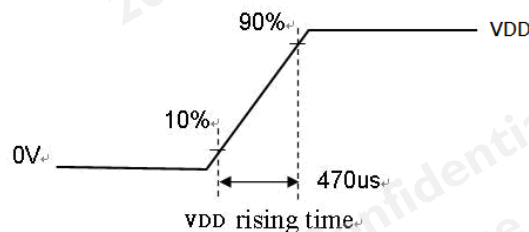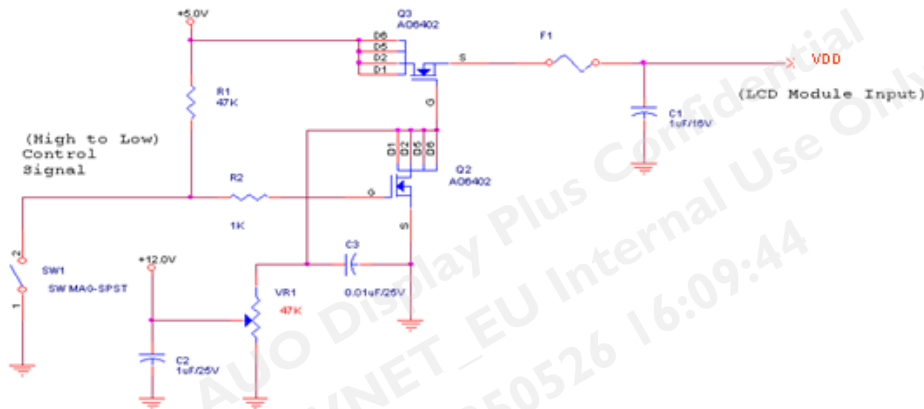


The duration of VDD rising time: 470us.

3.4 Signal Characteristics

3.4.1 LCD Pixel Format

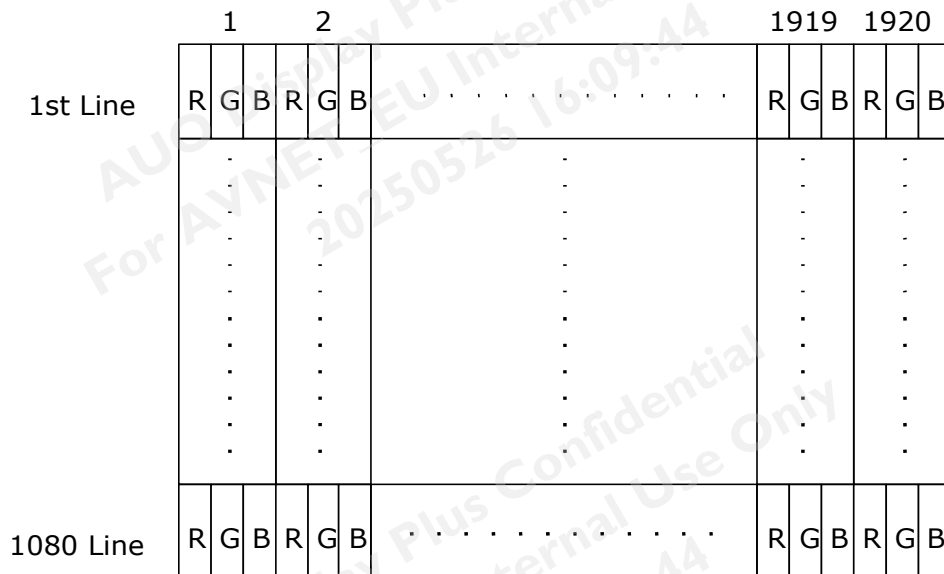

3.4.2 LVDS Data Format

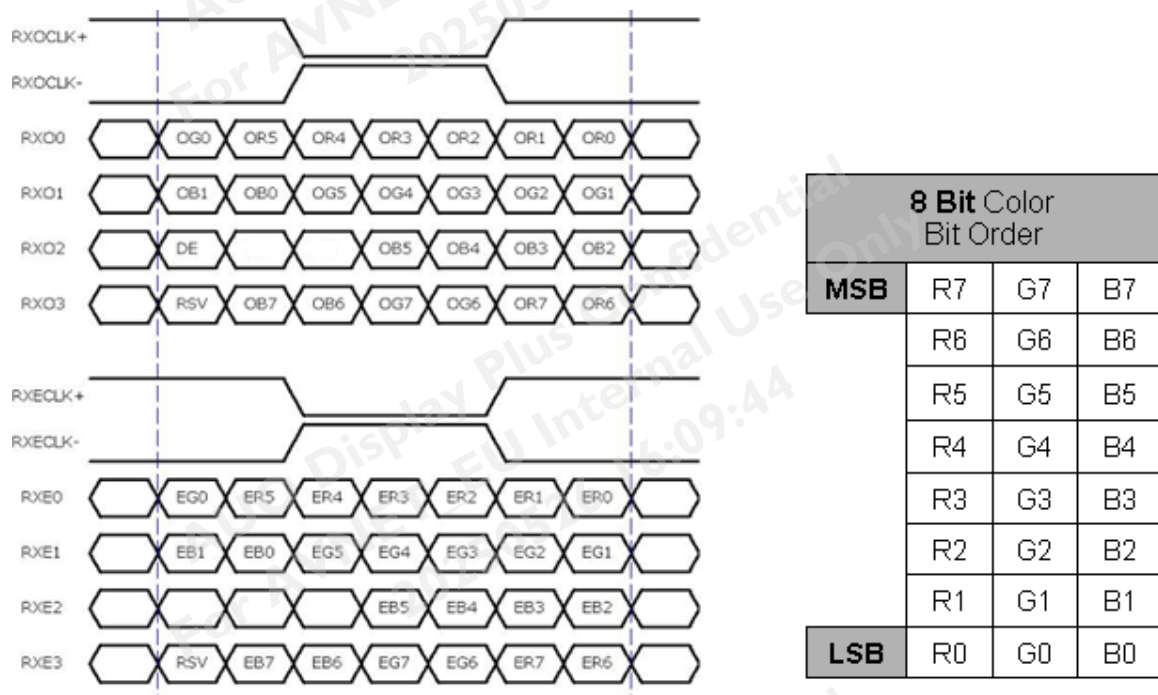

Note 3-2:

- O = "Odd Pixel Data" E = "Even Pixel Data"
- Refer to 3.4.1 LCD pixel format, the 1st data is 1 (Odd Pixel Data), the 2nd data is 2 (Even Pixel Data) and the last data is 1920 (Even Pixel Data).

3.4.3 Color versus Input Data

The following table is for color versus input data (8bit). The higher the gray level, the brighter the color.

Color	Gray Level	Color Input Data																								Remark
		RED data (MSB:R7, LSB:R0)								GREEN data (MSB:G7, LSB:G0)								BLUE data (MSB:B7, LSB:B0)								
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0	
Black	-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
White	-	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Gray 127	-	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1		
Red	L0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Black	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	L255	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Green	L0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Black	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	L255	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0		
Blue	L0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Black	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	L255	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1		

3.4.4 LVDS Specification


a. DC Characteristics:

Symbol	Description	Min	Typ	Max	Units	Condition
V_{TH}	LVDS Differential Input High Threshold	-	-	+100	[mV]	$V_{CM} = 1.2V$
V_{TL}	LVDS Differential Input Low Threshold	-100	-	-	[mV]	$V_{CM} = 1.2V$
$ V_{ID} $	LVDS Differential Input Voltage	100	-	600	[mV]	
V_{CM}	LVDS Common Mode Voltage	+1.0	+1.2	+1.5	[V]	$V_{TH}-V_{TL} = 200mV$

LVDS Signal Waveform:


Use RxOCLK- & RxOCLK+ as example.

Single-End

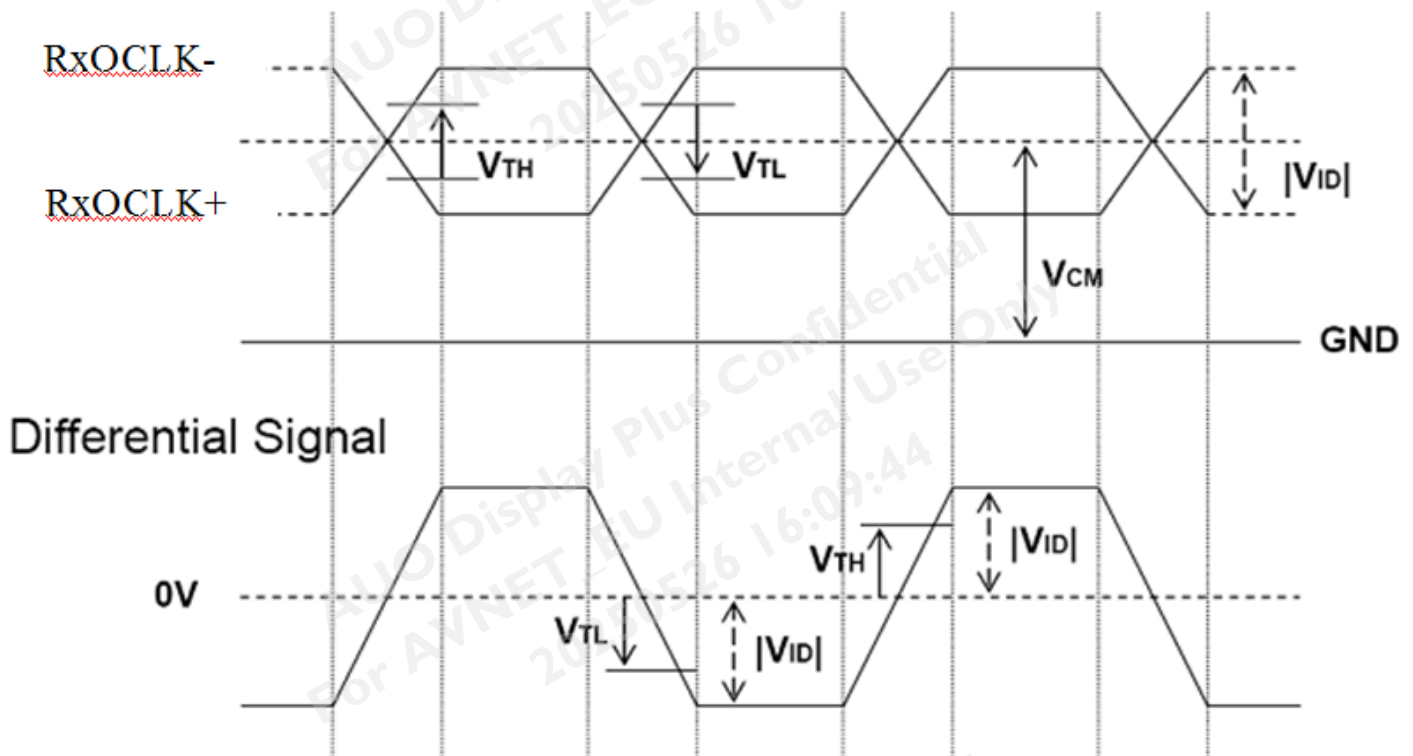

b. AC Characteristics:

Symbol	Description	Min	Max	Unit	Remark
F_{DEV}	Maximum deviation of input clock frequency during Spread Spectrum	-	± 3	%	
F_{MOD}	Maximum modulation frequency of input clock during Spread Spectrum	-	200	KHz	

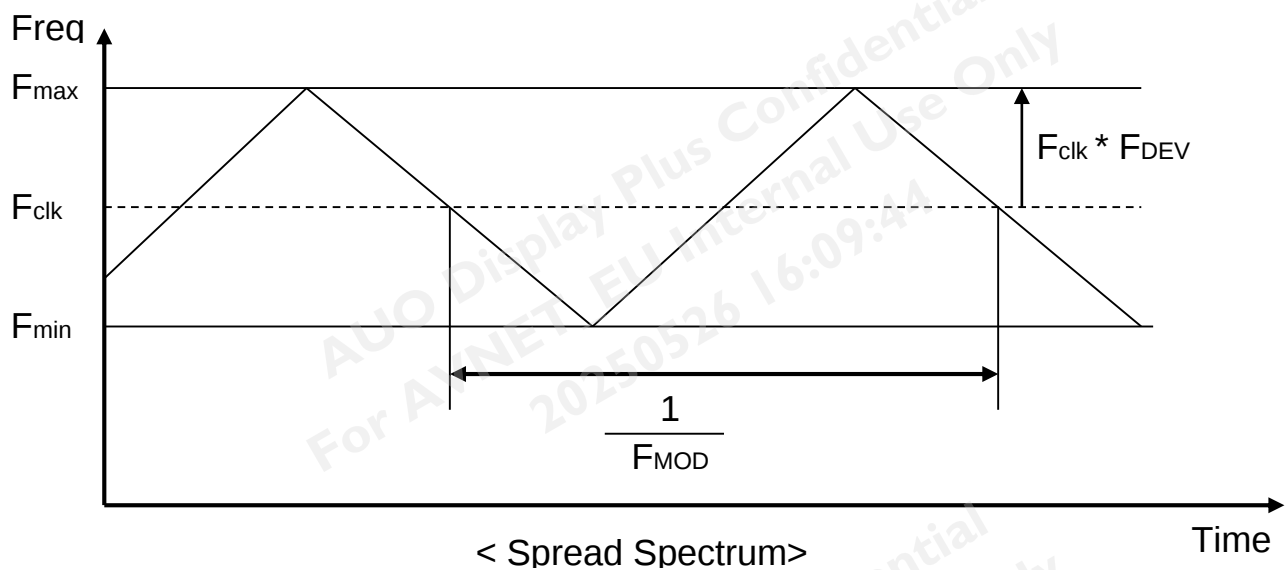

F_{clk} : LVDS Clock Frequency

3.4.5 Input Timing Specification

It only support DE mode, and the input timing are shown as the following table.

Symbol	Description		Min.	Typ.	Max.	Unit	Remark
Tv	Vertical Section	Period	1094	1130	1836	Th	
Tdisp (v)		Active	1080	1080	1080	Th	
Tblk (v)		Blanking	14	50	756	Th	
Fv		Frequency	49	60	76	Hz	
Th	Horizontal Section	Period	1000	1050	1678	Tclk	
Tdisp (h)		Active	960	960	960	Tclk	
Tblk (h)		Blanking	40	90	718	Tclk	
Fh		Frequency	53.7	67.8	90.0	KHz	Note 3-3
Tclk	LVDS Clock	Period	11.2	14.0	18.6	ns	I/Fclk
Fclk		Frequency	53.7	71.2	90.0	MHz	Note 3-4

Note 3-3: The equation is listed as following. Please don't exceed the above recommended value.

$$Fh (\text{Min.}) = Fclk (\text{Min.}) / Th (\text{Min.});$$

$$Fh (\text{Typ.}) = Fclk (\text{Typ.}) / Th (\text{Typ.});$$

$$Fh (\text{Max.}) = Fclk (\text{Max.}) / Th (\text{Min.});$$


Note 3-4: The equation is listed as following. Please don't exceed the above recommended value.

$$Fclk (\text{Min.}) = Fv (\text{Min.}) \times Th (\text{Min.}) \times Tv (\text{Min.});$$

$$Fclk (\text{Typ.}) = Fv (\text{Typ.}) \times Th (\text{Typ.}) \times Tv (\text{Typ.});$$


$$Fclk (\text{Max.}) = Fv (\text{Max.}) \times Th (\text{Typ.}) \times Tv (\text{Typ.});$$

3.4.6 Input Timing Diagram

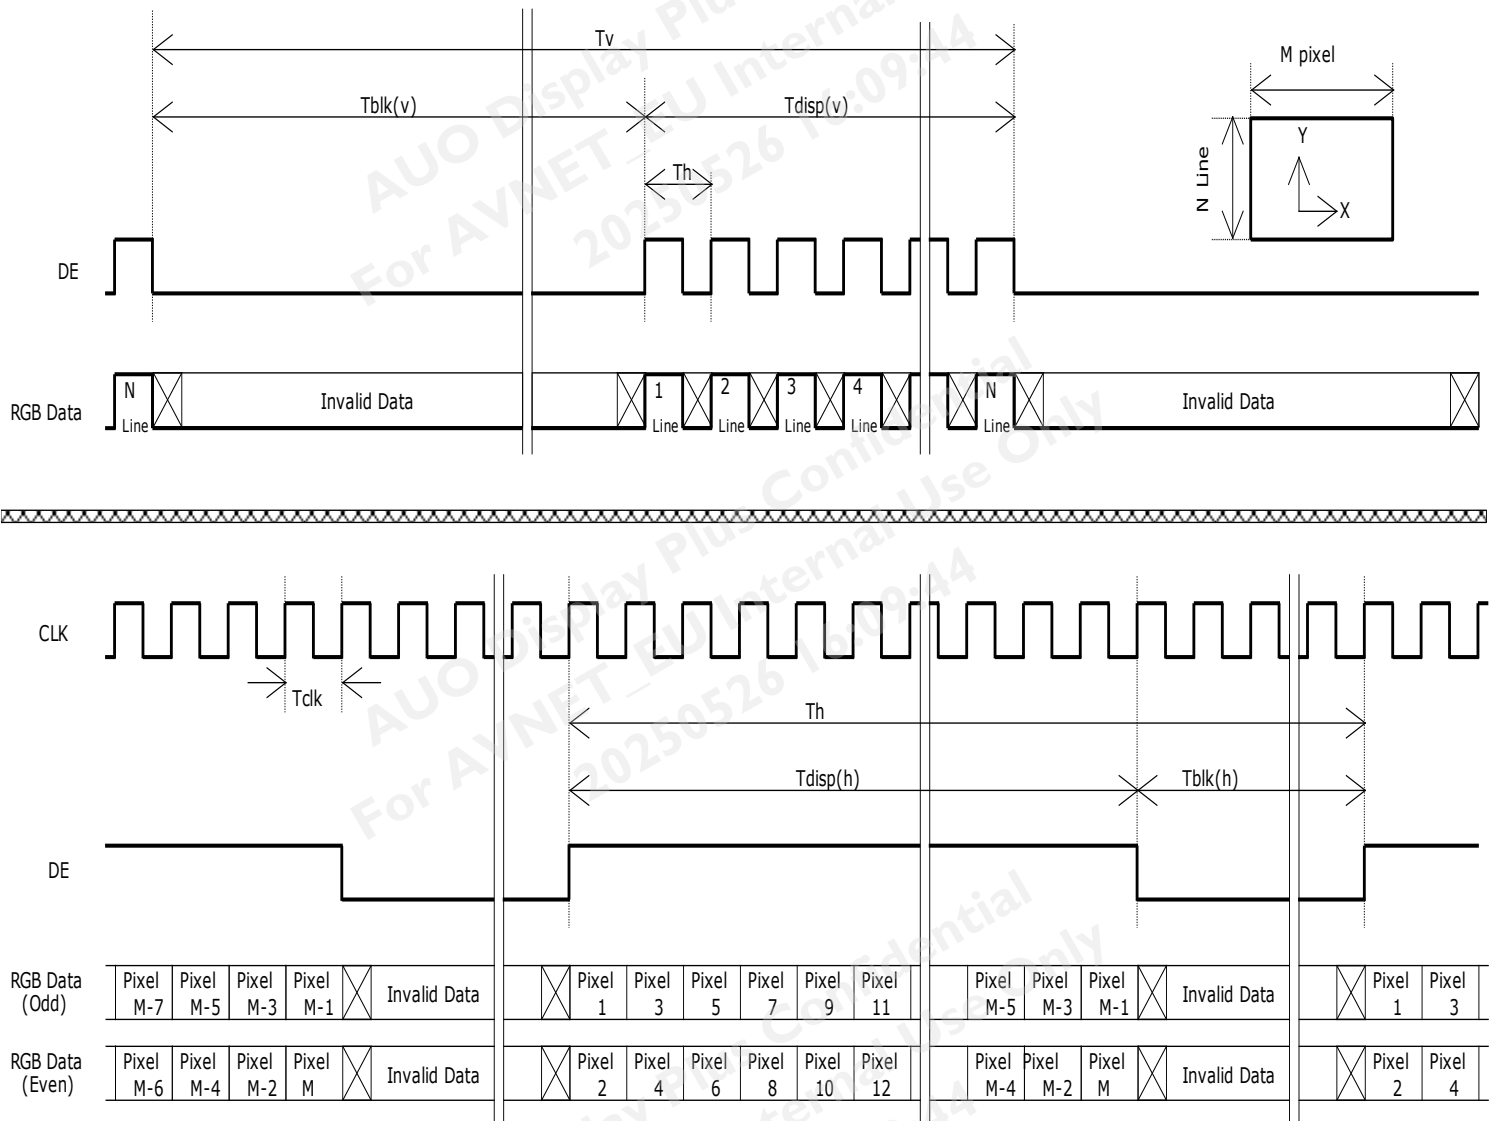

3.5 Power ON/OFF Sequence

VDD power, LVDS signal and backlight on/off sequence are as following. LVDS signals from any system shall be Hi-Z state when VDD is off.

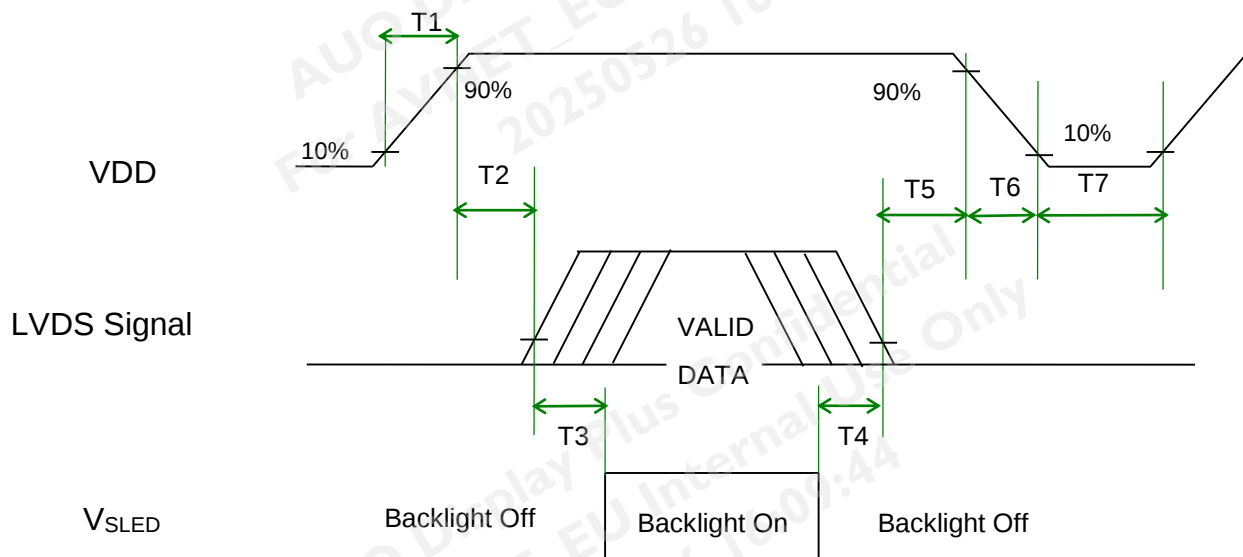

Power Sequence Timing

Symbol	Value			Unit	Remark
	Min.	Typ.	Max.		
T1	0.5	-	10	[ms]	
T2	0	-	50	[ms]	
T3	500	-	-	[ms]	
T4	100	-	-	[ms]	
T5	0	-	50	[ms]	Note 3-5 Note 3-6
T6	0	-	200	[ms]	Note 3-6 Note 3-7
T7	1000	-	-	[ms]	

Note 3-5 : Recommend setting T5 = 0ms to avoid electronic noise when VDD is off.


Note 3-6 : During T5 and T6 period , please keep the level of input LVDS signals with Hi-Z state.

Note 3-7 : Voltage of VDD must decay smoothly after power-off.(customer system decide this value)

4 Backlight Unit

4.1 Block Diagram

The following shows the block diagram of the 21.5 inch Backlight Unit. And it includes 48 pcs LED in the LED light bar. (4 strings and 12 pcs LED of one string).

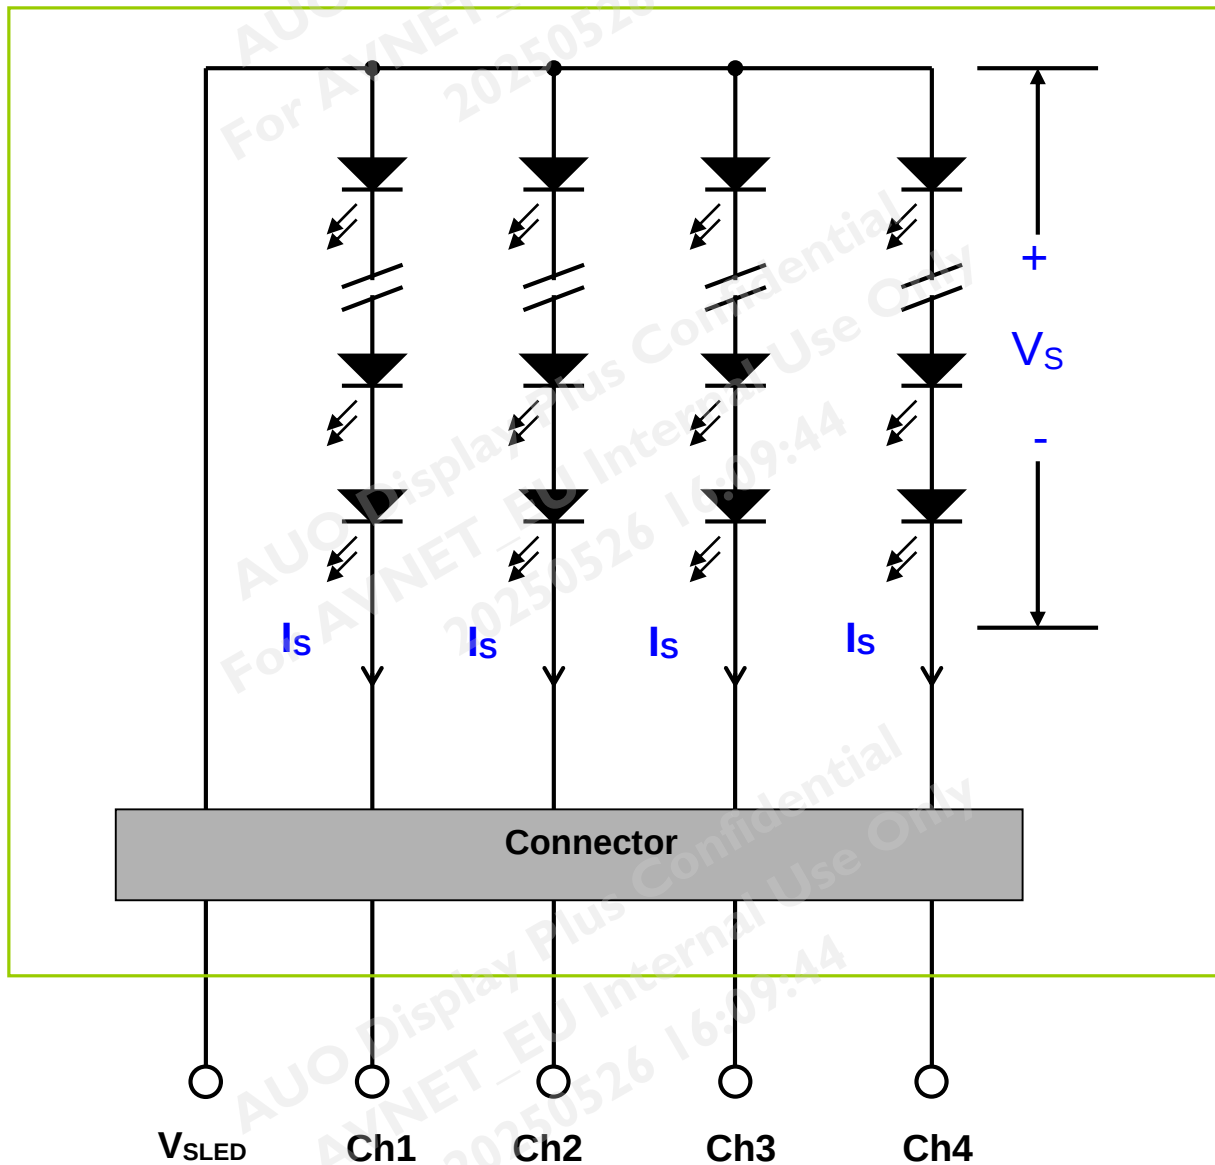



4.2 Interface Connection

4.2.1 Connector Type

Backlight Connector	Manufacturer	CVILUX
	Part Number	CI1406M1HRN-NH1
Mating Connector	Manufacturer	CVILUX or Compatible
	Part Number	CI1406SL000-NH (Lock)

4.2.2 Connector Pin Assignment

Pin#	Symbol	Description	Remark
1	Ch1	LED Current Feedback Terminal (Channel 1)	
2	Ch2	LED Current Feedback Terminal (Channel 2)	
3	V _{SLED}	LED Power Supply Voltage Input Terminal	
4	V _{SLED}	LED Power Supply Voltage Input Terminal	
5	Ch3	LED Current Feedback Terminal (Channel 3)	
6	Ch4	LED Current Feedback Terminal (Channel 4)	

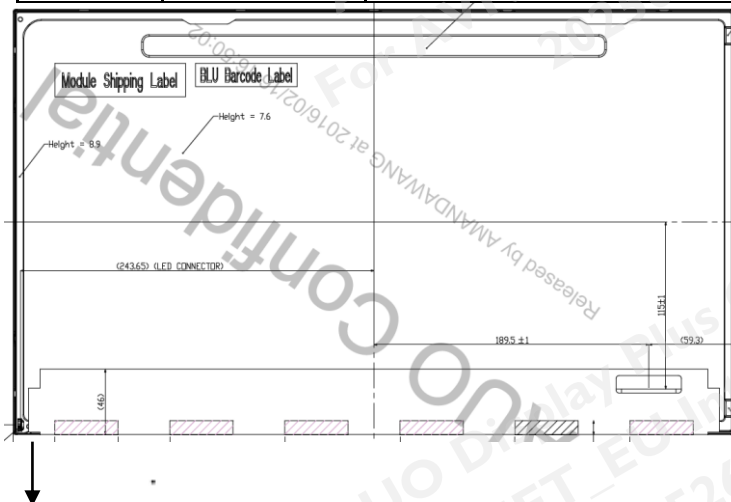


4.3 Electrical Characteristics

4.3.1 Absolute Maximum Rating

Permanent damage may occur if exceeding the following maximum rating.

(Ta=25 °C)

Symbol	Description	Min	Max	Unit	Remark
Is	LED String Current	0	90	[mA]	100% duty ratio
			150	[mA]	Duty ratio ≤ 10% Pulse time = 10 ms



Duty ratio = (A / B) × 100% ; (A: Pulse time, B: Period)


4.3.2 Recommended Operating Condition

(Ta=25 °C)

Symbol	Description	Min.	Typ.	Max.	Unit	Remark
Is	LED String Current	-	65	72	[mA]	100% duty ratio of LED chip, Note 4-6
Vs	LED String Voltage	33.6	34.8	36	[Volt]	Is=65mA @ 100% duty ratio; Note 4-1, Note 4-5, Note 4-7
ΔVs	Maximum Vs Voltage Deviation of light bar	-	-	2.4	[Volt]	Is=65mA @ 100% duty ratio; Note 4-2
P _{BLU}	LED Light Bar Power Consumption	-	9.1	9.4	[Watt]	Note 4-3
LT _{LED}	LED Life Time	30,000	-	-	[Hour]	Note 4-4
OVP	Over Voltage Protection in system board	110% Vsmax	-	-	[Volt]	Note 4-5

Note 4-1: $V_s (\text{Typ.}) = V_F (\text{Typ.}) \times \text{LED No. (one string)}$;

- V_F : LED chip forward voltage, $V_F (\text{Min.})=2.8\text{V}$, $V_F (\text{Typ.})=2.9\text{V}$, $V_F (\text{Max.})=3.0\text{V}$
- The same equation to calculate $V_s (\text{Min.})$ & $V_s (\text{Max.})$ for respective $V_F (\text{Min.})$ & $V_F (\text{Max.})$;

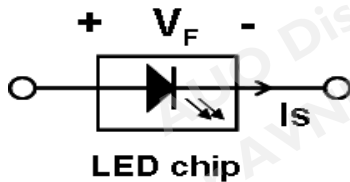

Note 4-2: $\Delta V_s (\text{Max.}) = \Delta V_F \times \text{LED No. (one string)}$;

- ΔV_F : LED chip forward voltage deviation; (0.2 V , each Bin of LED V_F)

Note 4-3: $P_{\text{BLU}} (\text{Typ.}) = V_s (\text{Typ.}) \times I_s (\text{Typ.}) \times 4$; (4 is total String No. of LED Light bar)

$$P_{\text{BLU}} (\text{Max.}) = V_s (\text{Max.}) \times I_s (\text{Typ.}) \times 4 ;$$

Note 4-4: Definition of life time:

- Brightness of LED becomes to 50% of its original value
- Test condition: $I_s = 65\text{mA}$ and 25°C (Room Temperature)

Note 4-5: Recommendation for LED driver power design:

Due to there are electrical property deviation in LED & monitor set system component after long time operation. ADP strongly recommend the design value of LED driver board OVP (over voltage protection) should be 10% higher than max. value of LED string voltage (V_s) at least.

Note 4-6: ADP strongly recommend “Analog Dimming” method for backlight brightness control for Wavy Noise Free. Otherwise, recommend that Dimming Control Signal (PWM Signal) should be synchronized with Frame Frequency.

Note 4-7: Ensure that the LED light bar is not subjected either forward or reverse voltage while monitor set is on standby mode or not in use.

5 Reliability Test

ADP reliability test items are listed as following table. (*Bare Panel only*)

Items	Condition	Remark
Temperature Humidity Bias (THB)	Ta= 50 °C, 80%RH, 300hours	
High Temperature Operation (HTO)	Ta= 50 °C, 50%RH, 300hours	
Low Temperature Operation (LTO)	Ta= 0 °C 300hours	
High Temperature Storage (HTS)	Ta= 60 °C, 300hours	
Low Temperature Storage (LTS)	Ta= -20 °C, 300hours	
Vibration Test (Non-operation)	Acceleration: 1.5 Grms Wave: Random Frequency: 10 - 200 Hz Sweep: 30 Minutes each Axis (X, Y, Z)	
Shock Test (Non-operation)	Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis)	
Thermal Shock Test (TST)	-20 °C /30min, 60 °C /30min, 100 cycles	Note 5-1
On/Off Test	On/10sec, Off/10sec, 30,000 cycles	
ESD (Electro Static Discharge)	Contact Discharge: ± 15KV, 150pF(330Ω) 1sec, 8 points, 25 times/ point.	Note 5-2
	Air Discharge: ± 15KV, 150pF(330Ω) 1sec 8 points, 25 times/ point.	
Altitude Test	Operation:18,000 ft Non-Operation:40,000 ft	

Note 5-1: a. A cycle of rapid temperature change consists of varying the temperature from -20 °C to 60 °C, and back again. Power is not applied during the test.

b. After finish temperature cycling, the unit is placed in normal room ambient for at least 4 hours before power on.

Note 5-2: EN61000-4-2, ESD class B: Certain performance degradation allowed

No data lost

Self-recoverable

No hardware failures.

6 Shipping Label

Definition of Label



		AUO Display Plus AUO Corporation		
XXXXXXXXXX-XXXXXX				
XXXXXXXXXXXXXXXXXXXXXXXXXXXX				
XXXXXXXX ADP NO: P215HAN01.1 ; AUO NO: P215HAN01.1 XXXXX	XXXXXXXX		Bauart geprüft Sicherheit Regelmäßige Produktions- Überwachung www.tuv.com ID 2000000000	
Manufactured <u>XX/XX</u>	MADE IN <u>XXXXX</u>			

- (1) For Pb Free Product, ADP will add  for identification.
- (2) For RoHS compatible products, ADP will add  for identification.
- (3) For "Cadmium Free product, ADP will add  for identification.
- (4) Note: The green Mark will be present only when the green documents have been ready by ADP internal green team. (definition of green design follows the ADP green design checklist.)

B. Carton Label:

AUO Display Plus MODEL NO : P215HAN01.1 PART NO : 97.21P03.100 AUO Corporation MODEL NO : P215HAN01.1 PART NO : 97.21P03.100	QTY:		
CUSTOMER NO: XXXXX-XXXXX-XXXXX			
CARTON NO:			
Made in XXXXXX	*XXXXXXXX-XXXXXXXXXX*		

NOTE:

- THE DIMENSION EXCLUDES DEFORMATION.
- TOLERANCE WITHOUT NOTICED TO BE $\pm 0.5\text{mm}$.
- SUGGEST FOR CUSTOMER SCREW SELECTION
CUSTOMER ASSEMBLY TOLERANCE + CUSTOMER CHASSIS THICKNESS
- TORQUE OF M3 USER HOLE SHOULD BE WITHIN 3 kgf-cm AND JUST RESCREW 10 TIMES.
- USER HOLE SCREW PENETRATION IS 2.0mm MAX.

SECTION AA-AA SCALE 3.000


SECTION BB-BB SCALE 3.000

BEZEL FRONT (T=0.5)

SECTION Y-Y SCALE 2.000


REV	FOR NO.	DESCRIPTION	DATE	DRAWN BY	CHECKED BY
1	-	-	July 1st	AVNET	AVNET

LEVEL	General Information	Material	QTY	Unit	Remarks
1	AVN-070-AU01	AUO LCD Panel	1	Pcs	For AVNET EU Internal Use Only
2	AVN-070-AU01	M3 Screw	4	Pcs	For AVNET EU Internal Use Only
3	AVN-070-AU01	Bezel	1	Pcs	For AVNET EU Internal Use Only
4	AVN-070-AU01	Mounting Bracket	1	Pcs	For AVNET EU Internal Use Only

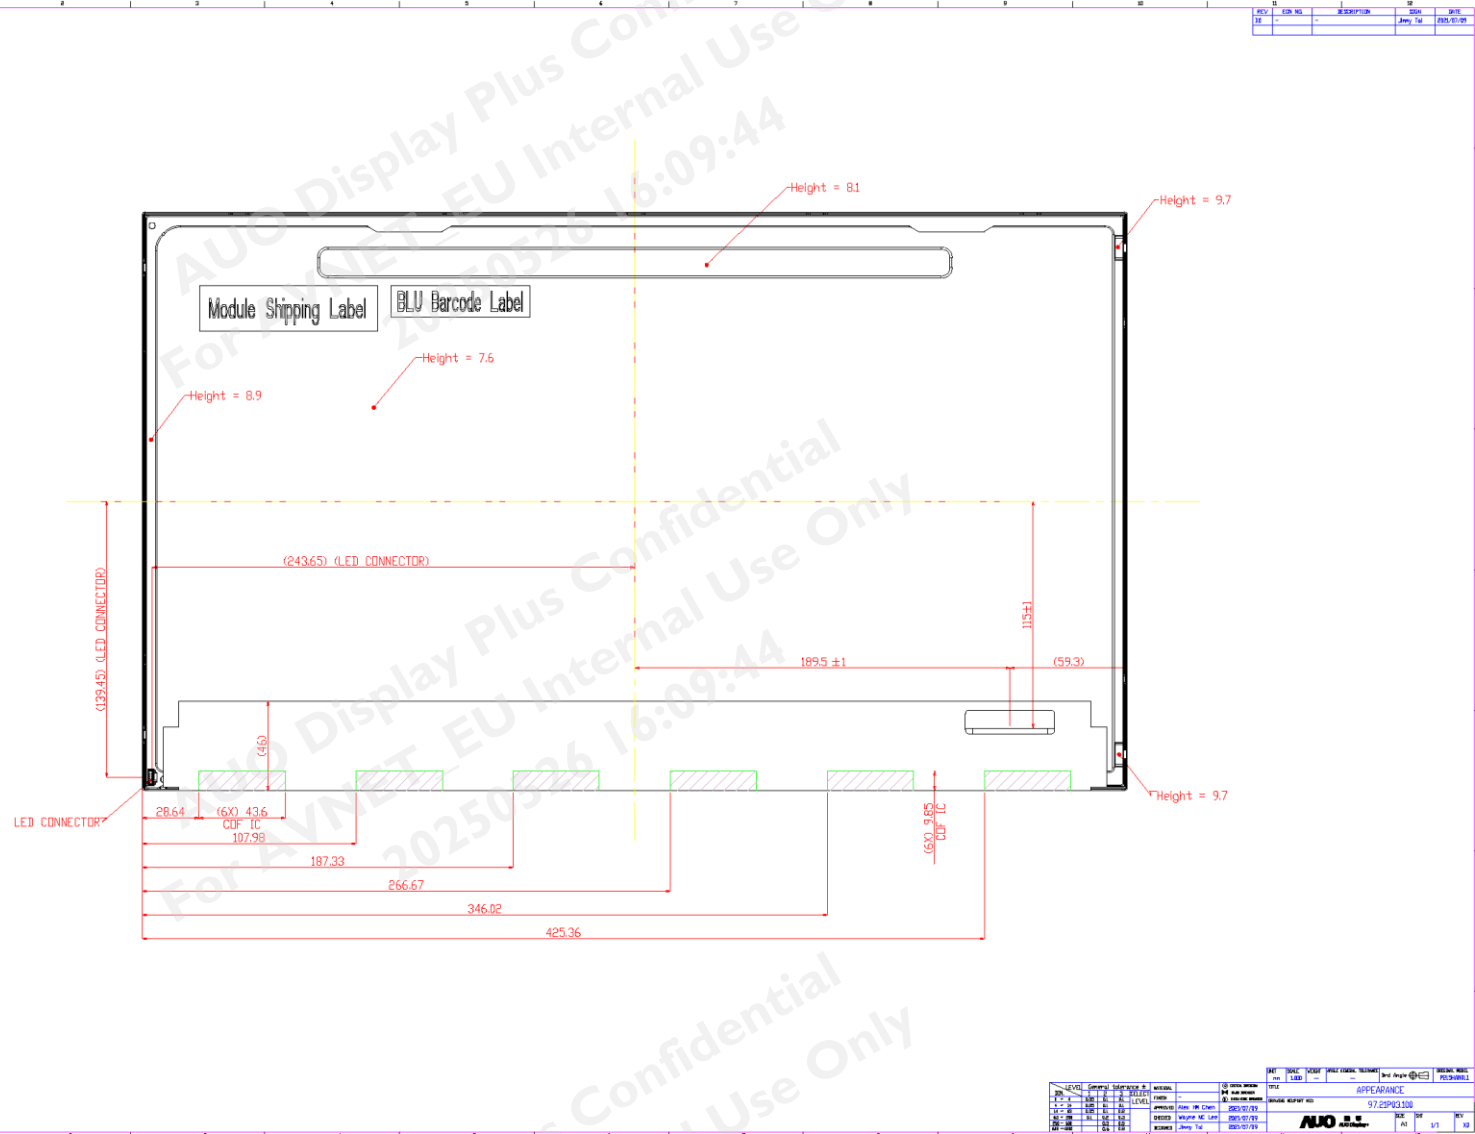

8 Packing Specification

8.1 Packing Flow

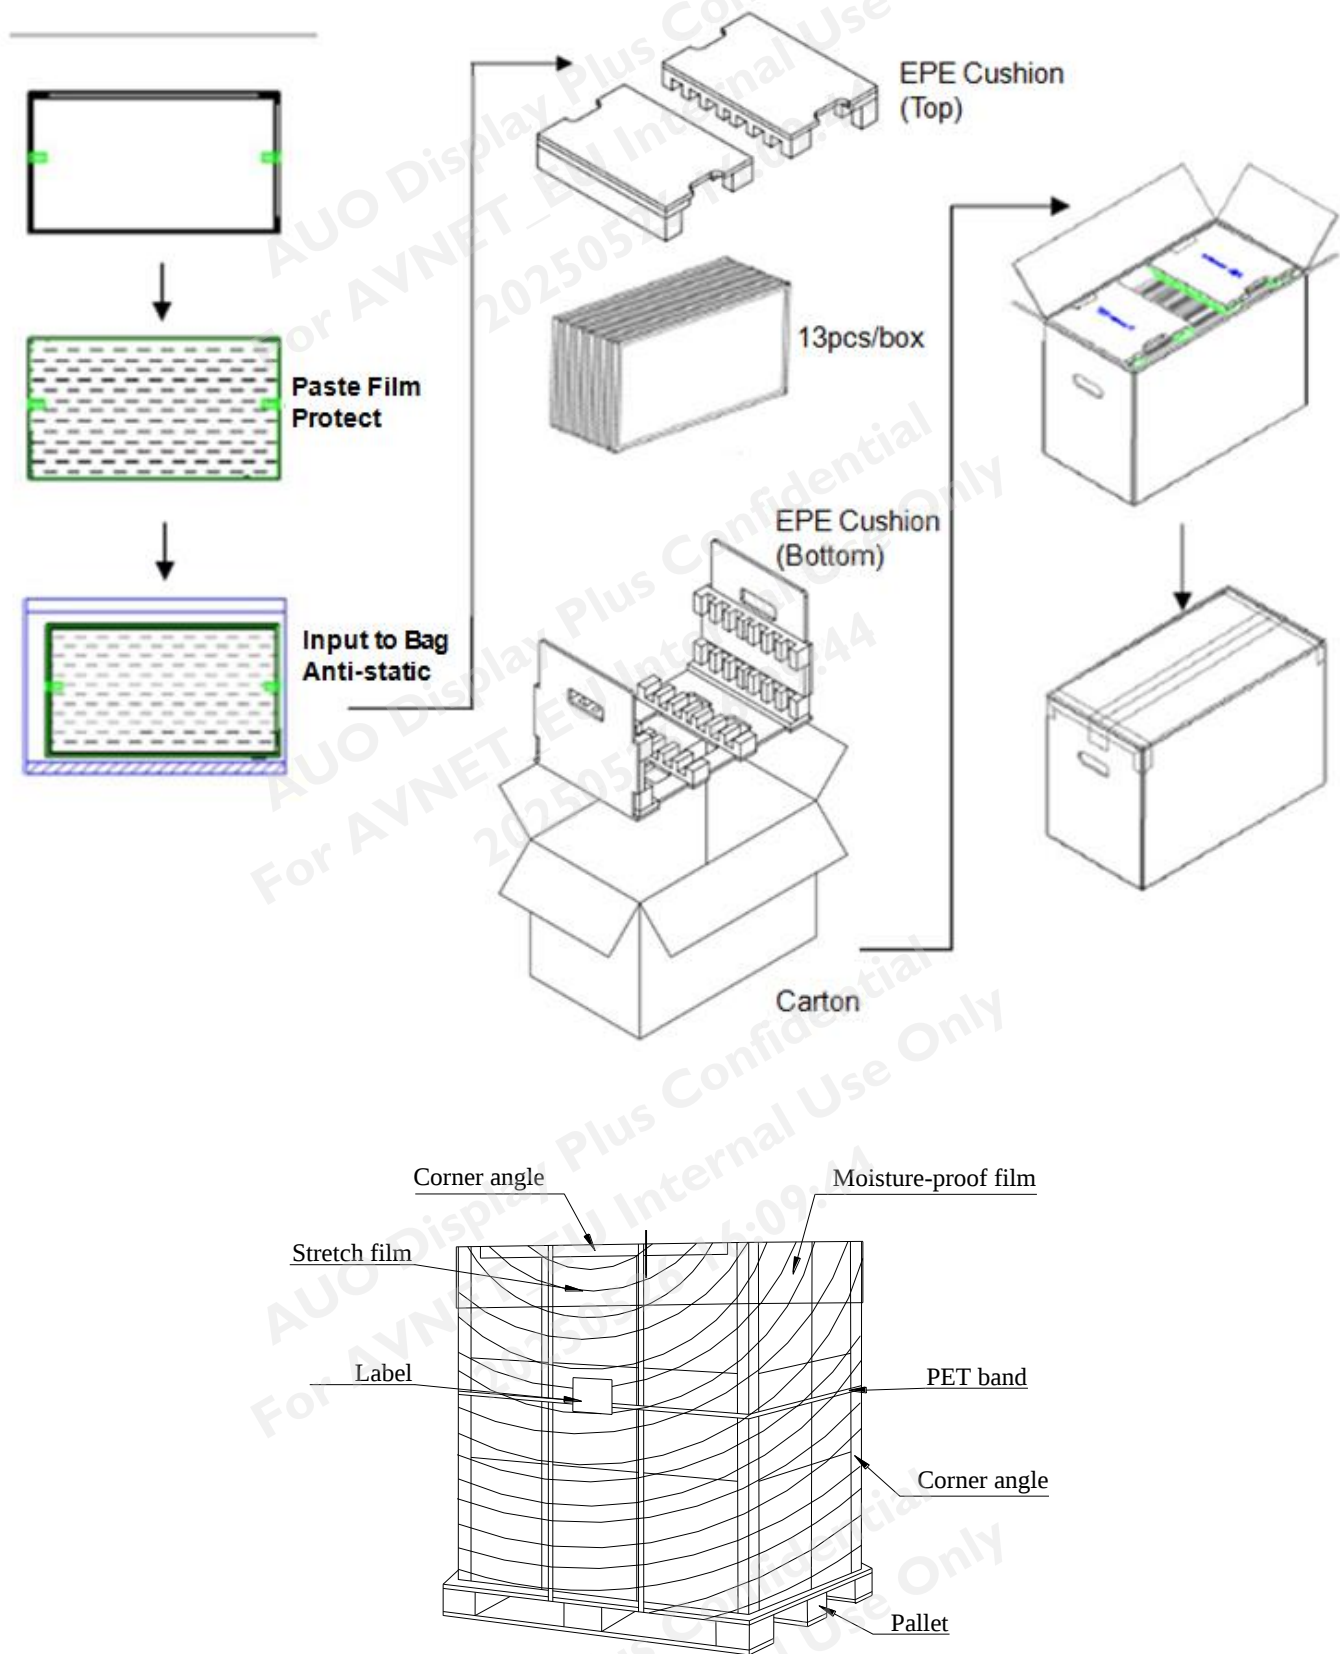


8.2 Pallet and shipment information

Item	Specification			Remark
	Q'ty	Dimension	Weight(kg)	
Panel	1	497.6(H)mm × 292.2(V)mm × 10.5(D)mm	1.74	
Cushion	1	-	0.55	
Box	1	565(L)mm × 345(W)mm × 375(H)mm	1.40	without Panel
Packing Box	13pcs/Box	565(L)mm × 345(W)mm × 375(H)mm	24.57	with panel & Box & cushion
Pallet	1	1150(L)mm × 1070(W)mm × 132(H)mm	14.2	
Pallet after Packing	18 boxes/pallet	1150(L)mm × 1070(W)mm × 1257(H)mm	456.46	


9 Design Guide for System

9.1 The gap between LCM and system rear bracket should be bigger than 0.5mm.


9.2 The system bracket should be fixed on back cover firmly.

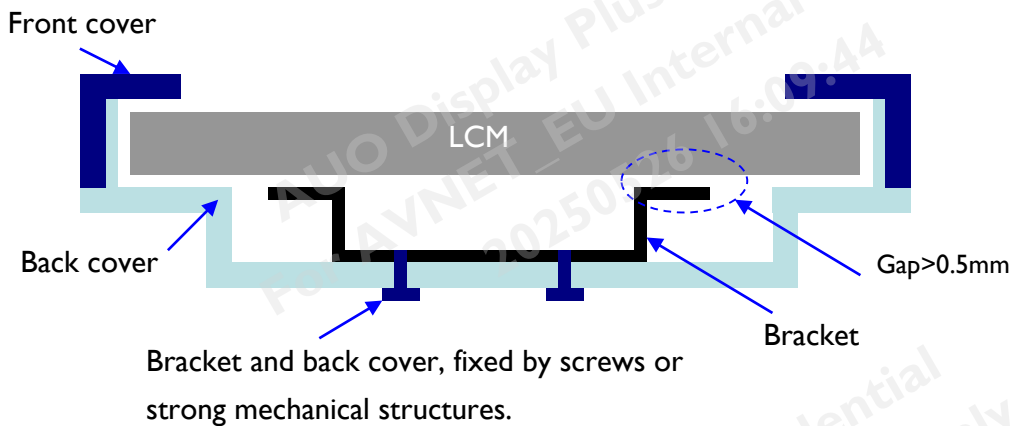

9.3 The EMI gasket should be uniform and not push panel strongly.

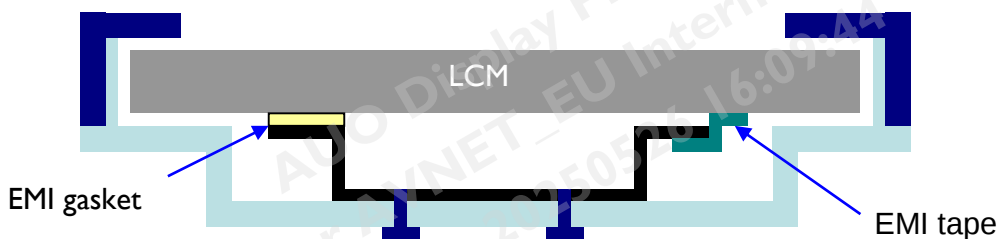


9.4 For stable assembly, the system bracket should use 4 screws to fix system and panel by dual sides.

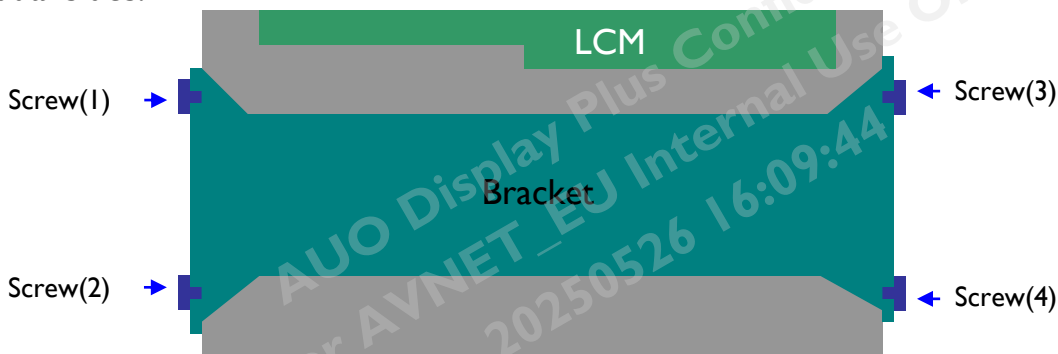

9.5 The system bracket and panel should be in parallel with having no gap after inserting screws.

Proper and Parallel gap

0 gap and no mechanical damage

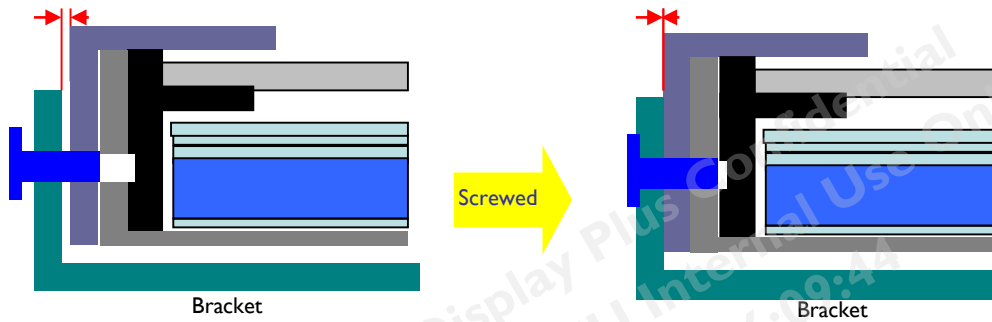

9.6 Avoid scratching LCM, the rib on system front-cover should not exceed the bottom edge of LCM's front-bezel.

