

# LX-218CA

Self-powered subwoofer system



- » Bass-reflex configuration
- » Two 18LXN long-excursion loudspeakers
- » 2400 W class D power amplifier
- » “Cardiod Preset” for two or three of subwoofers
- » Active over-excursion protection

The D.A.S. LX-218CA is a high-performance powered bass-reflex sub-woofer system.

24 bit DSP provides RMS, peak and over-excursion limiters.

The LX-218CRA version is intended as a flyable subwoofer for the Aero line array systems.

The innovative “Cardiod Preset” switch enables cardioid pattern for two or three subwoofers.

The unit utilizes two 18LXN long-excursion 18" low frequency speakers with 4" voice coil. Improved voice coil materials, magnet circuit and surround design provide high power handling, low power compression and low distortion.


Signal present and limiter leds indicate the system status.

The system incorporates a 2400 W Class D switching amplifier, powering the low-frequency transducers.

## Technical Specifications

<b>Power Amplifier<sup>1</sup></b>	4800 W <sub>peak</sub> - 2400 W <sub>continuous</sub>
<b>Input Type</b>	Balanced Differential Line
<b>Input Impedance</b>	Line: 20 kohms
<b>Sensitivity</b>	Line: 1.95 V (+8 dBu)
<b>On-axis Frequency Range (-10 dB)</b>	28 Hz - 100 Hz
<b>Rated Peak SPL at Full Power</b>	142 dB
<b>Enclosure Material</b>	Birch Plywood
<b>Finish</b>	Black Paint
<b>Transducers/Replacement Parts</b>	2 x 18LXN / GM 18LX
<b>Connectors</b>	INPUT: Female XLR LOOP THRU: Male XLR
<b>Mains Voltage</b>	AC INPUT: PowerCon NAC 3 FCA
<b>Consumption</b>	AC 85 V - 270 V, 50/60 Hz with PFC 6.2 A @ 115 V 3.1 A @ 230 V
<b>LX-218CA Dimensions (H x W x D)</b>	55 x 128 x 63.2 cm (22 x 51 x 24.9 in)
<b>LX-218CRA Dimensions (H x W x D)</b>	55 x 135 x 69.6 cm (22 x 53.2 x 27.4 in)
<b>Weight</b>	LX-218CA 80.5 kg (177.1 lb) LX-218CRA 99.5 kg (218.9 lb)
<b>Accessories (optional)</b>	AX-Aero50 AX-Combo12 KITW-100 KITR-LX218C (included with “R” version) PL-LX218C (only included with “R” version) PL-218CS Flat Bed Dolly Pick Up AX-Aero50


## Dimensions

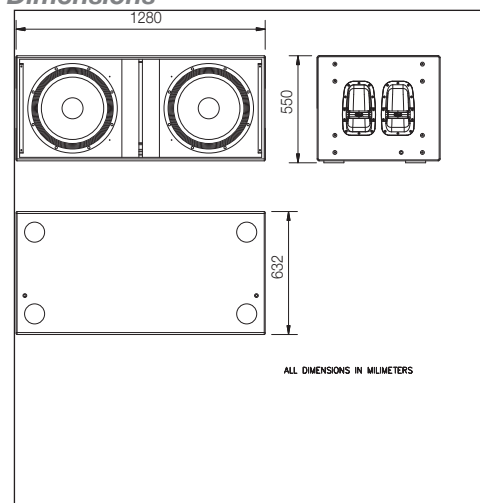

1. Continuous power at driver impedance.

**Frequency Response**

Figure 1 shows the frequency response at 1 m of a unit radiating to an anechoic environment and driven by a swept sine wave signal (-20 dBu input).

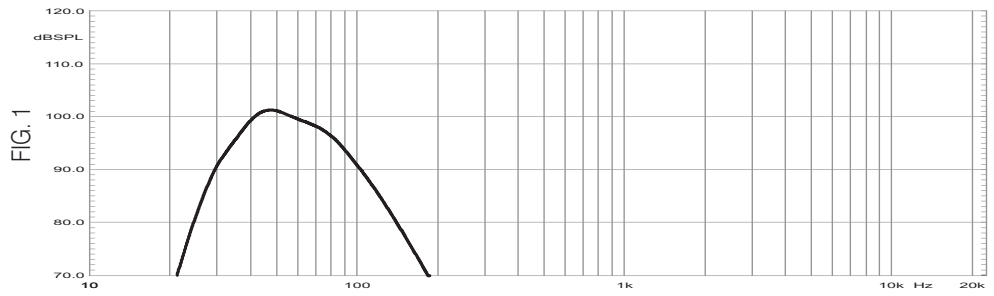

18LXN long-excursion low distortion loudspeaker

NOTES. 1.Frequency response: referred to 1 m; low end obtained through the use of near field techniques; one-third octave smoothed for correlation with human hearing.

*Product improvement through research and development is a continuous process at D.A.S. Audio. All specifications subject to change without notice.*



**D.A.S. Audio S.A.**  
 C/ Iles Balears, 24  
 46988 Fuente del Jarro  
 Valencia - SPAIN  
 Tel. 961 340 525 - Tel. Intl. +34 961 340 860  
 Fax 961 340 607 - Fax Intl. +34 961 340 607

**D.A.S. Audio of America Inc.**  
 Sunset Palmetto Park - 6816 NW 77th Court  
 Miami, FL 33166 U.S.A.  
 Tel. 305 436 0521 - Fax. 305 436 0528  
 Toll Free: 1 888 DAS 4 USA

**D.A.S. Audio Asia Pte. Ltd.**  
 25 Kaki Bukit Crescent # 01-00/ 02-00  
 Kaki Bukit Technpark 1 - Singapore 416256  
 Co. Reg. No. 200704134E  
 Tel. +65 6742 0151 - Fax. +65 6742 0157

[www.dasaudio.com](http://www.dasaudio.com)