

LX-218CA_net

Self-powered subwoofer system



- » Bass-reflex configuration
- » Two 18LXN long-excursion loudspeakers
- » 2400 W class D power amplifier
- » “Cardiod Preset” for two or three of subwoofers
- » Active over-excursion protection
- » Remote monitoring and control via DASnet™

The D.A.S. LX-218CA_net is a high-performance powered bass-reflex sub-woofer system.

The LX-218CRA_net version is intended as a flyable subwoofer for the Aero line array systems.

The unit utilizes two 18LXN long-excursion 18" low frequency speakers with 4" voice coil. Improved voice coil materials, magnet circuit and surround design provide high power handling, low power compression and low distortion.

The system incorporates a 2400 W Class D switching amplifier, powering the low-frequency transducers.

limiters.

The innovative “Cardiod Preset” switch enables cardiode patern for two or three subwoofers.

Signal present and limiter leds indicate the system status.


Remote monitoring and control is provided by way of DASnet™, the audio management application for D.A.S. powered cabinets and processors which offers users instant and intuitive view of the system status as well as control over a range of parameters of a single cabinet or a network of them.

24 bit DSP provides RMS, peak and over-excursion

Technical Specifications

Power Amplifier¹	4800 W _{peak} - 2400 W _{continuous}
Input Type	Balanced Differential Line
Input Impedance	Line: 20 kohms
Sensitivity	Line: 1.95 V (+8 dBu)
On-axis Frequency Range (-10 dB)	28 Hz - 100 Hz
Rated Peak SPL at Full Power	142 dB
Enclosure Material	Birch Plywood
Finish	Black Paint
Transducers/Replacement Parts	2 x 18LXN / GM 18LX
Connectors	Audio INPUT: Female XLR Audio LOOP THRU: Male XLR Audio + Data INPUT: etherCON Audio + Data LOOP THRU: etherCON AC INPUT: powerCON TRUE 1
Mains Voltage Consumption	AC 85 V - 270 V, 50/60 Hz with PFC 6.2 A @ 115 V 3.1 A @ 230 V
LX-218CA_net Dimensions (H x W x D)	55 x 128 x 63.2 cm (22 x 51 x 24.9 in)
LX-218CRA_net Dimensions (H x W x D)	55 x 135 x 69.6 cm (22 x 53.2 x 27.4 in)
Weight	LX-218CA_net 80.5 kg (177.1 lb) LX-218CRA_net 99.5 kg (218.9 lb)
Accessories (optional)	AX-Aero50 AX-Combo12 KITW-100 KITR-LX218C (included with “R” version) PL-LX218C (only included with “R” version) PL-218CS Flat Bed Dolly Pick Up AX-Aero50

Dimensions

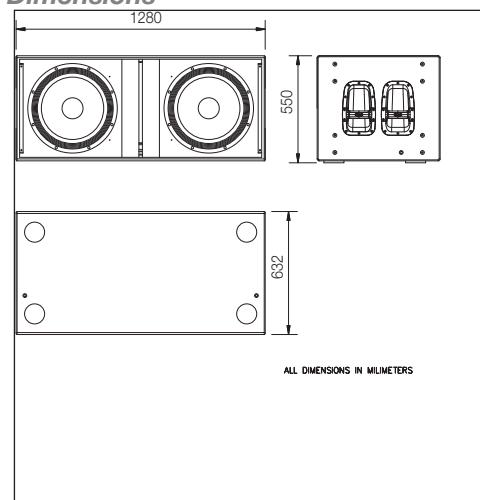


ALL DIMENSIONS IN MILLIMETERS

1. Continuous power at driver impedance.

Frequency Response

Figure 1 shows the frequency response at 1 m of a unit radiating to an anechoic environment and driven by a swept sine wave signal (-20 dBu input).

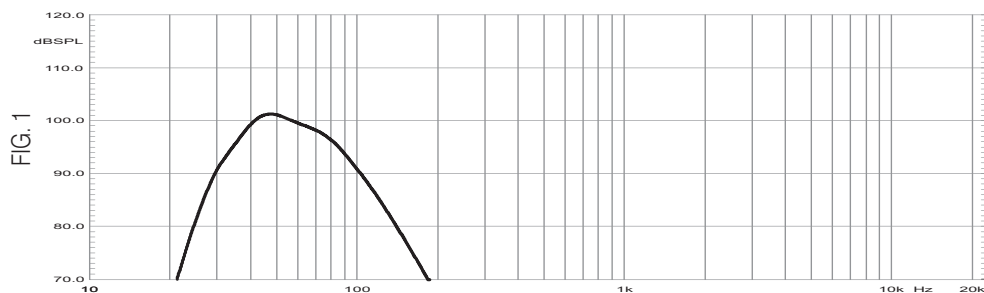

18LXN long-excursion low distortion loudspeaker

NOTES. 1.Frequency response: referred to 1 m; low end obtained through the use of near field techniques; one-third octave smoothed for correlation with human hearing.

Product improvement through research and development is a continuous process at D.A.S. Audio. All specifications subject to change without notice.



D.A.S. Audio S.A.
C/ Islas Baleares, 24
46988 Fuente del Jarro
Valencia - SPAIN
Tel. 961 340 525 - Tel. Intl. +34 961 340 860
Fax 961 340 607 - Fax Intl. +34 961 340 607

D.A.S. Audio of America Inc.
Sunset Palmetto Park - 6816 NW 77th Court
Miami, FL 33166 U.S.A.
Tel. 305 436 0521 - Fax. 305 436 0528
Toll Free: 1 888 DAS 4 USA

D.A.S. Audio Asia Pte. Ltd.
25 Kaki Bukit Crescent # 01-00/ 02-00
Kaki Bukit Techpark I - Singapore 416256
Co. Reg. No. 200704134E
Tel. +65 6742 0151 - Fax. +65 6742 0157

www.dasaudio.com