




DIMENSIONS



ACCESSORIES



HIGH CHROMATIC LED



TRACK 3L+N OPTIONS

PRODUCT

Name	SIX 2 34° 4000K WT
Reference	A2862122WT
Color	Textured white
Category	SPOTLIGHTS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	2800 Lm
Power	23 W
Power values of the system	27,06 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	34°
Lighting efficiency	90%
Efficacy	122 Lm/W
Current intensity	650 mA
Driver	Incl.
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Swivel angle	310°
Rotation angle	340°
Track type	Track 3L+N
Weight	730 g.
Packaged weight	836 g.
Packaging dimensions	218 x 195 x 62 mm.
Units per package	1
Materials	Aluminium / Polycarbonate




Six is a spotlight for track or single recessed installation, standing out by its optical lightness and elegance. Its body comes in shape of a disk with an innovative combination of reflector and lense, achieving to direct the light with maximum uniformity and allowing a differentiated, compact and minimalist design. Six desists from the unaesthetic box for the driver and directly connects to the track adapter though an articulated arm that permits the orientation of the fitting to any direction. Power and luminous flux of Six are very remarkable in view of its size, offering state of the art technical performance.

POLAR DIAGRAM

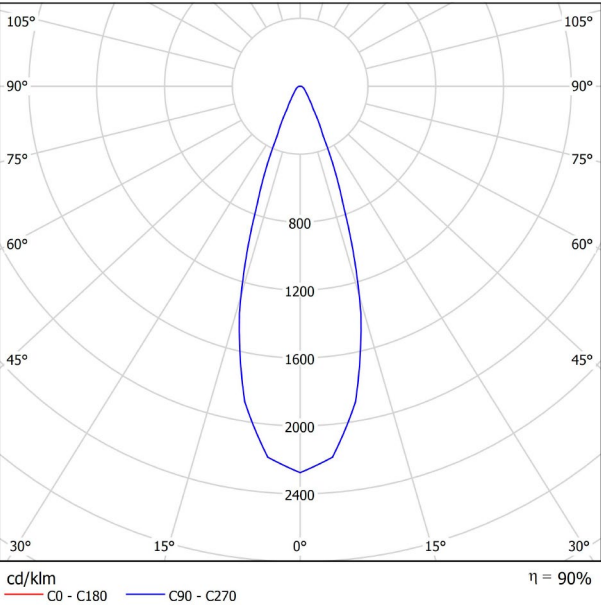

CONICAL DIAGRAM

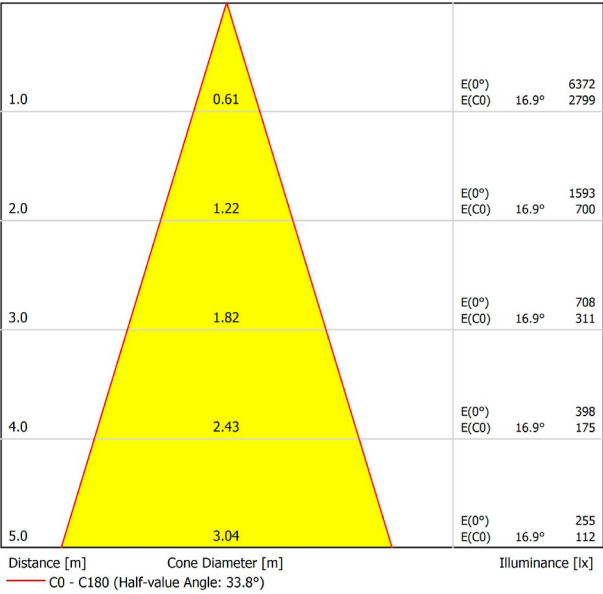









HIGH CHROMATIC LED

FOR COMMERCIAL PRODUCT SHOWCASING

ARKOSLIGHT®




Vivid Model Colour Temperature	2700K	3000K	3500K	4000K	Light Pink
 Reading			•	•	
 Fruits & Vegetables		•	•		
 Bakery	•				
 Retail		•	•		
 Cosmetics			•	•	
 Meat					•
 Fish				•	
 Seafood				•	•

For some of its products, Arkoslight offers the possibility to provide them with a special LED, designed to create an illumination focused on visually promoting goods or products for commercial purposes.

It is a high chromaticity LED, capable of identifying the colour shades that produce a positive psychological perception of the illuminated object.

This special LED lighting source offers a much more attractive and intense colour range than a conventional LED, besides being much wider. Technically, this is possible thanks to a special LED setting that includes a « special saturation parameter », capable of highlighting the objects colours and materials in such a way that they seem more attractive within the visible light spectrum. To achieve this performance, in each case, the appropriate diode and specific phosphor coating are carefully selected.



TRACK 230V 3L+N SURFACE & SUSPENDED



TRACK 230V 1M	A282-01-00- B N
TRACK 230V 2M	A282-02-00- B N
TRACK 230V 3M	A282-03-00- B N




TRACK 230V 3L+N FLUSH MOUNTING



TRACK 230V FLUSH 1M	A282-11-00- B N
TRACK 230V FLUSH 2M	A282-12-00- B N
TRACK 230V FLUSH 3M	A282-13-00- B N




TRACK 230V 1M

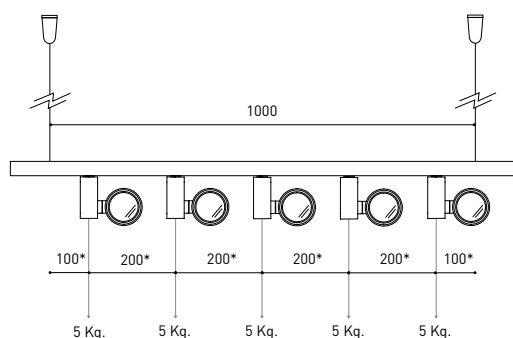

*minimum distance (mm.)

Fastening distance and loading capacity.
Recommended fastening distance $l \sim 1000$ mm.

TRACK 230V 2M

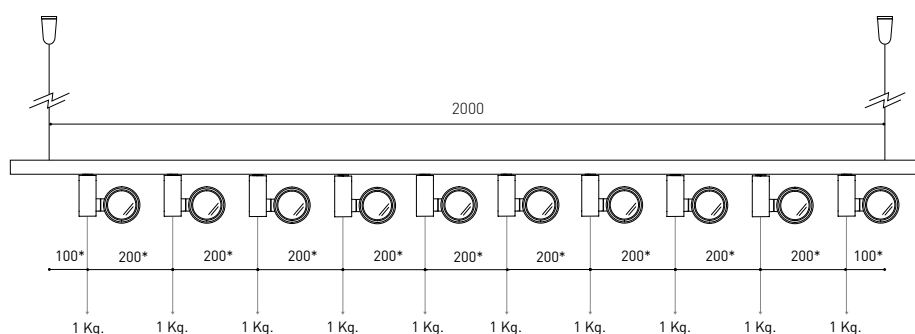


*minimum distance (mm.)

COLORES | B ☐ | N ☒ |

SURFACE & SUSPENDED


POLARITY GROOVE



TRACK 230V Live-End Connector


A282-00-01- | B | N |

A282-00-02- | B | N |




TRACK 230V Central Connector

A282-00-03- | B | N |




TRACK 230V Ceiling Kit

A219-21-06- | B | N |



TRACK 230V Universal Angle


A282-00-15- | B | N |



TRACK 230V 90° Angle

A282-00-06- | B | N |


A282-00-07- | B | N |



TRACK 230V T Joint


A282-00-16- | B | N |

A282-00-17- | B | N |



TRACK 230V Mechanical Joint

A219-21-11- | B | N |




TRACK 230V Suspension Kit

A219-21-10- | B | N |

At least 2 units needed

FLUSH MOUNTING

POLARITY GROOVE



TRACK 230V Live-End Connector


A282-00-01- | B | N |

A282-00-02- | B | N |

TRACK 230V FLUSH Cover Plate

A282-10-19- | B | N |

Mandatory for installation




TRACK 230V Central Connector

A282-00-03- | B | N |

TRACK 230V FLUSH Cover Plate


A282-10-19- | B | N |

Mandatory for installation



TRACK 230V FLUSH Ceiling Kit

A219-22-06- | B |



TRACK 230V 90° Angle


A282-00-06- | B | N |

A282-00-07- | B | N |

TRACK 230V FLUSH Corner Cover Plate

A282-10-20- | B | N |

Mandatory for installation



TRACK 230V T Joint

A282-00-16- | B | N |


A282-00-17- | B | N |

TRACK 230V FLUSH Corner Cover Plate

A282-10-20- | B | N |


Mandatory for installation

SURFACE & SUSP. / FLUSH MOUNTING




TRACK Contact Joint

A282-00-04- | B | N |



TRACK End

A219-20-02- | B | N |



TRACK Bending Tool

A282-00-00

COLORES | B □ | N ■ |