




DIMENSIONS



AWARDS



Name	Pointer 300mA 11W DIM DALI/PUSH 56° 2700K W
Reference	A2713320W
Color	Matt white
Category	Ceiling Recessed

PRODUCT

Light source	LED
Gross luminous flux	1200 Lm
Power	11 W
Power values of the system	12,5 W
Colour temperature	2700 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	56°
Lighting efficiency	78%
Efficacy	109 Lm/W
Current intensity	300 mA
Dimming	DALI / Push - Other DIM, please consult
Control through bluetooth	Please Consult
Driver	Incl.
Fast connection of the driver to the mains supply	Please Consult
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø105 mm.
Swivel angle	30°
Rotation angle	355°
Weight	380 g.
Packaged weight	474 g.
Packaging dimensions	137 × 137 × 104 mm.
Units per package	20
Materials	Aluminium / Polycarbonate



Pointer is a directional LED downlight for recess-mounting applications. With a fine and narrow bezel, it stands out for its minimalist aesthetics, its perfect integration into the ceiling and the possibility of being easily directed towards any angle, as many times as required, just with a very gentle hand motion. Whatever may be the orientation of the adjustable light beam, Pointer always maintains the same aesthetic appearance. An advantage that increases the sensation of visual order of the ceiling and which makes Pointer unique in the market.

POLAR DIAGRAM

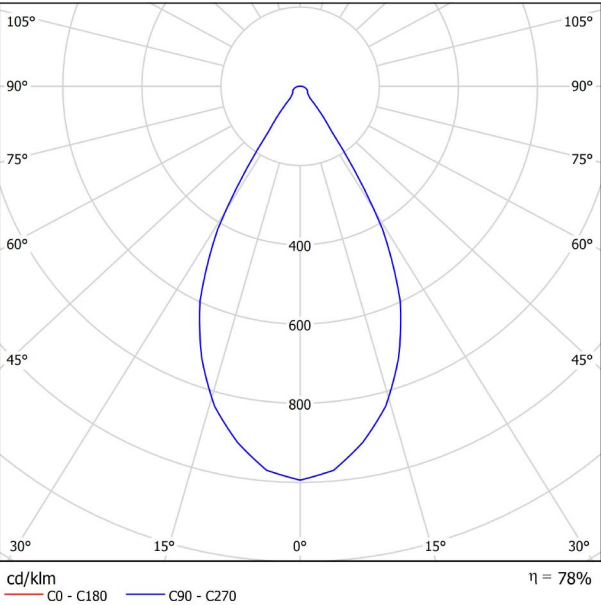

CONICAL DIAGRAM

