




## DIMENSIONS



## AWARDS



|           |                                             |
|-----------|---------------------------------------------|
| Name      | POINTER 300mA 11W DIM DALI/PUSH 56° 3000K W |
| Reference | A2713321W                                   |
| Color     | Matt white                                  |
| Category  | Ceiling Recessed                            |

## PRODUCT

|                                                   |                                         |
|---------------------------------------------------|-----------------------------------------|
| Light source                                      | LED                                     |
| Gross luminous flux                               | 1250 Lm                                 |
| Power                                             | 11 W                                    |
| Power values of the system                        | 12,5 W                                  |
| Colour temperature                                | 3000 K                                  |
| Colour Rendering Index                            | CRI>90                                  |
| Chromatic stability                               | Mac Adam Step 2                         |
| Light beam angle                                  | 56°                                     |
| Lighting efficiency                               | 78%                                     |
| Efficacy                                          | 114 Lm/W                                |
| Current intensity                                 | 300 mA                                  |
| Dimming                                           | DALI / Push - Other DIM, please consult |
| Control through bluetooth                         | Please Consult                          |
| Driver                                            | Incl.                                   |
| Fast connection of the driver to the mains supply | Please Consult                          |
| Emergency power supply                            | Please Consult                          |
| Electrical insulation class                       | □                                       |
| Voltage                                           | 220 V/240 V                             |
| Frequency                                         | 50/60 Hz                                |
| Energy efficiency                                 | A+                                      |
| LED lifespan                                      | L80B10 (Tj=85°C) >60.000h               |

## LIGHTING INFORMATION


## OTHER DATA

|                      |                           |
|----------------------|---------------------------|
| Ingress Protection   | IP20                      |
| Recess measurements  | Ø105 mm.                  |
| Swivel angle         | 30°                       |
| Rotation angle       | 355°                      |
| Weight               | 380 g.                    |
| Packaged weight      | 474 g.                    |
| Packaging dimensions | 137 × 137 × 104 mm.       |
| Units per package    | 20                        |
| Materials            | Aluminium / Polycarbonate |



Pointer is a directional LED downlight for recess-mounting applications. With a fine and narrow bezel, it stands out for its minimalist aesthetics, its perfect integration into the ceiling and the possibility of being easily directed towards any angle, as many times as required, just with a very gentle hand motion. Whatever may be the orientation of the adjustable light beam, Pointer always maintains the same aesthetic appearance. An advantage that increases the sensation of visual order of the ceiling and which makes Pointer unique in the market.

POLAR DIAGRAM

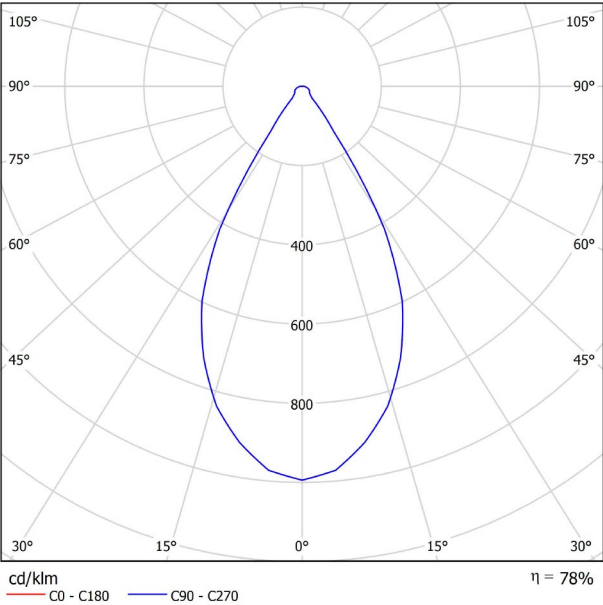

CONICAL DIAGRAM

