


4

3


2

1



**OUTPUT: ER32**  
**DIRECTION: SAME AS MACHINE SPINDLE**  
**MAX RPM: 3,500**  
**TORQUE: 726 in/lbs**  
**RATIO: 1:1**  
**WEIGHT: 32 lbs**  
**\* COOLANT SUPPLY THROUGH SPINDLE (1,000+ PSI)**

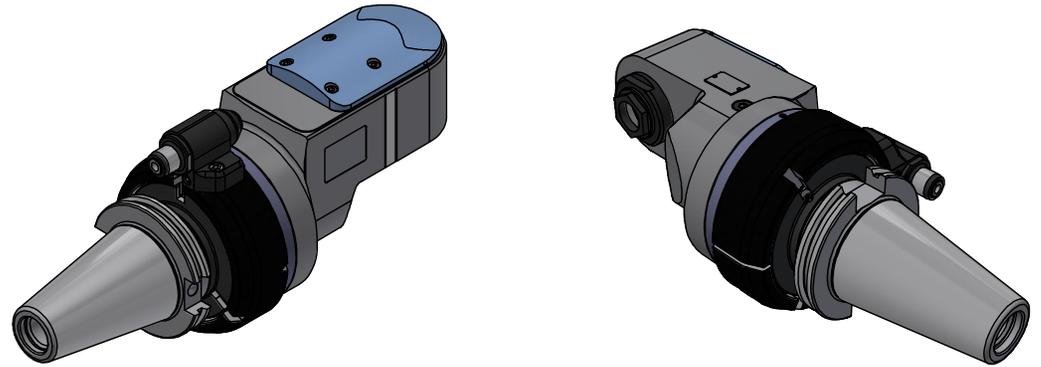

UNIVERSAL STOP BLOCK  
 (9.F18.INDEX)

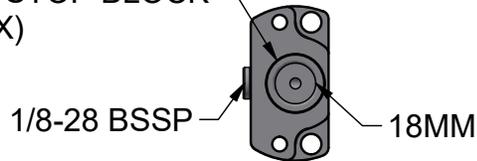

**\*\* NOT ABLE TO BE RUN DRY**

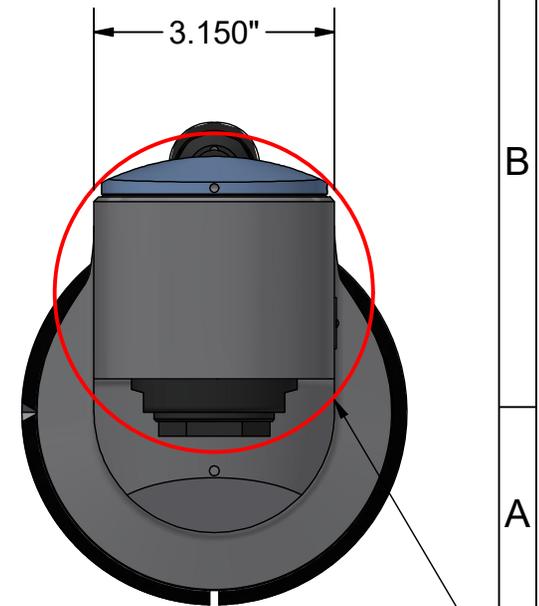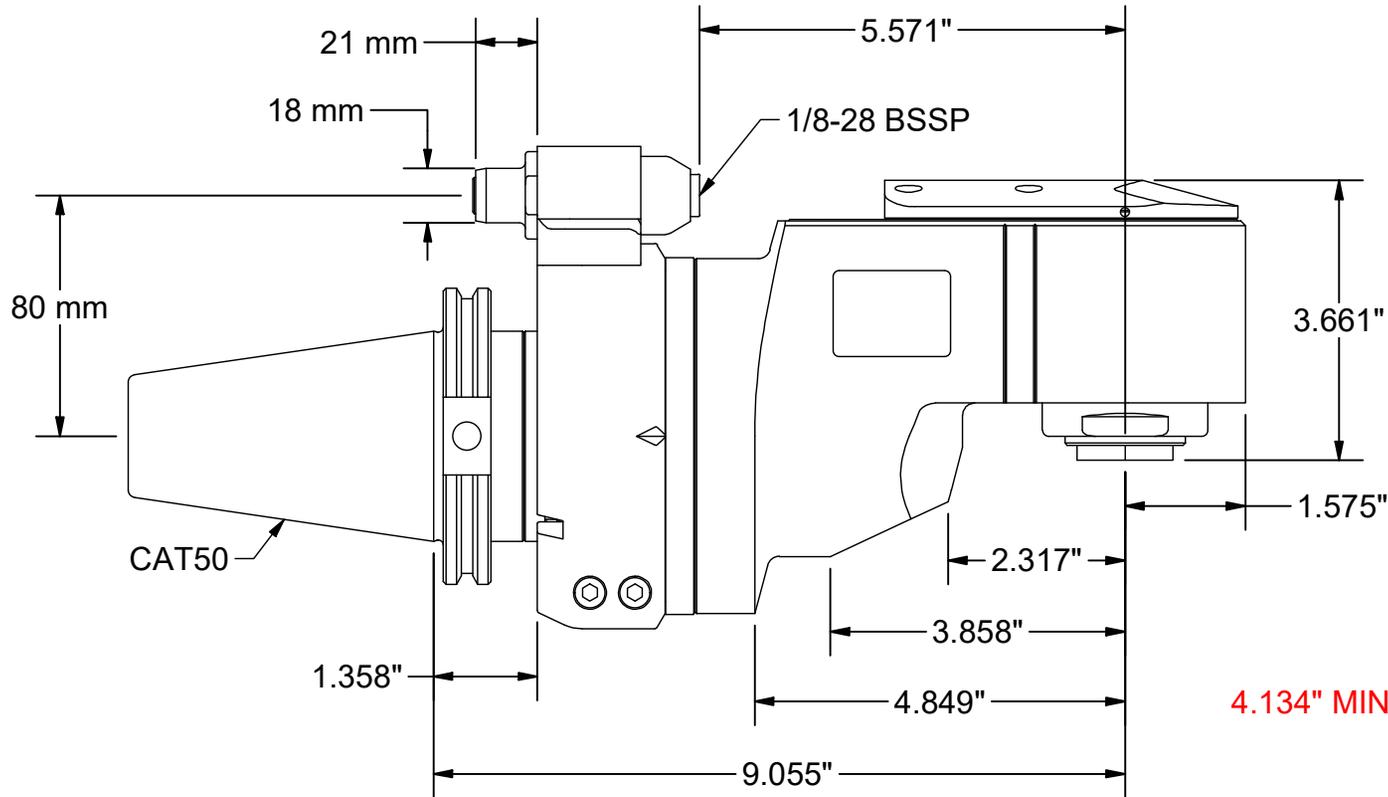

**4.134\"/>**

ITEMS SHOWN ON THIS DOCUMENT CONTAIN PROPRIETARY INFORMATION OF PARLEC INC. AND IS SUBJECT TO BEING RETURNED UPON REQUEST. IT SHALL NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN PERMISSION OF PARLEC INC. ANY AUTHORIZED REPRODUCTION MUST BEAR THIS ENTIRE LEGEND.

PART  
 NUMBER

**9.FR9.200C0-2C50**

**PARLEC**  
 (800) TOOL USA  
 WORLD HEADQUARTERS  
 101 PERINTON PARKWAY  
 FAIRPORT, NEW YORK 14450

