

Manufacturer:

AFL

Product Name:

AFL FUSEConnect® Splice-On SC Connector, 62.5µm (micron) Multimode Fiber, 3mm Beige Boot

Manufacturer Part Number:

FUSESC3M626

▶ [Click here for more details on the AFL FUSEConnect® Splice-On SC Connector, 62.5µm \(micron\) Multimode Fiber, 3mm Beige Boot](#)

FUSEConnect® Fusion-Spliced, Field-Installable Connectors

AFL's FUSEConnect fusion-spliced, field installable connectors are uniquely designed and feature only four to five components. The factory pre-polished ferrule eliminates the need for polishing, adhesives, and crimping in the field, which minimizes the potential for operator error and expensive connector scrap.

FUSEConnect utilizes a fusion splicer to terminate the connector in the field, addressing return loss concerns present in analog optical networks. This advanced process yields true APC performance for SC/APC and LC/APC configurations. FUSEConnect is compatible with Fujikura fusion splicers and most other fiber holder-based fusion splicing platforms.

Features


- Field installable
- No adhesives, crimping or polishing
- True APC performance
- Compatible with most fusion splicers

Applications

- Connectorization in:
 - RF-overlay FTTP networks
 - Cable TV backbone networks
 - Outside plant
 - FTTH
 - MDU FTTP Cabling
- Central office connector replacement
- Data center installation




FUSEConnect Connectors (SC, LC, ST)



FUSEConnect in Fusion Splicer

Specifications

PARAMETER	VALUE
Connector Type	SC, LC, ST
Cable Type	900 µm, 2 mm, 3 mm, 4.8 mm (SC only)
Polish	APC, UPC, PC
Insertion Loss	SM: 0.15 dB (average), 0.25 dB (maximum) / MM: 0.10 dB (average), 0.25 dB (maximum)
Return Loss	SM: ≤ -65 dB (APC), ≤ -55 dB (UPC) / MM: ≤ -35 dB (PC)

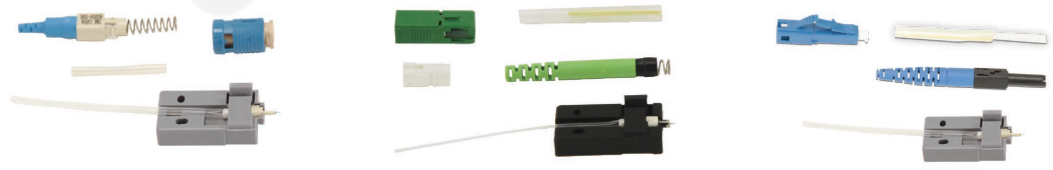

FUSEConnect Kits—ST (blue), SC (green), LC (blue)

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 3/17/2026.

**Manufacturer:**

AFL

Product Name:

AFL FUSEConnect® Splice-On SC Connector, 62.5µm (micron) Multimode Fiber, 3mm Beige Boot

Manufacturer Part Number:

FUDESC3M626



▶ [Click here for more details on the AFL FUSEConnect® Splice-On SC Connector, 62.5µm \(micron\) Multimode Fiber, 3mm Beige Boot](#)

FUSEConnect® Fusion-Spliced, Field-Installable Connectors

Ordering Information

Connector Type	Boot Type	AFL NO.*			
		UPC SM (Blue)	APC SM (Green)	PC 62.5 µm MM (Beige)	PC 50 µm LOMMF (Aqua) **
SC	900 µm	FUSE-SC9SMU-6	FUSE-SC9SMA-6	FUSE-SC9M62-6	FUSE-SC9M50L-6
	3 mm	FUSE-SC3SMU-6	FUSE-SC3SMA-6	FUSE-SC3M62-6	FUSE-SC3M50L-6
LC	900 µm	FUSE-LC9SMU-6	FUSE-LC9SMA-6	FUSE-LC9M62-6	FUSE-LC9M50L-6
	2 mm	FUSE-LC2SMU-6	FUSE-LC2SMA-6	FUSE-LC2M62-6	FUSE-LC2M50L-6
ST	900 µm	FUSE-ST9SMU-6	—	FUSE-ST9M62-6	FUSE-ST9M50L-6
	2 mm	FUSE-ST2SMU-6	—	FUSE-ST2M62-6	FUSE-ST2M50L-6
	3 mm	FUSE-ST3SMU-6	—	FUSE-ST3M62-6	FUSE-ST3M50L-6

* AFL NO. is for one pack of 6 pieces

** Laser Optimised MM Fiber (LOMMF) Compatible with OM2, OM3 and OM4 fibers.

Temperature Specifications

Temperature Range	
Operating Temperature	-40°C to +75°C

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 3/17/2026.