



**Manufacturer:**  
ÅngströmLap®

**Product Name:**  
ÅngströmLap® Aluminum Oxide Lapping Film Disc -  
2 inch 3µm (micron), PSA

**Manufacturer Part Number:**  
AO3T203P100



[Learn More](#)

▶ [Click here for more details on the ÅngströmLap® Aluminum Oxide Lapping Film Disc - 2 inch 3µm \(micron\), PSA](#)

## PRODUCT SPECIFICATIONS:

### Description by Application

FO Type Name: AO3-GT

Color: Yellow

### Tape Specifications

Total Thickness:  $92.0 \pm 2.0 \mu\text{m}$

Surface Roughness(Sa):  $1.8 \pm 0.6 \mu\text{m}$

### Abrasive Type

Particle Type: Aluminum Oxide

Grit Size: 3µm

### Base Film Type

Base Film Material: Poly-ethylene terephthalate

Base Film Thickness: 3 mil (75 µm)

### Process Parameters

Type: GT

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](https://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 1/2/2026.

**Manufacturer:**

ÅngströmLap®

**Product Name:**ÅngströmLap® Aluminum Oxide Lapping Film Disc -  
2 inch 3µm (micron), PSA**Manufacturer Part Number:**

AO3T203P100

[Learn More](#)

▶ [Click here for more details on the ÅngströmLap® Aluminum Oxide Lapping Film Disc - 2 inch 3µm \(micron\), PSA](#)

## PRODUCT SPECIFICATIONS:

**Unit:** Standard packaging of 100

Roll - Product that has already been slit down for samples or to product specifications requested by the customer. This specification standard covers tapes for various applications.

Disk - Product that has been slit down into rolls then die cut into circular disks to conform to customer specified sizes. This specification standard covers disks for various applications

Sheet - Product that has been slit down into rolls then sheet cut into rectangular sheets to conform to customer specified sizes. This specification standard covers sheets for various applications

**Description:***Example: AO3-GT*

| Abrasive Material | Average Grit Size | Process Type      |                    |
|-------------------|-------------------|-------------------|--------------------|
|                   |                   | G                 | T                  |
| Aluminum Oxide    | 3 µm              | Mixing Ratio Type | Surface Shape Type |

**Lot Description:**

Automatic numbering by enterprise resource planning system.

*Example: 0000012345***Product Specifications:**

Mipox product standards are specified by the abrasive film Surface roughness and the total thickness diameter and length.

**Storage Environment:**

- Temperature: 10 to 50 centigrade
- Humidity: 20 to 80%

**Product Life:** Mipox product life is guaranteed up to 5 years from the manufactured date

**Recommended Usage:** Usage amounts are conservative estimates and may vary based on individual conditions. Please contact Fiber Optic Center to optimize these usage numbers. Specifications subject to change without notice.

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 1/2/2026.



**Manufacturer:**  
ÅngströmLap®


**Product Name:**  
ÅngströmLap® Aluminum Oxide Lapping Film Disc -  
2 inch 3µm (micron), PSA

**Manufacturer Part Number:**  
AO3T203P100



Learn More

▶ Click here for more details on the ÅngströmLap® Aluminum Oxide Lapping Film Disc - 2 inch 3µm (micron), PSA

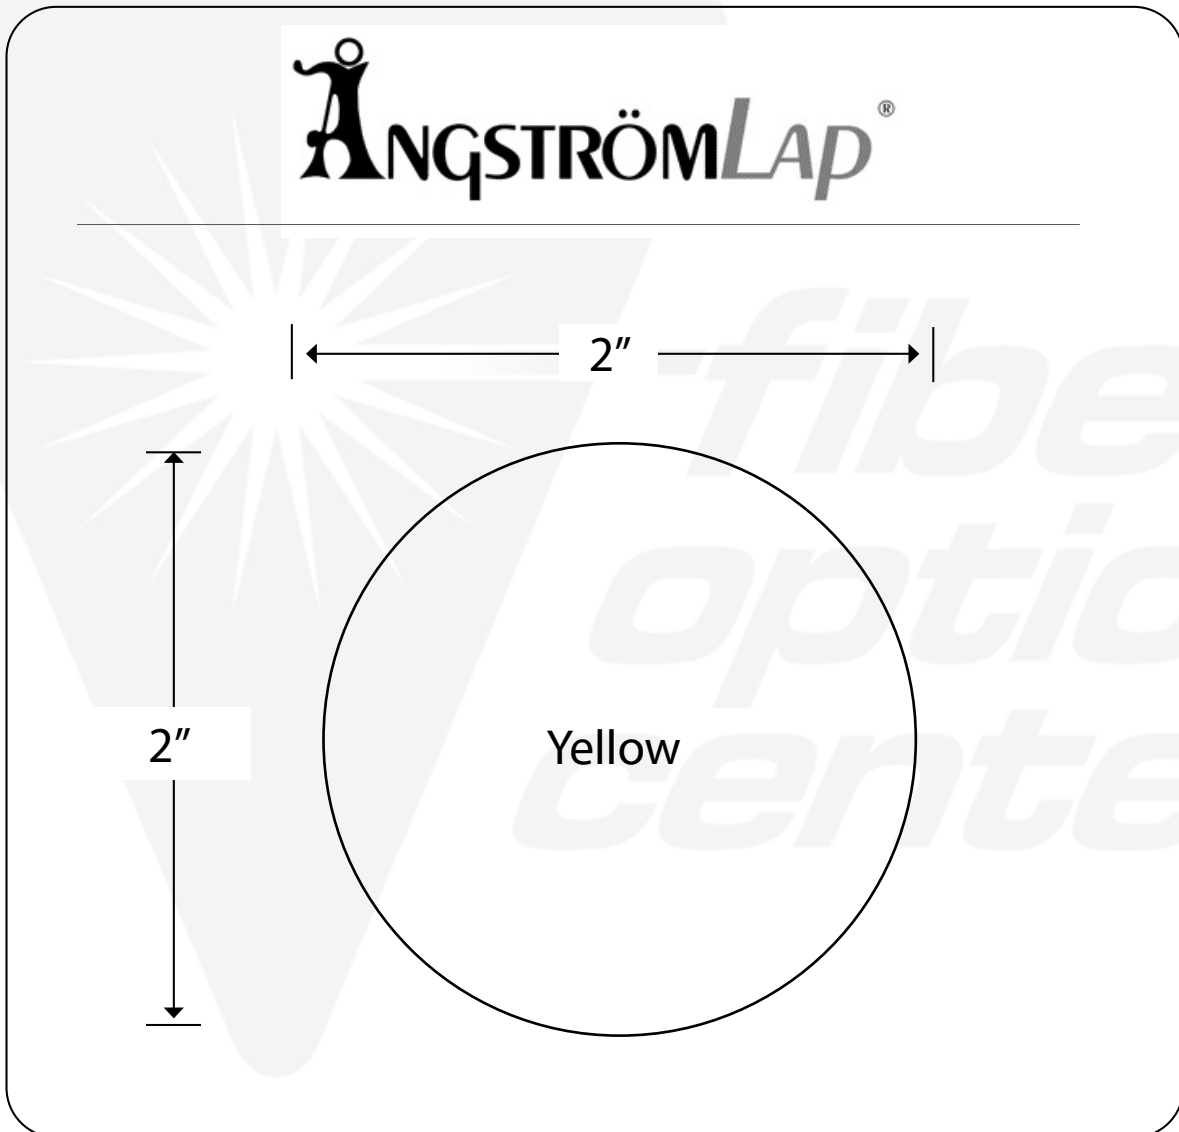

**Contact the professionals at Fiber Optic Center for a quote or to get more details.**

[focenter.com](http://focenter.com) • 508-992-6464 | (800) 473-4237 • [sales@focenter.com](mailto:sales@focenter.com)

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice. FOC last update 1/2/2026.