

Manufacturer:

Techon

Product Name:

Techon TS350 Precision Dispensing Machine

Manufacturer Part Number:

TS350



The TS350 Series dispenses low, medium and high-viscosity fluids accurately and consistently and is immediately usable anywhere in the world with its accompanying tools, accessories and universal power supply. A highly responsive air pressure and vacuum management system, coupled with a digital timing circuit and digital pressure/vacuum read out provides repeatable fluid dispensing.

The user friendly firmware provides an option of programming up to 10 varied, sequenced or individual shots. These systems have a user programmable manual (purge) and automatic dispense cycle settings (program and time) and they feature a "Teach Mode" for determining the dispensing time required with dispensing output is unknown. Available in1 -100psi (0.07 - 6.9 bar) for general applications, and 0 - 15psi (0.07 - 1.0 bar) for specific low viscosity applications.

The dispenser is shipped with the following items:

- Universal power supply
- Foot switch
- Air hose
- Sample tips
- 10cc syringe barrel and receiver head
- Syringe barrel stand

TYPICAL APPLICATIONS

- Applying lubricant in Automotive electrical switches
- Dispensing UV beads in LCD bonding applications
- Impregnating humidity indicator cards (HIC) with fluid chemical in semiconductor packaging applications

KEY FEATURES AND BENEFITS

- Universal power supply for worldwide use
- 20 x 4 LCD display with back lighting
- · All read outs displayed digitally
- Digital timing from 0.008 60 seconds
- 10 programmable memories
- 4 modes of operation Timed, Purge, Teach and Interrupt
- Adjustable vacuum suck back to control fluid tailing and waste





Manufacturer:

Techon


Product Name:


Techon TS350 Precision Dispensing Machine

Manufacturer Part Number:

TS350

INDENTIFICATION OF FEATURES

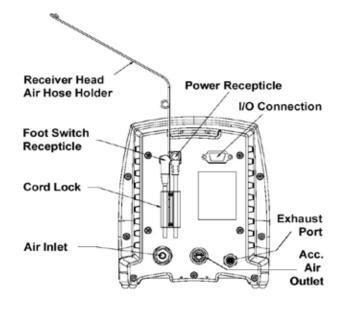


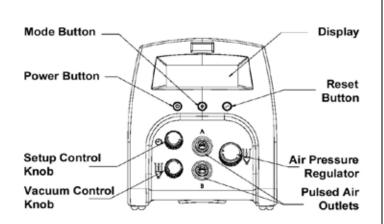

SPECIFICATIONS & PART NUMBERS

| Part Number: | TS350 | TS355 |
|--------------------------|---------------------------|---------------------------|
| Size (Imperial): | 6" W x 7.7" L x 7.2" H | 6" W x 7.7" L x 7.2" H |
| Size (Metric): | 152mm x 195mm x 183mm | 152mm x 195mm x 183mm |
| Weight: | 2.6 lb (1200g) | 2.6 lb (1200g) |
| Pressure Range: | 0 to 100psi (0-6.9 bar) | 0 to 15psi (0-1.0 bar) |
| Cycle Rate: | 1200/min. | 1200/min. |
| Timing Range: | 0.008 – 60 seconds | 0.008 – 60 seconds |
| Timing Repeat Tolerance: | +/- 0.001% | +/- 0.001% |
| | 400 040 1/4 0 | 400 040) (400 |
| Input Voltage: | 100 – 240 VAC | 100 – 240 VAC |
| Input Frequency: | 50 – 60 Hz | 50 – 60 Hz |
| Cycle Modes: | Timed, Purge, Teach, Int. | Timed, Purge, Teach, Int. |
| Certification: | CE, TUV-GS and NRTL | CE, TUV-GS and NRTL |

Dimensions are in inches [mm]

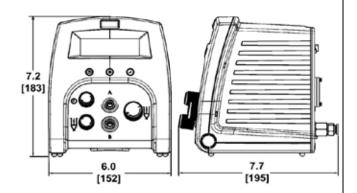

ACCESSORIES

 Syringe barrels: The dispenser can be connected to any size syringe barrel or color. The syringe barrels connect to a receiver head which is the link between the dispenser and syringe barrel. Receiver heads are available with 3ft (0.9m) or 6ft (1.8m) air tubing