


**Product Name:** VistaRope Race 7  
**Model Number:** 6268SP  
**Size:** Length: 14' 5"  
Width: 10' 4"  
Height: 8' 2"  
**Fall Height:** 7'  
**Foundations:** 2  
**Concrete Volume:** 1.3 cubic yards  
**COMPLIANT WITH:** ASTM F-1487  
CSA Z614  
**Ages:** 5-12 years  
**Use Zone:** Length: 26' 5"  
Width: 22' 4"

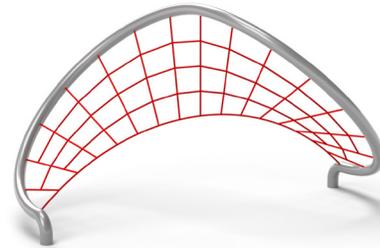

**Technical Details:**

**Support Post**

Support Posts shall be 5-1/2" (140mm) diameter steel tubing. After fabrication the frame shall be powder coated in accordance with the specifications herein.

**Climbing Nets**

20mm diameter rope consists of 6 main strands, each strand containing 24 galvanized steel reinforcing strands within a polyamide sleeve, wrapped around a solid polyamide core for a total of 144 reinforcing strands. Ropes shall achieve a Class 7-8 colorfastness rating.

**Rope Ball Connectors and End Fittings**

One-piece compressed aluminum ball connector or end fitting, compressed in place with 150,000 pounds source (667kN) to prevent the connection from moving and causing premature cable wear.

**Fasteners**

All fasteners shall be stainless steel with locking patch or locking compound (by others).

**Metal Finish**

Polyester (Powder) Coating – The polyester coating shall be uniformly applied by the electro-static method to a minimum thickness of four mils. Promptly after application of the powder, the coating shall be oven-cured at 350 degrees Fahrenheit. The color(s) of the polyester coating shall be from the manufacturer's standard color selection.

**Installation**

Installation recommended by a licensed playground contractor, trained and certified on the applicable playground installation methods and standards, preferably certified by manufacturer or National Playground Contractors Association.