


Dual




Opal/UGR


Dual inserted track

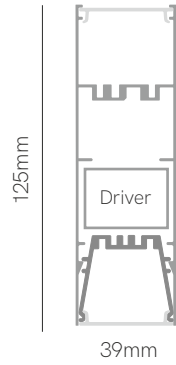

Spot not included

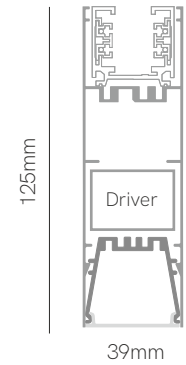

Track/UGR



\*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories:  pages 326-333

 pages 334-335




Technical Information

Power	18-24W / 28-35W / 46-52W
Lumens	Up 2.016 lm - 6.256 lm / Down 2.688 lm - 7.072 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 5	Opal/UGR (81°) 6	1.130mm (18-24W) 3	2.700K (112 lm/W) 2	On / Off 1	<input type="checkbox"/> White (9003) 1
	Track/UGR (81°) 9	1.690mm (28-35W) 5	3.000K (128 lm/W) 3	Dali 2	<input type="checkbox"/> Black (9005) 2
		2.530mm (46-52W) 7	4.000K (136 lm/W) 4	Push 3	<input checked="" type="checkbox"/> Custom RAL
			5.000K (136 lm/W) 5	Casambi 5	

Code: 5 



 Consult delivery terms and conditions.  
\*Create your code according to your preferences.

