
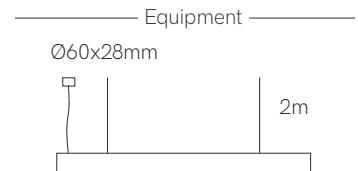


Evo



\*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories: page 327

pages 326-333

pages 334-335




Technical Information

Power	38W / 47W / 56W / 74W
Lumens	3.268 lm - 8.954 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code <b>2</b>	Black Slats (60°) <b>N</b>	1.170mm (38W) <b>2</b>	<b>2.700K</b> (91-104 lm/W) <b>2</b>	On / Off <b>1</b>	<input type="checkbox"/> White (9003) <b>1</b>
	White Slats (60°) <b>P</b>	1.450mm (47W) <b>3</b>	<b>3.000K</b> (96-109 lm/W) <b>3</b>	Dali <b>2</b>	<input checked="" type="checkbox"/> Black (9005) <b>2</b>
		1.730mm (56W) <b>4</b>	<b>4.000K</b> (103-121 lm/W) <b>4</b>	Push <b>3</b>	Custom RAL
		2.290mm (74W) <b>6</b>	<b>RGB-W</b> (86 lm/W) <b>8</b>	Casambi <b>5</b>	
			<b>2.700-6.500K</b> (95/105 lm/W) <b>9</b>	Tuya <b>7</b>	

Code: **2**



Consult delivery terms and conditions.

\*Create your code according to your preferences. RGB-W and CCT 2.700-6.500K only works with driver 5 Casambi and 7 Tuya.

