



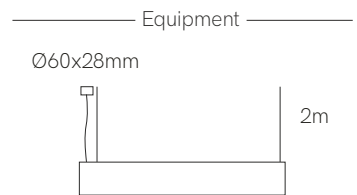

Evo fly

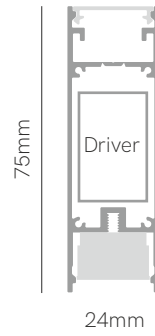

*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories:  pages 326-333  pages 334-335





Technical Information

| | |
|--------------|-----------------------|
| Power | 44W / 55W / 66W / 77W |
| Lumens | 3.872 lm - 9.317 lm |
| Installation | Pendant |
| Material | Aluminium 6063 |
| PCB | Down Rigid / Up Flex |

| Code | Diffuser (Angle) | Size (Power) | CCT (lm/W) | Driver | Colour |
|---------------|------------------------|------------------------|--|-------------------|--|
| Code 4 | Down Black Slats (60°) | 1.120mm (44W) 4 | 2.700K Down (91-104 lm/W) Up (88 lm/W) | On / Off 1 | <input type="checkbox"/> White (9003) 1 |
| | Up Opal | 1.400mm (55W) 5 | | Dali 2 | <input type="checkbox"/> Black (9005) 2 |
| | Down White Slats (60°) | 1.680mm (66W) 6 | 3.000K Down (96-109 lm/W) Up (92 lm/W) | Push 3 | <input checked="" type="checkbox"/> Custom RAL |
| | Up Opal | 1.960mm (77W) 7 | | Casambi 5 | |
| | | | 4.000K Down (104-121 lm/W) Up (96 lm/W) | | |
| | | | 2.700K Down (95-105 lm/W) | | |
| | | | 6.500K Up (100 lm/W) | | |

Code: **4**



 Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-6.500K only works with driver 5 Casambi.

