



Fine running



Compatible profiles.

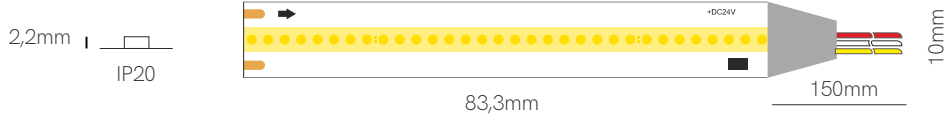

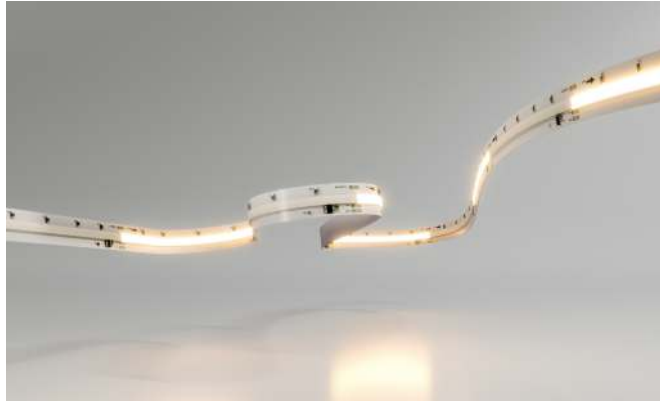

Technical Information

|           |                    |
|-----------|--------------------|
| V / A / W | 24V / 0,5A / 12W/m |
| IC        | WS2811 (12px/m)    |

| Code | Code              | Lumens/w | Lumens/m   | CCT   | IP   |
|------|-------------------|----------|------------|-------|------|
|      | SP1270 <b>New</b> | 75 lm/w  | 900 lm/m   | 2700K | IP20 |
|      | SP1300            | 79 lm/w  | 950 lm/m   | 3000K | IP20 |
|      | SP1400            | 87 lm/w  | 1.050 lm/m | 4000K | IP20 |

\*Available in reel of 5 meters. Accessories pages 317-319.

Control

| Code  | Version                  | Power Max | Pixels Max | VDC IN |
|---|--------------------------|-----------|------------|--------|
|  SP-9812 | Controller               | -         | -          | 24 VDC |
|  SP-6329 | Running Touch Controller | 8A        | 1.024      | 24 VDC |



3 YEARS WARRANTY | 
 12 W/m | 
 360 LED/m | 
 CRI ≥90 | 
 III | 
 24 VDC | 
 83,3mm  | 
 SPI | 
  COB