



Grip

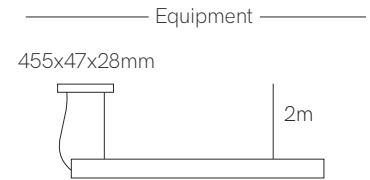


\*Finished luminaire. Includes suspension kit, power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335

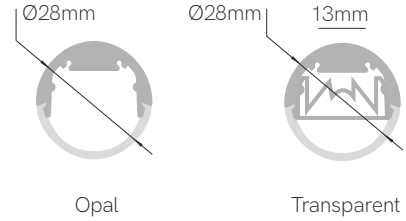


Technical Information

Power	26W / 33W / 39W / 46W
Lumens	2.522 lm - 4.968 lm
Installation	Pendant
Material	Aluminium and polycarbonate
PCB	Flex (Fine 52)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code <b>2</b>	Opal (100°)	<b>4</b> 1.130mm (26W)	<b>3</b> 2.700K (97 lm/W)	<b>2</b> On / Off	<b>1</b> ● Black (9005)
	Transparent (30°)	<b>8</b> 1.410mm (33W)	<b>4</b> 3.000K (103 lm/W)	<b>3</b> Dali	<b>2</b>  Custom RAL
		<b>5</b> 1.690mm (39W)	<b>5</b> 4.000K (108 lm/W)	<b>4</b> Push	
		<b>6</b> 1.970mm (46W)	<b>6</b> RGB (100 lm/W)	<b>8</b> Casambi	
			<b>9</b> 2.700-5.500K (105 lm/W)	<b>7</b> Tuya	

Code: **2**



 Consult delivery terms and conditions.

\*Create your code according to your preferences. RGB and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

