




Kubo E

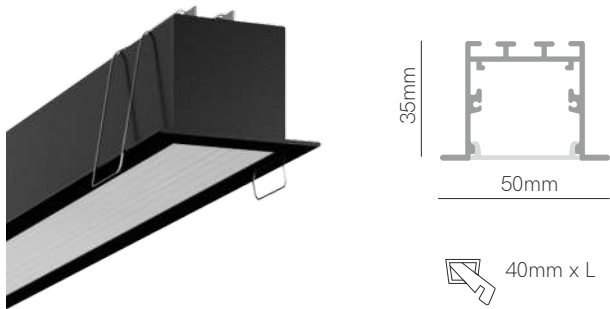


*Finished luminaire. Includes driver, spring clips, power cable and end caps.




Kubo

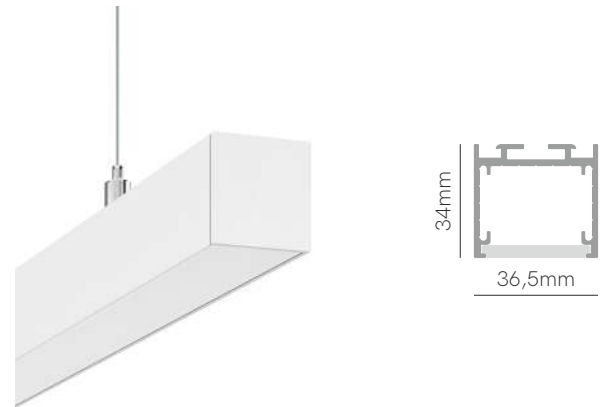

*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.

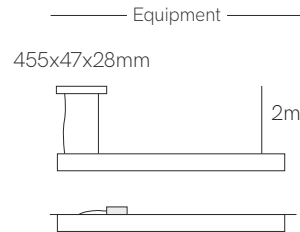

Control accessories:  page 327

 pages 326-333


 pages 334-335




Technical Information

Power	31W / 38W / 46W / 54W
Lumens	3.100 lm - 6.264 lm
Installation	Recessed and Surface / Pendant

Material	Aluminium 6063
PCB	Rigid / RGB-W Flex

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Kubo E 5	Opal (100°) 5	1.130mm (31W) 3	2.700K (100 lm/W) 2	On / Off 1	<input type="checkbox"/> White (9003) 1
Kubo 7		1.410mm (38W) 4	3.000K (105 lm/W) 3	Dali 2	<input checked="" type="checkbox"/> Black (9005) 2
		1.690mm (46W) 5	4.000K (111 lm/W) 4	Push 3	 Custom RAL
		1.970mm (54W) 6	5.000K (116 lm/W) 5	Casambi 5	
			RGB-W (100 lm/W) 8	Tuya 7	
		2.700-5.500K (105 lm/W) 9			

Code: **5**



 Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

