


Minimus




*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.

Control accessories:  page 327  pages 326-333  pages 334-335

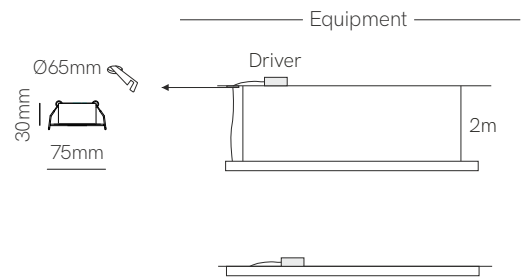

Technical Information

Power	25W / 31W / 37W / 43W
Lumens	2.425 lm - 4.644 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Flex (Fine 52)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 5	Opal prism (100°) 8	1.170mm (25W) 2	2.700K (97 lm/W) 2	On / Off 1	<input type="checkbox"/> White (9003) 1
		1.420mm (31W) 4	3.000K (103 lm/W) 3	Dali 2	<input checked="" type="checkbox"/> Black (9005) 2
		1.720mm (37W) 6	4.000K (108 lm/W) 4	Push 3 ⓘ	 Custom RAL
		1.970mm (43W) 8		Casambi 5	
				Tuya 7	

Code: **5** **8**



ⓘ Consult delivery terms and conditions.
*Create your code according to your preferences.

