




Nano Pulsar r / sq recessed

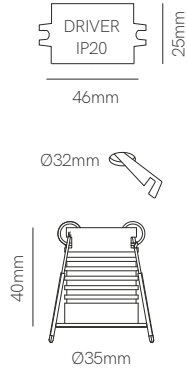

Nano Pulsar r / sq trim



Nano Pulsar r / sq surface



Technical Information

Power	3,5W	-	-
Driver	4,7 VDC 700 mA	-	-
Installation	Recessed	Recessed	Surface
Color Temperature	2.700K / 3.000K / 4.000K	-	-
Lumens	170 lm / 180 lm / 200 lm	-	-
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White-matt gold/Black-matt gold	White / Black
Code	<ul style="list-style-type: none"> ○ 2.700K 4297 ○ 3.000K 4298 ○ 4.000K 4299 ● 2.700K 4300 ● 3.000K 4301 ● 4.000K 4302 □ 2.700K 4451 □ 3.000K 4452 □ 4.000K 4453 ■ 2.700K 4454 ■ 3.000K 4455 ■ 4.000K 4456 ① Custom RAL 	<ul style="list-style-type: none"> ● 5208 ● 5209 ■ 5210 ■ 5211 	<ul style="list-style-type: none"> ○ 4410 ● 4411 □ 4412 ■ 4413 ① Custom RAL

1/50

1/4/300

1/50



① Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,5 | CRI ≥80 | 30° | 50/60 Hz | | +40°C / -20°C