



Urban asymmetric E



Urban asymmetric



*Spring clips included.



Urban asymmetric E



Urban asymmetric



Control accessories: page 327

pages 326-333

pages 334-335

Technical Information

Power	25W / 31W / 37W / 43W / 55W
Lumens	1.650 lm - 4.290 lm
Installation	Recessed and Surface / Pendant
Material	Aluminium 6063
PCB	Flex (Fine 52)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Asymmetric E 3	Opal asym. (30°/60°) 8	1.130mm (25W) 3	2.700K (66 lm/W) 2	On / Off 1	<input type="checkbox"/> White (9003) 1
Asymmetric 6		1.410mm (31W) 4	3.000K (72 lm/W) 3	Dali 2 N	<input type="checkbox"/> Black (9005) 2
		1.690mm (37W) 5	4.000K (78 lm/W) 4	Push 3 i	Custom RAL
		1.970mm (43W) 6		Casambi 5	
		2.530mm (55W) 7		Tuya 7	


Code:

i Consult delivery terms and conditions.
*Create your code according to your preferences.


Common accessories



Urban asymmetric E accessories



Urban asymmetric accessories

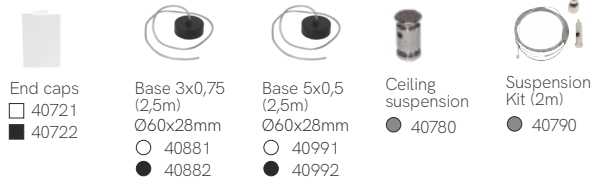

Accessories pages 176-179.

