

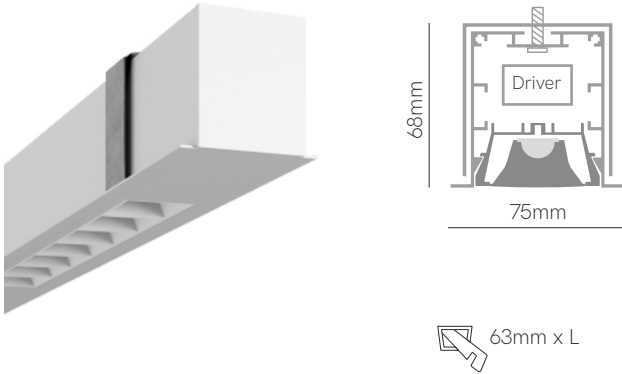



Urban fly E




\*Finished luminaire.  
Includes clips, power cable and end caps.



Urban fly

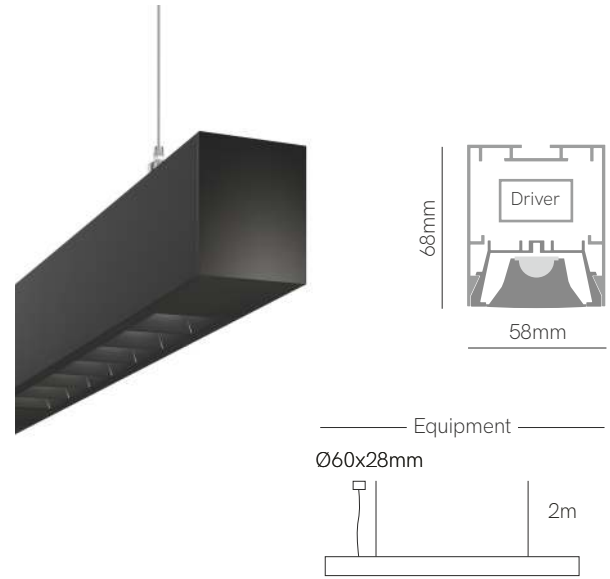

\*Finished luminaire. Includes suspension kit, power cable and end caps.



Control accessories: pages 326-333

pages 334-335

Technical Information


Power	2x14W / 3x14W / 4x14W / 6x14W
Lumens	3.192 lm - 11.424 lm
Installation	Recessed / Pendant

Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver / Emergency	Colour
Fly E <b>8</b>	Optical (50°) <b>9</b>	1.130mm (28W) <b>4</b>	<b>2.700K</b> (114 lm/W) <b>2</b>	On / Off <b>1</b>	<input type="checkbox"/> White (9003) <b>1</b>
Fly <b>6</b>		1.690mm (42W) <b>5</b>	<b>3.000K</b> (130 lm/W) <b>3</b>	Dali <b>2</b>	<input checked="" type="checkbox"/> Black (9005) <b>2</b>
		1.130mm (56W) <b>7</b>	<b>4.000K</b> (136 lm/W) <b>4</b>	Push <b>3</b>	<input checked="" type="checkbox"/> Custom RAL
		1.690mm (84W) <b>8</b>		Casambi <b>5</b>	
				Emerg.+ On / Off <b>K1</b>	
				Emerg.+ Dali <b>K2</b>	
				Emerg.+ Push <b>K3</b>	
				Emerg.+ Casambi <b>K5</b>	

Code:  **9**

Emergency  
4.000K 200lm | 1/3H.  
EN 60598-2-2



Accessories pages 176-179. Consult delivery terms and conditions.

