



Vision



*Finished luminaire. Includes suspension kit and power cable.

Control accessories: page 327 pages 326-333 pages 334-335

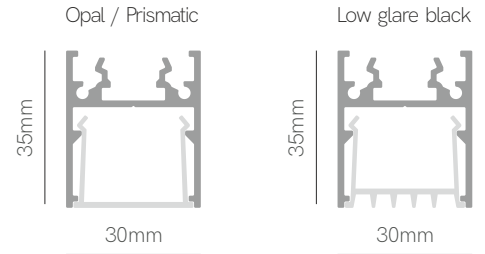


Technical Information

Power	33W / 42W / 51W / 59W
Lumens	1.980 lm - 9.440 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code V	Opal (90°)	4 1.130mm (33W)	3 2.700K (150 lm/W)	2 On / Off	1 <input type="checkbox"/> White (9003)
	Prismatic (70°)	6 1.410mm (42W)	4 3.000K (155 lm/W)	3 Dali	2 <input type="checkbox"/> Black (9005)
	Low glare black	9 1.690mm (51W)	5 4.000K (160 lm/W)	4 Push	3 Custom RAL
		6 1.970mm (59W)	8 RGB-W (60 lm/W)	5 Casambi	
			9 2.700-5.500K (100 lm/W)	7 Tuya	

Code: **V**



Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

