




Zero direct


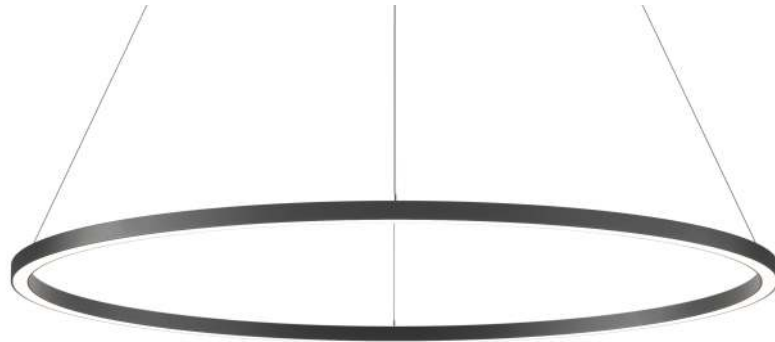


Ø520/800/1.200/1.500/3.000mm


Tolerance ±10%



Equipment



*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories:  page 327

 pages 326-333

 pages 334-335




Technical Information

Power	35W / 55W / 75W / 94W / 189W
Lumens	2.310 lm - 14.742 lm
Installation	Surface / Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 1	Opal (100°) 7	520mm (35W) 0	2.700K (66 lm/W) 2	On / Off 1	○ White (9003) 1
		800mm (55W) 2	3.000K (72 lm/W) 3	Dali 2	● Black (9005) 2
		1.200mm (75W) 6	4.000K (78 lm/W) 4	Push 3 ⓘ	● Matt Gold 4
		1.500mm (94W) 8	2.700-5.500K (70 lm/W) 9	Casambi 5 ⓘ	● Silver 5
		3.000mm (189W) 9		Tuya 7 ⓘ	● Custom RAL
		Custom C			

Code: **1** **7** ■ ■ ■ ■ ■



ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

